


参照ホイール

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included Recommended tyre sizes: 21 to 28 mm

Minimum cog width: 7.5mm

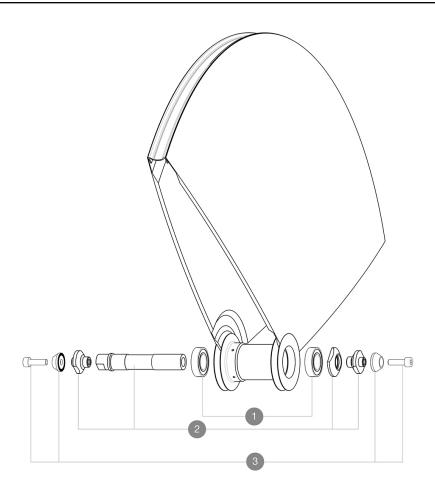

HUB SHELLS

1	M40129	KIT 2 BEARINGS 6902 15x28x7
2	11188701	COMETE FRONT AXLE TRACK
3	M40124	M6 AXLE BOLTS FRT TRACK WHEEL



MAVIC Comete Track RIO

付属品

13 /P3 HH		
Fixing nuts (M40124) 1		
Valve extender (118 952 01) 1		
Wheelbag (V24 801 01) 1	MANUE	
Cog lock nut (323 971 01) 1	0	
User guide		

Specifications

リム

■Tyre : tubular

ホイールハブ

Body: aluminum Axle material : aluminum
Sealed cartridge bearings

Fixed cog

VERSIONS

·Color : Black only

ホイールの重み

ホイール重量(クイックリリー スおよびクリンチャー/チュー ブラーを除く)(g):