


ASTM CATEGORY 2 : road and offroad with jumps less than 15cm  
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included  
Recommended tyre sizes: 25 to 32 mm  
Max. Pressure: 25mm 7.7 bars - 110 PSI

## 参照ホイール

F70861 KsyProCarbSLT HR Ft SV

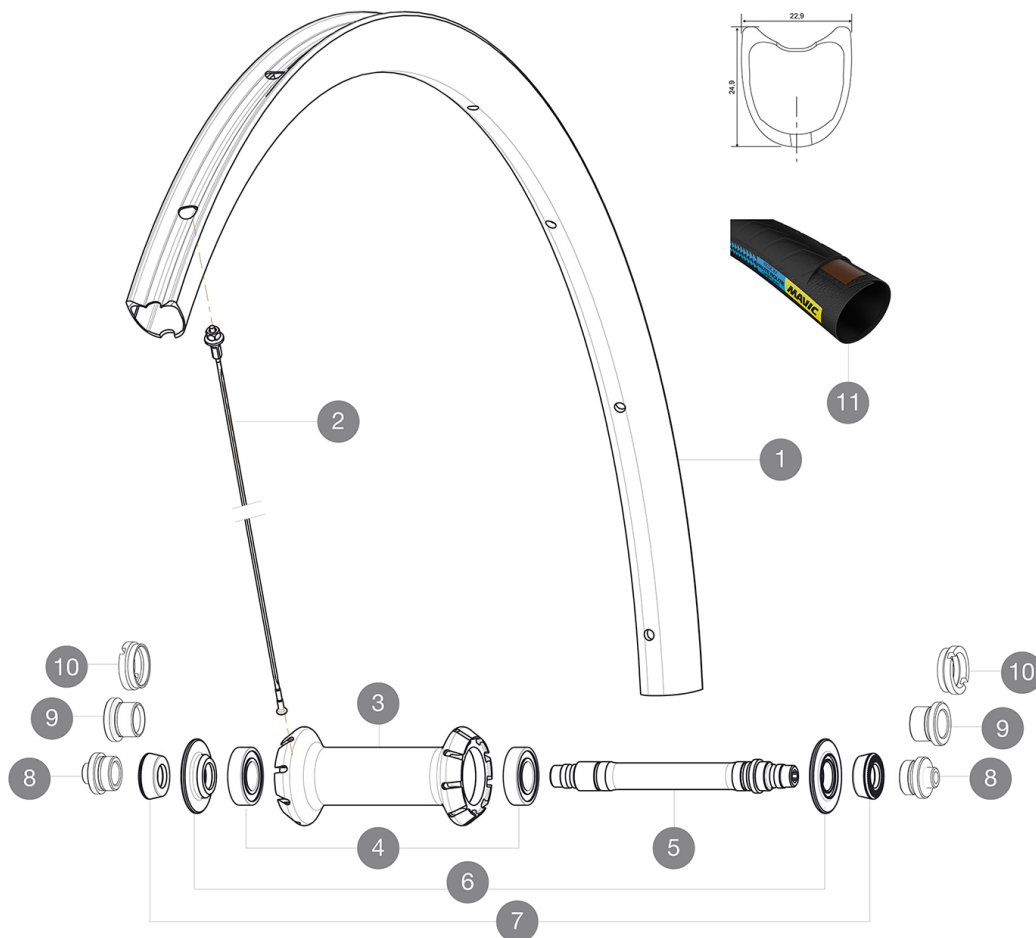

## RIMS



バルブ穴径 (MM) : 6,5 :

|   |          |                                                         |
|---|----------|---------------------------------------------------------|
| 1 | V2730110 | KIT FRONT RIM KSYRIUM PRO CARBON SL TUBULAR HAUTE ROUTE |
|---|----------|---------------------------------------------------------|

## SPOKES

|   |          |                                                              |
|---|----------|--------------------------------------------------------------|
| 2 | V2271301 | KIT 9 FT KSYRIUM PRO CARB SL C/T SPK 287mm - while stock las |
| 2 | V3663801 | KIT 12 FRT KSYR PRO CARB SL C/UST/T & NDS COSMIC PRO CARB SL |

## HUB SHELLS

|   |          |                                                         |
|---|----------|---------------------------------------------------------|
| 4 | V2540201 | KIT 2 FRONT BEARINGS 12x24x6 CERAMIC - while stock last |
| 4 | M40131   | KIT BEARINGS FRONT 12x24x6 6901 (IO track)              |
| 5 | 30870001 | FRONT AXLE ROAD RIM BRAKING QRM +                       |
| 6 | V2252501 | FRONT SETTING NUT & DUST PROTECTOR MY16                 |

## TYRES

|    |          |                                |
|----|----------|--------------------------------|
| 11 | 39435725 | Yksion Pro GripLink HR Tubular |
|----|----------|--------------------------------|

## ADAPTERS

|    |          |                                        |
|----|----------|----------------------------------------|
| 7  | 35117301 | FRONT OR REAR FORK REST KIT R-SYS 2013 |
| 8  | B4104301 | 9mm FT road Axle Adapters 16           |
| 9  | B4104201 | 12mm FT road Axle Adapters 16          |
| 10 | B4104401 | 15mm FT Road Axle Adapters 16          |



# Ksyrium Pro Carbon SL T HR

## 付属品

|                                                                                 |  |
|---------------------------------------------------------------------------------|--|
| BR601 quick releases<br>(V24 501 01 frt, V24 502 01 rear)<br>1                  |  |
| Carbon brake pads<br>(V24 603 01 Shimano/Sram, V24 604 01 Campagnolo)<br>1 pair |  |
| Multifonction adjustment wrench<br>(325 423 01)<br>1                            |  |
| "Haute Route" special edition wheelbags<br>1                                    |  |
| User guide                                                                      |  |

## COMPATIBILITY

|                                                                                      |  |
|--------------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram or Campagnolo, convertible to XD-R with optional driver body |  |
| Front axle: Quick Release only                                                       |  |
| Rear axle: Quick Release only                                                        |  |

## Specifications

### リム

- Material : 3K carbon fibers
- Height : 25mm
- Drilling : traditional
- Brake track : carbon with TgMAX technology
- Brake track : carbon
- Valve hole diameter : 6.5 mm
- Tyre : tubular
- ETRTO size : 28" tubular

### スポーク

- Material : steel
- Shape : straight pull, bladed, double butted
- Nipples : aluminum, ABS
- Count : front 18, rear 24
- Lacing : front radial, rear Isopulse

### ホイールハブ

- Front and rear bodies : aluminum
  - Axle material : aluminum
- High quality ceramic bearings by CeramicSpeed (R)
- Freewheel : Instant Drive 360

### VERSIONS

- Color : Black only

### ホイールの重み

ホイール重量 ( クイックリリースおよびクリンチャー/チューブラーを除く ) ( g ) : 515