


ASTM CATEGORY 2 : road and offroad with jumps less than 15cm
 For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included
 Recommended tyre sizes: 25 to 32 mm
 28 42 mm
 28mm 7.7 bars - 110 psi, 30mm 5.8 bars - 85 psi

参照ホイール

F71481 AksAIRDCL700Ft QRx100

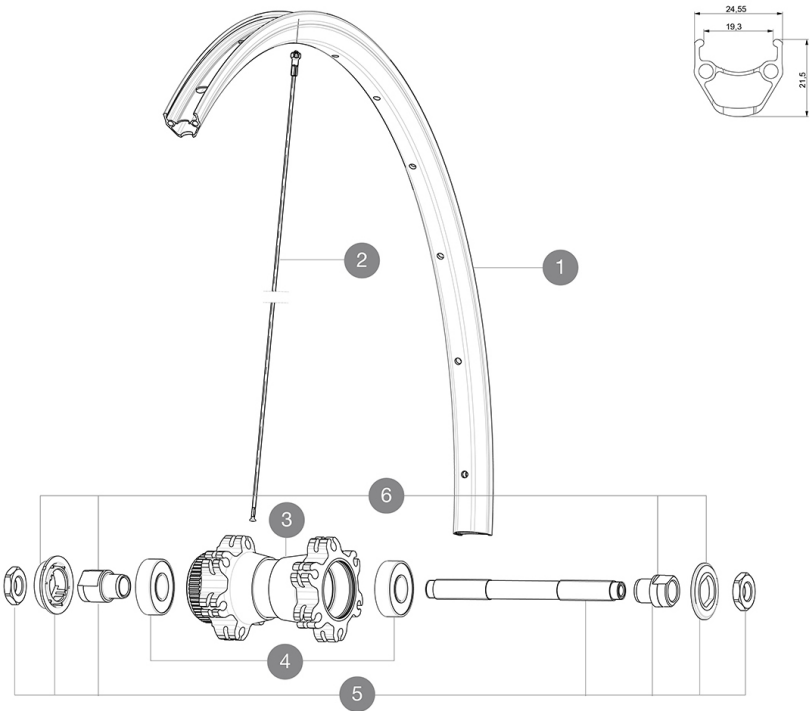

RIMS



&NBSP;:

1 V2730315 KIT FRONT/REAR RIM AKSIUM ALLROAD 700

SPOKES

2 V2277201 KIT 12 FRONT 9/12mm AKSIUM DISC ALLROAD 700 ROUND SPOKE 296m

HUB SHELLS

4 M40318 HUB BEARING KIT 6001
 5 99603701 FRONT AXLE QRM ROAD 2008
 6 99603801 SHORT EXPENSIBLE BEARING SUPPORTS > 2008



Freewheel: Shimano/Sram, convertible to Campagnolo with optional driver body	
Freewheel: Shimano/Sram, convertible to Campagnolo with optional driver body	
Front axle: Quick Release only	
Front axle: Quick Release only	
Rear axle: Quick Release only	
Rear axle: Quick Release only	