


ASTM CATEGORY 2 : road and offroad with jumps less than 15cm For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included Recommended tyre sizes: 25 to 32 mm Max. Pressure: 23mm 8.7 bars - 125 psi, 25/28mm 7.7 bars - 110 psi

## **REFERENCES WHEELS**

F73871 Aks18D6B Ft12x100SV F73881 Aks18DCLFt12x100SV



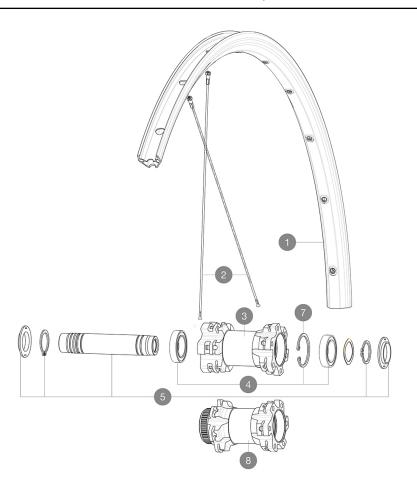

RIMS		OPTIONS	OPTIONS	
:		V2371901	KIT FRONT AXLE MTB L1 QRM AUTO 15x100mm	
		ADAPTERS		
1 V2290815	KIT FRT/REAR RIM AKSIUM ONE DISC/AKSIUM DISC	V000001		
		V2390801	KIT 2 FORK RESTS FRONT AXLE MTB QRM AUTO	
SPOKES		V2680301	"Kit Ft Road Adapter 12 >> 9mm"	
<b>2</b> V2277201	KIT 12 FT 9/12 AKSIUM DISC ALLR 700 SPK 296mm			
HUB SHELLS				
<b>4</b> 99688501	BEARING KIT 9/12/15 D6T HUB 20x32x7 6804			
5 V2371801	KIT FRONT AXLE 12mm L1 + WAVED WASHER + CLIP			

1



# MAVIC Aksium Disc TA

## **DELIVERED WITH**

BR101 quick releases (M40350 frt, M40351 rear road, M40352 rear MTB)	
Rim tape	
User guide	

# **Specifications**

# RIMS

#### • Material : S6000 Aluminum

- •Height: 21 mm
- Joint : pinned
- Drilling : traditional with H2 reinforcement Disc brake specific profile
- Valve hole diameter : 6.5 mm
- Tyre : clincher
- . Internal width : 17 mm
- ETRTO size : 622x17C

# SPOKES

- Material : steel
- Shape : straight pull, round
- Nipples : steel, ABS
- Count : 24 front and rear
- Lacing : front and rear crossed 2

#### WHEEL HUB

- $\mbox{-}\mbox{Front}$  and rear bodies :  $\mbox{aluminum}$
- Axle material : aluminum
- Front bearings : sealed cartridge bearings (QRM), Rear bearings auto adjust sealed cartridge bearings
- (QRM Auto)
- Freewheel : Instant Drive 360

# VERSIONS

- Color : Black only • Disc standard : 6 Bolts or Center Lock(R)

# **COMPATIBILITY**

Freewheel: Shimano/Sram, convertible to Campagnolo and XD-R with optional driver bodies	
Front axle : 12mm thru axle. Optional : Easily convertible to quick release with adequate adapters, convertible to 15mm with complete axle replacement	
Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters (not available in Germany)	

#### WHEEL WEIGHTS

905