




# Ksyrium Elite UST

1  
2018  
FRONT

ASTM CATEGORY 2 : road and offroad with jumps less than 15cm  
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included  
Recommended tyre sizes: 25 to 32 mm  
Max. Pressure tubeless: 25mm 7 bars - 100 PSI, 28mm 6 bars - 87 PSI. Max pressure tubetype: 25/28mm 7,7 bars - 110 PSI

## REFERENCES WHEELS

|        |                          |        |                   |
|--------|--------------------------|--------|-------------------|
| F73481 | KsyEIUSTFt GraphiteBlack | F73482 | KsyEIUSTFt Yellow |
| F73483 | KsyEIUSTFt Red           |        |                   |

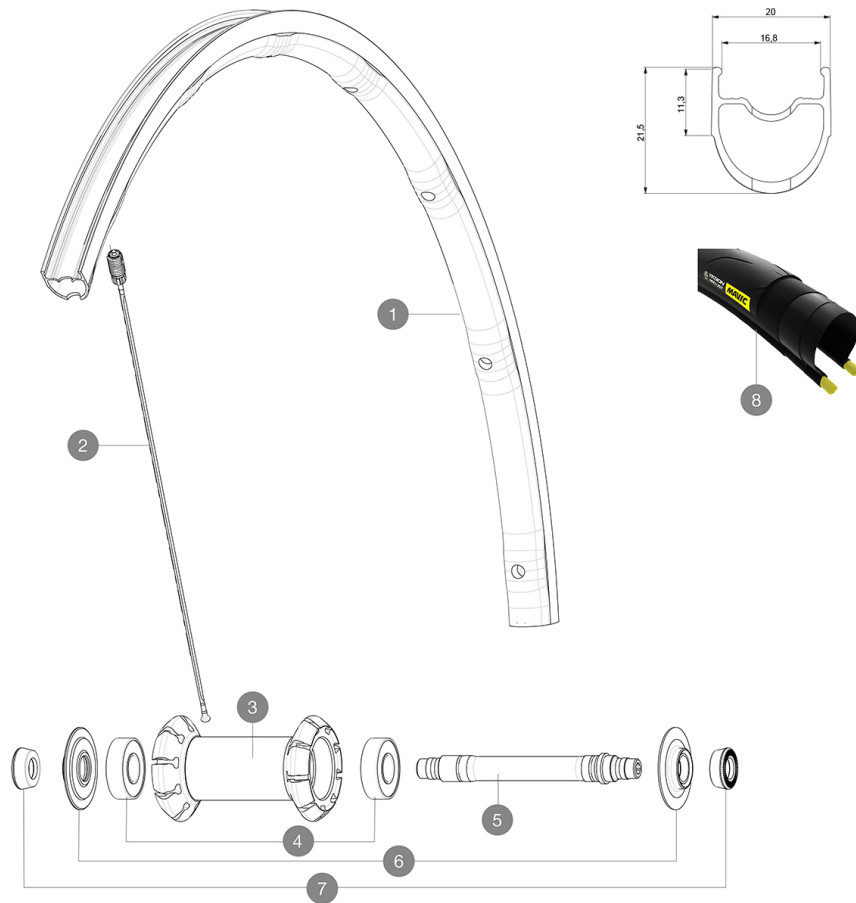

## RIMS



&NBSP;:

|   |          |                                 |
|---|----------|---------------------------------|
| 1 | V2730810 | KIT FRONT RIM KSYRIUM ELITE UST |
|---|----------|---------------------------------|

## SPOKES

|   |          |                                        |
|---|----------|----------------------------------------|
| 2 | V2277801 | KIT 9 FT KSYRIUM ELITE UST SPOKE 286mm |
|---|----------|----------------------------------------|

## HUB SHELLS

|   |          |                                         |
|---|----------|-----------------------------------------|
| 3 | N/A      | HUB BODY                                |
| 3 | N/A      | HUB BODY                                |
| 3 | N/A      | HUB BODY                                |
| 3 | N/A      | HUB BODY                                |
| 4 | M40318   | KIT 2 HUB BEARINGS 6001                 |
| 5 | 30870001 | FRONT AXLE ROAD RIM BRAKING QRM +       |
| 6 | 12038201 | KSYRIUM ELITE HUB CAP AND ADJUSTING NUT |

## TYRES

|   |          |                       |
|---|----------|-----------------------|
| 8 | 39938825 | Yksion Pro UST 700x25 |
|---|----------|-----------------------|

## ADAPTERS

|   |          |                                                         |
|---|----------|---------------------------------------------------------|
| 7 | 35117301 | FT/RR FORK REST R-SYS/CC ULTIMATE > 2013/KSY PRO CARB T |
|---|----------|---------------------------------------------------------|



# Ksyrium Elite UST

2018  
FRONT

## DELIVERED WITH

|                                                           |  |
|-----------------------------------------------------------|--|
| Mavic tyre sealant (rear wheel)<br>(355 466 01)           |  |
| Mavic tyre sealant (rear wheel)<br>(355 466 01)           |  |
| BR301 quick releases<br>(V24 501 01 frt, V24 502 01 rear) |  |
| BR301 quick releases<br>(V24 501 01 frt, V24 502 01 rear) |  |
| Tyre sealant syringe                                      |  |
| Tyre sealant syringe                                      |  |
| UST valve and accessories<br>(129 838 01)                 |  |
| UST valve and accessories<br>(129 838 01)                 |  |
| Multifunction adjustment wrench<br>(325 423 01)           |  |
| Multifunction adjustment wrench<br>(325 423 01)           |  |
| User guide                                                |  |
| User guide                                                |  |

## COMPATIBILITY

|                                                                              |  |
|------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram, convertible to Campagnolo with optional driver body |  |
| Freewheel: Shimano/Sram, convertible to Campagnolo with optional driver body |  |
| Front axle: Quick Release only                                               |  |
| Front axle: Quick Release only                                               |  |
| Rear axle: Quick Release only                                                |  |
| Rear axle: Quick Release only                                                |  |

## Specifications

### RIMS

- **Material** : Maxtal
- **Material** : Maxtal
- **Height** : front 22 mm, rear 25 mm asymmetrical
- **Height** : front 24mm, rear 26 asymmetrical
- **Joint** : SUP
- **Joint** : SUP
- **Drilling** : Fore
- **Drilling** : Fore
- **Brake track** : UB Control
- **Brake track** : UB Control
- **Weight reduction** : ISM 4D
- **Weight reduction** : ISM 4D
- **Valve hole diameter** : 6.5 mm
- **Valve hole diameter** : 6.5 mm
- **Tyre** : clincher
- **Tyre** : clincher
- **Internal width** : 17 mm
- **Internal width** : 17 mm
- **ETRTO size** : 622x17TC ROAD
- **ETRTO size** : 622x17TC ROAD

### SPOKES

- **Material** : steel
- **Material** : steel
- **Shape** : straight pull, flat, double butted

### WHEEL HUB

- **Front and rear bodies** : aluminum
- **Front and rear bodies** : aluminum
- **Axle material** : aluminum
- **Axle material** : aluminum
- Adjustable sealed cartridge bearings (QRM+)
- Adjustable sealed cartridge bearings (QRM+)
- **Freewheel** : FTS-L steel
- **Freewheel** : FTS-L steel

### VERSIONS

- **Color** : Black only

### WHEEL WEIGHTS

665