

ASTM CATEGORY 2 : road and offroad with jumps less than 15cm

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included


Recommended tyre sizes: 25 to 32 mm

Max. Pressure tubeless: 25mm 7 bars - 100 PSI, 28mm 6 bars - 87 PSI. Max pressure tubetype: 25/28mm 7,7 bars - 110 PSI

## REFERENCES WHEELS

R17561 KsyEIUSTRr GraphiteBlack  
R17563 KsyEIUSTRr Red

R17562 KsyEIUSTRr Yellow

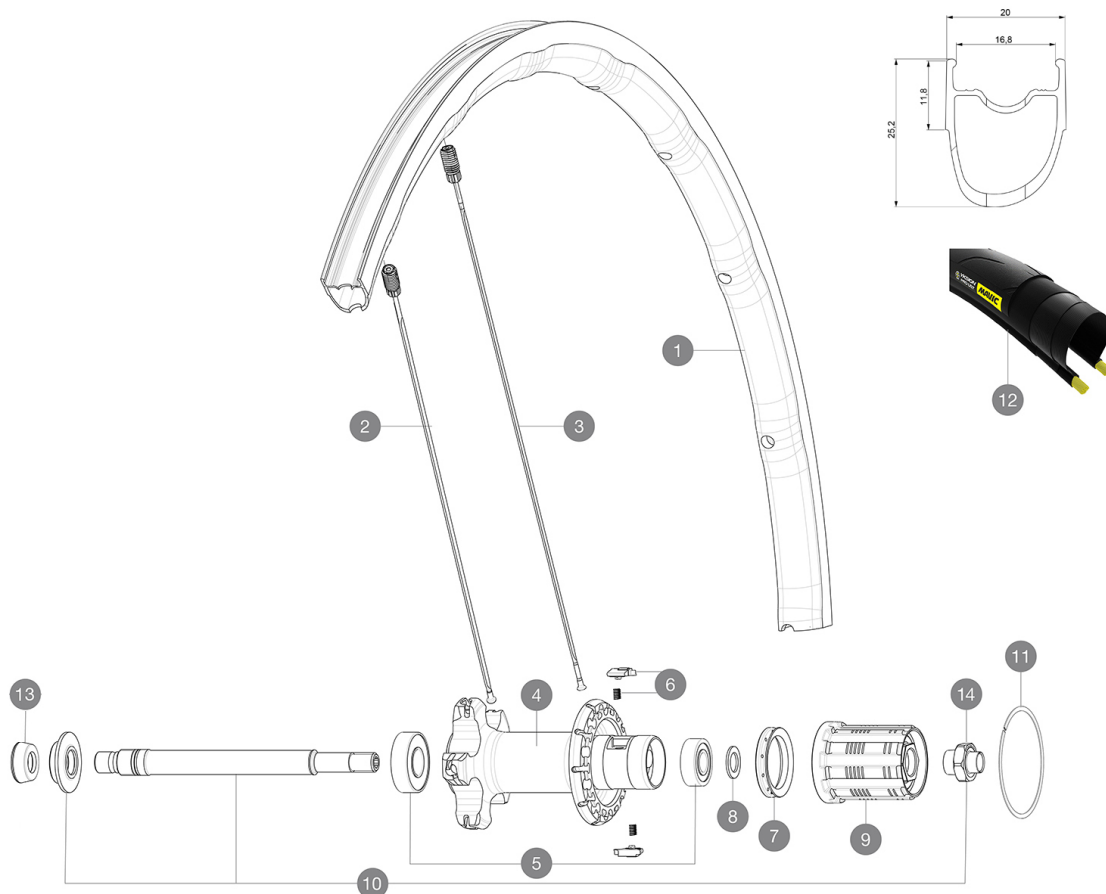

## RIMS



&NBSP;:

1 V2730913 KIT REAR RIM KSYRIUM ELITE UST

## SPOKES

2 V2278001 KIT 10 NDS KSYRIUM ELITE UST LTD SPK 301mm  
3 V2277901 KIT 10 DS KSYRIUM ELITE UST SPOKE 275mm

## HUB SHELLS

4 N/A HUB BODY  
4 N/A HUB BODY  
4 N/A HUB BODY  
4 N/A HUB BODY  
5 V2540101 REAR HUB B9+6001 BEARINGS 2015  
6 M40578 FTSL PAWLS KIT (ROAD WHEELS)  
7 99500001 FTSL/FTSX FREEHUB BODY SEAL  
8 30872801 SET OF 3 INTERNAL SILVER SPACERS 9mm FTS-L  
9 30871101 FTS-L ROAD FREEWHEEL BODY HG11 8/9 compatible  
10 V2250501 KIT REAR AXLE KSYRIUM SLE/SL/ELITE/PRO EXALITH/ALLROAD ELIT  
11 V2252201 KIT 2 REAR HUB RETENTION RINGS 48mm  
14 V2373101 KIT NUT FOR ROAD ALLOY THROUGH AXLE 9mm

## TYRES

12 39938825 Yksion Pro UST 700x25

## ADAPTERS

13 35117301 FT/RR FORK REST R-SYS/CC ULTIMATE > 2013/KSY PRO CARB T

# MAVIC Ksyrium Elite UST

## DELIVERED WITH

|                                                           |  |
|-----------------------------------------------------------|--|
| Mavic tyre sealant (rear wheel)<br>(355 466 01)           |  |
| Mavic tyre sealant (rear wheel)<br>(355 466 01)           |  |
| BR301 quick releases<br>(V24 501 01 frt, V24 502 01 rear) |  |
| BR301 quick releases<br>(V24 501 01 frt, V24 502 01 rear) |  |
| Tyre sealant syringe                                      |  |
| Tyre sealant syringe                                      |  |
| UST valve and accessories<br>(129 838 01)                 |  |
| UST valve and accessories<br>(129 838 01)                 |  |
| Multifunction adjustment wrench<br>(325 423 01)           |  |
| Multifunction adjustment wrench<br>(325 423 01)           |  |
| User guide                                                |  |
| User guide                                                |  |

## COMPATIBILITY

|                                                                              |  |
|------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram, convertible to Campagnolo with optional driver body |  |
| Freewheel: Shimano/Sram, convertible to Campagnolo with optional driver body |  |
| Front axle: Quick Release only                                               |  |
| Front axle: Quick Release only                                               |  |
| Rear axle: Quick Release only                                                |  |
| Rear axle: Quick Release only                                                |  |

## Specifications

### RIMS

- **Material** : Maxtal
- **Material** : Maxtal
- **Height** : front 22 mm, rear 25 mm asymmetrical
- **Height** : front 24mm, rear 26 asymmetrical
- **Joint** : SUP
- **Joint** : SUP
- **Drilling** : Fore
- **Drilling** : Fore
- **Brake track** : UB Control
- **Brake track** : UB Control
- **Weight reduction** : ISM 4D
- **Weight reduction** : ISM 4D
- **Valve hole diameter** : 6.5 mm
- **Valve hole diameter** : 6.5 mm
- **Tyre** : clincher
- **Tyre** : clincher
- **Internal width** : 17 mm
- **Internal width** : 17 mm
- **ETRTO size** : 622x17TC ROAD
- **ETRTO size** : 622x17TC ROAD

### SPOKES

- **Material** : steel
- **Material** : steel
- **Shape** : straight pull, flat, double butted

### WHEEL HUB

- **Front and rear bodies** : aluminum
- **Front and rear bodies** : aluminum
- **Axle material** : aluminum
- **Axle material** : aluminum
- Adjustable sealed cartridge bearings (QRM+)
- Adjustable sealed cartridge bearings (QRM+)
- **Freewheel** : FTS-L steel
- **Freewheel** : FTS-L steel

### VERSIONS

- **Color** : Black only

### WHEEL WEIGHTS

855