

ASTM CATEGORY 1 : road only

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included

Recommended tyre sizes: 25 to 32 mm


Max. Pressure tubeless: 25mm 6 bars - 87 PSI, 28mm 5 bars - 70 PSI. Max pressure tubetype: 25mm 7 bars - 102 PSI

## REFERENCES WHEELS

P84801 KsyProCarSLUSTDCLPr12mm

R18961 KsyProCarSLUSTDCLRr12x142

R18951 KsyProCarSLUSTD6BRr12x142

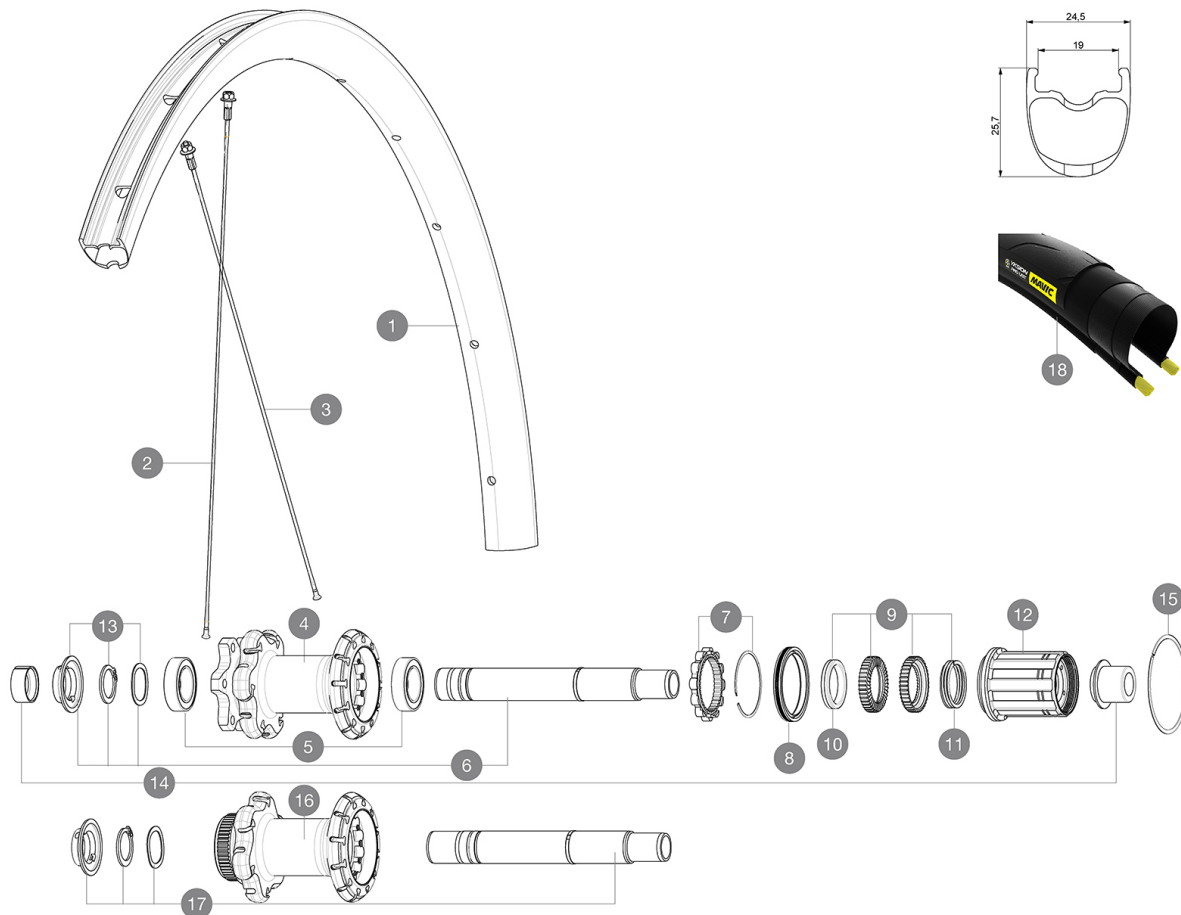

## RIMS



&NBSP;:

|   |          |                                             |
|---|----------|---------------------------------------------|
| 1 | V2733713 | KIT REAR RIM KSYRIUM PRO CARBON SL UST DISC |
|   | V2620101 | UST RIM TAPE 25mm (for 21-24mm wide rim)    |

## SPOKES

|   |          |                                                              |
|---|----------|--------------------------------------------------------------|
| 2 | V3661201 | KIT 12 FR/NDS KSYPROCARB SL UST D/RB 291mm SPK+ALU NIPP - wh |
| 2 | V3663301 | KIT 12 FRT KSYR PRO CARB SL UST Disc + NDS KSYR PRO CARB SL  |
| 2 | V3661101 | KIT 1 FT/RR NDS 291mm KPC SL UST DISC SPK + ALU NIPPLES      |
| 3 | V3663201 | KIT 12 DS KSY PRO CARB SL UST/UST Disc/C Disc/T Disc BUTTED  |
| 3 | V3661301 | KIT 12 DS KSY PRO CARB SL UST D 273mm SPK + ALU NIPPLES      |

## HUB SHELLS

|    |          |                                                       |
|----|----------|-------------------------------------------------------|
| 4  | N/A      | HUB BODY                                              |
| 5  | V2560401 | KIT 2 BEARINGS 17x28x7 + WAVED WASHER + CLIP          |
| 6  | V2252901 | KIT ID360 CENTER LOCK 135/142mm AXLE W/CLIP           |
| 7  | V2252701 | KIT ID360 INSERT SHAPED EAR LOBE > 2017               |
| 8  | V2251601 | KIT ID360 SEAL + GREASE                               |
| 9  | V2251701 | KIT ID360 2 RATCHETS + SPRING + GREASE                |
| 10 | V2500501 | KIT ID360 3 PADS NOISE REDUCING                       |
| 11 | V2251801 | KIT 3 ID360 ROAD SPRINGS                              |
| 12 | V3430101 | HG11 Freewheel Body ID360                             |
| 13 | V2560501 | KIT ADJUST. SYSTEM QRM AUTO ID360 for 17x28x7 bearing |

|    |          |                                               |
|----|----------|-----------------------------------------------|
| 15 | V2252201 | KIT 2 REAR HUB RETENTION RINGS 48mm           |
| 16 | N/A      | HUB BODY                                      |
| 17 | V2253001 | KIT ID360 6 BOLTS 135/142mm AXLE WITH CIRCLIP |

## TYRES

|    |          |                       |
|----|----------|-----------------------|
| 18 | 39938825 | Yksion Pro UST 700x25 |
|----|----------|-----------------------|

## ADAPTERS

|    |          |                                |
|----|----------|--------------------------------|
| 14 | V2510701 | ID360V2RrAxleAdapt12x142/148   |
|    | V2510901 | ID360 EVO RrAxleAdpt12x135/150 |
|    | V2510801 | ID360 V2 RrAxleAdapt9x135      |



# Ksyrium Pro Carbon SL UST Disc

2018  
REAR

DELIVERED WITH

|                                                 |  |
|-------------------------------------------------|--|
| Mavic tyre sealant (rear wheel)<br>(355 466 01) |  |
| Tyre sealant syringe                            |  |
| UST valve and accessories<br>(129 838 01)       |  |
| Specific disc bolts<br>(308 719 01)             |  |
| Tubeless rim tape                               |  |
| Multifunction adjustment wrench<br>(325 423 01) |  |
| User guide                                      |  |

COMPATIBILITY

|                                                                                                                                                      |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram, convertible to Campagnolo and XD-R with optional driver bodies                                                              |  |
| Front axle: 12mm thru axle. Optional: Easily convertible to quick release with adequate adapters, convertible to 15mm with complete axle replacement |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters (not available in Germany)                                            |  |

Specifications

RIMS

- Material : 3K carbon fibers
  - Height : 25mm
  - Drilling : traditional
- Disc brake specific profile
- Valve hole diameter : 6.5 mm
  - Tyre : UST Tubeless and tubetype
  - Internal width : 19 mm
  - ETRTO size : 622x19TC Road

SPOKES

- Material : steel
- Shape : straight pull, aero, double butted
- Nipples : aluminum, ABS
- Count : 24 front and rear
- Lacing : front crossed 2, rear Isopulse

WHEEL HUB

- Front and rear bodies : aluminum
- Axle material : aluminum
- Front bearings : adjustable sealed cartridge bearings (QRM+), Rear bearings auto adjust sealed cartridge bearings (QRM Auto)
- Freewheel : Instant Drive 360

VERSIONS

- Color : Black only
- Disc standard : 6 Bolts or Center Lock(R)

WHEEL WEIGHTS

805