



ASTM CATEGORY 3 : offroad with jumps less than 61cm
 Recommended tyre sizes: 36 mm to 64 mm (1.4" to 2.5")

参照ホイール

F80261	Xmx Light 27,5 Ft	F80271	Xmx Light 27,5 Ft Bst
--------	-------------------	--------	-----------------------

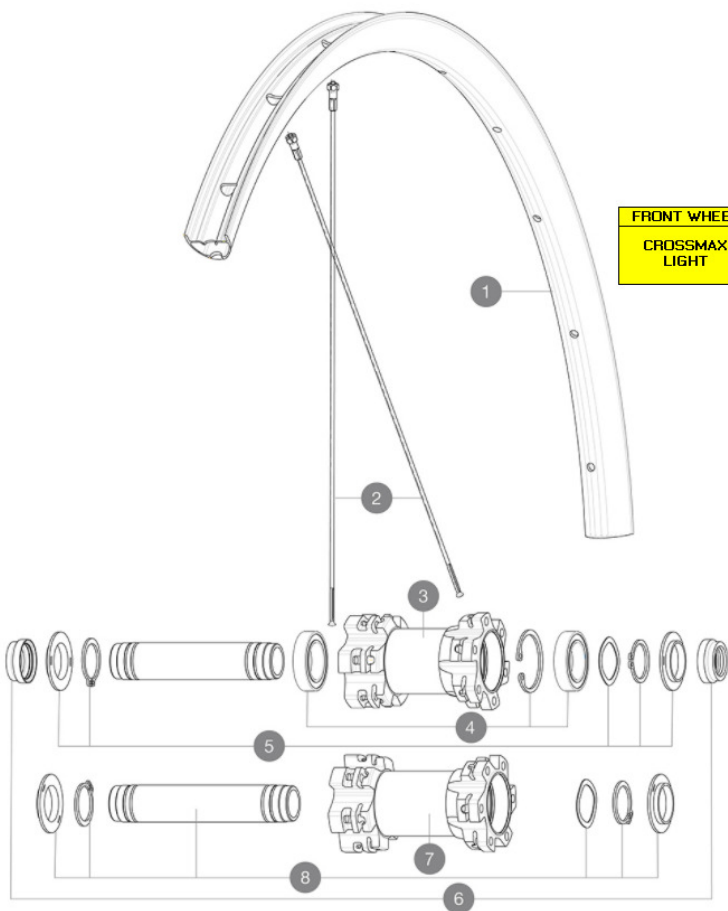

FRONT WHEEL	N°	PARTS	REFERENCE	REFERENCE BOOST
CROSSMAX LIGHT	3 BIS / 7 BIS	HUB BODY	N/A	N/A
	5 BIS / 8 BIS	AXLE	V2372301	V2372401
	6 BIS	ADAPTORS	V2372501	

RIMS



&NBSP;:

1	V2318015	KIT FRONT/REAR RIM CROSSMAX LIGHT 27,5" 22TSS
	V2620101	UST RIM TAPE 25mm (for 21-24mm wide rim)

SPOKES

2	V2385301	KIT 12 FT/ND5 CROSSMAX LIGHT 27,5" SPK 278mm
---	----------	--

HUB SHELLS

3	N/A	HUB BODY
	N/A	HUB BODY
4	99688501	BEARING KIT 9/15 D6T HUB
5	V2371901	KIT FRONT AXLE MTB L1 QRM AUTO 15x100mm
	V2372301	KIT 100mm AXLE QRM AUTO MTB > 2019
7	N/A	HUB BODY
	N/A	HUB BODY
8	V2372001	KIT FRONT AXLE MTB L1 QRM AUTO BOOST 15x110mm
	V2372401	KIT 110mm AXLE QRM AUTO MTB > 2019

ADAPTERS

6	V2390801	KIT 2 FORK RESTS FRONT AXLE MTB QRM AUTO
	V2372501	15mm MTB Axle Cap QRM Auto From 2019



Crossmax Light

付属品

UST (129 838 01)	

COMPATIBILITY

Freewheel: Shimano/Sram or XD	
15mm thru axle, convertible to Quick Release with optional adapters	

Specifications

リム

• S6000
• SUP
• : 6.5 mm
UST
22 mm
• ETRTO size 27.5" : 584x22ss
• ETRTO size 29" : 622x22ss

スポーク

24
2

ホイールハブ

QRM Auto
QRM
TS-2

VERSIONS

6
110
148
0A
135/142

ホイールの重み

Weight Front 27.5": 785
Weight Front 29": 825