


MAVIC Crossmax

ASTM CATEGORY 3 : offroad with jumps less than 61cm

Recommended tyre sizes: 36 mm to 64 mm (1.4" to 2.5")

参照ホイール

R17931	Xmx27,5RrBst	R22481	Xmx 27,5 Rr Bst XD
R22471	Xmx 27,5 Rr XD	R17321	Xmx27,5Rr

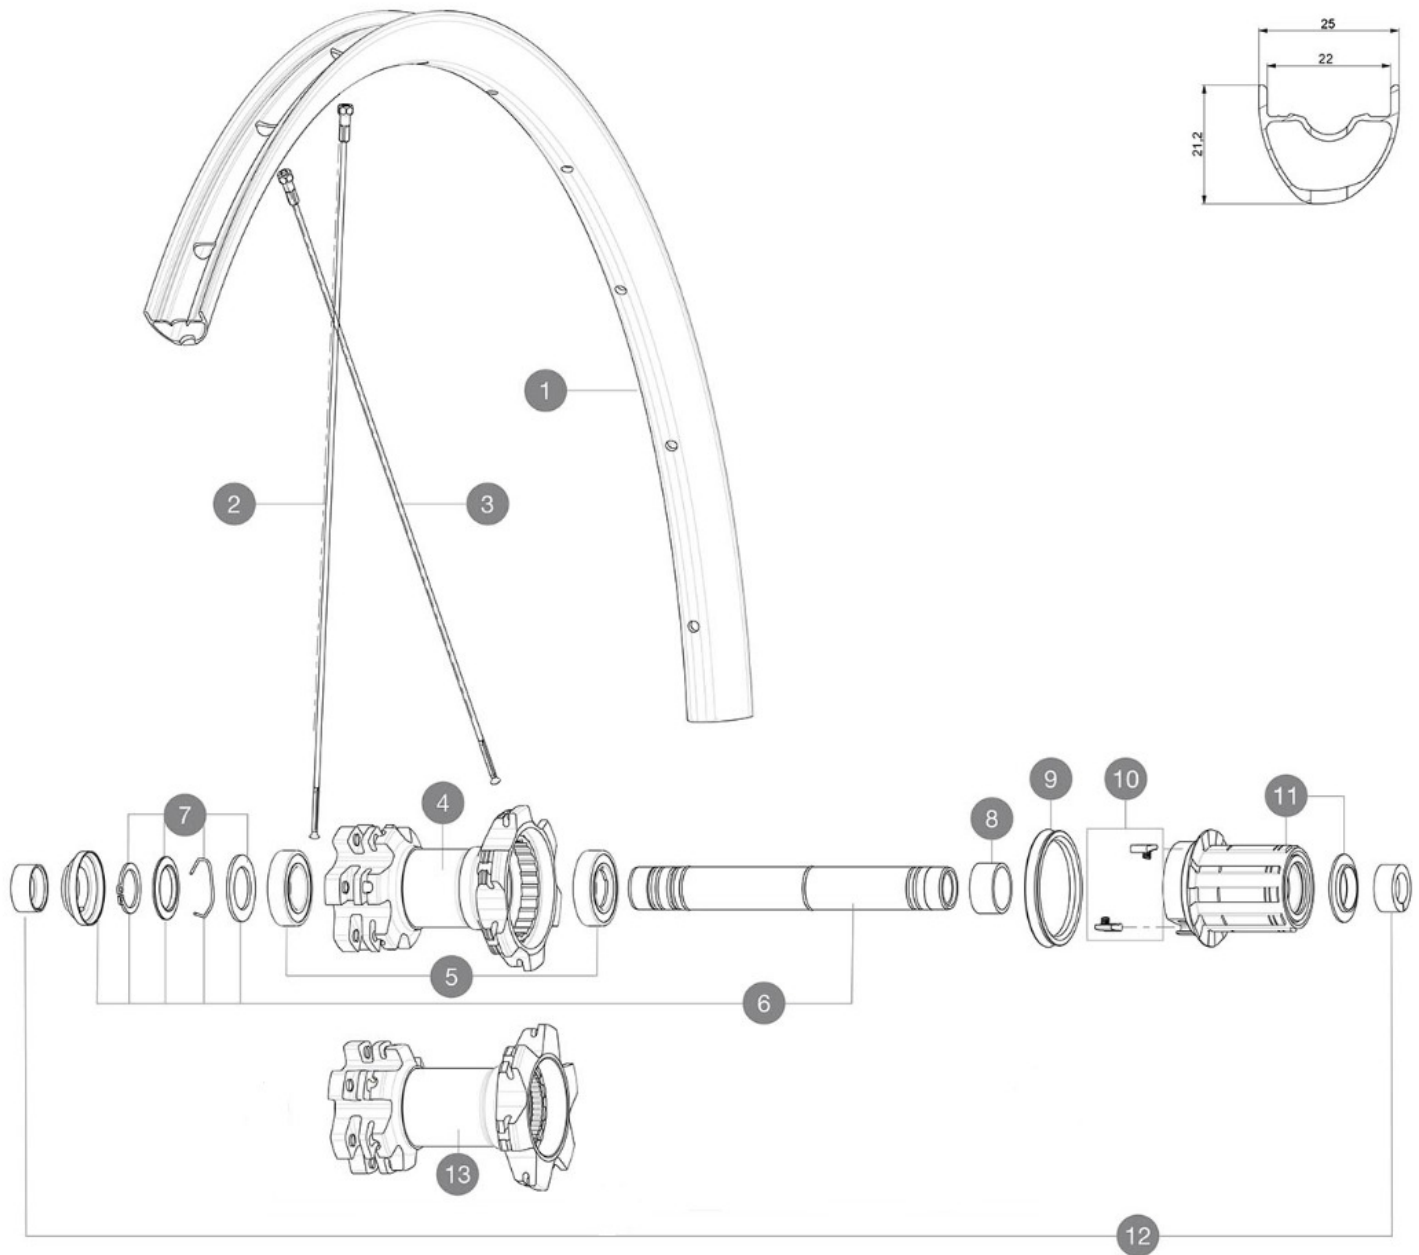

RIMS



&NBSP;:

1	V2317815 V2620101	KIT FRONT/REAR RIM CROSSMAX 27,5" 22TSS UST RIM TAPE 25mm (for 21-24mm wide rim)
---	----------------------	---

SPOKES

2	V2385301	KIT 12 FT/NDS CROSSMAX LIGHT 27,5" SPK 278mm
3	V2385101	KIT 12 DS CROSSMAX LIGHT 27,5" SPK 275mm

HUB SHELLS

4	N/A	HUB BODY
5	M40076	HUB BEARINGS 17x30x7 6903 x 2
6	V2371201	KIT REAR QRM AXLE 135-142 / BOOST 148mm

7	V2370401	REAR AUTO ADJUST.PLAY KIT 12MM AXLE
8	35124501	SET OF 3 REAR AXLE/FREEWHEEL BODY SPACERS
9	99610701	ITS4 SEAL
10	99610601	ITS4 PAWLS KIT
11	35126301	TS-2 FREEWHEEL BODY + SEAL 2013 (NO PAWLS) - while stock las
13	N/A	HUB BODY

ADAPTERS

12	32965001	ADAPTER Rr 12x142mm Elite/CRide MTB (Rd)
----	----------	--



Crossmax

付属品

UST (129 838 01)	

COMPATIBILITY

Freewheel: Shimano/Sram or XD	
15mm thru axle, convertible to Quick Release with optional adapters	

Specifications

リム

- S6000
- SUP
- 6.5 mm
- UST
- 22 mm
- ETRTO size 27.5" : 584x22ss
- ETRTO size 29" : 622x22ss

スポーク

- 110
- 148
- 100

ホイールハブ

- TS-2

VERSIONS

- 6A
- 110
- 148
- 100

ホイールの重み

- Weight Rear 27.5": 925
- Weight Rear 29": 960