


ASTM CATEGORY 3 : CROSS COUNTRY AND TRAIL RIDING  
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included

## REFERENCES WHEELS

|        |            |        |                    |
|--------|------------|--------|--------------------|
| F73291 | Xmx29Ft    | P86381 | Crossmax 29 Pr Bst |
| F73741 | Xmx29FtBst | P86601 | Crossmax29PrBstXD  |

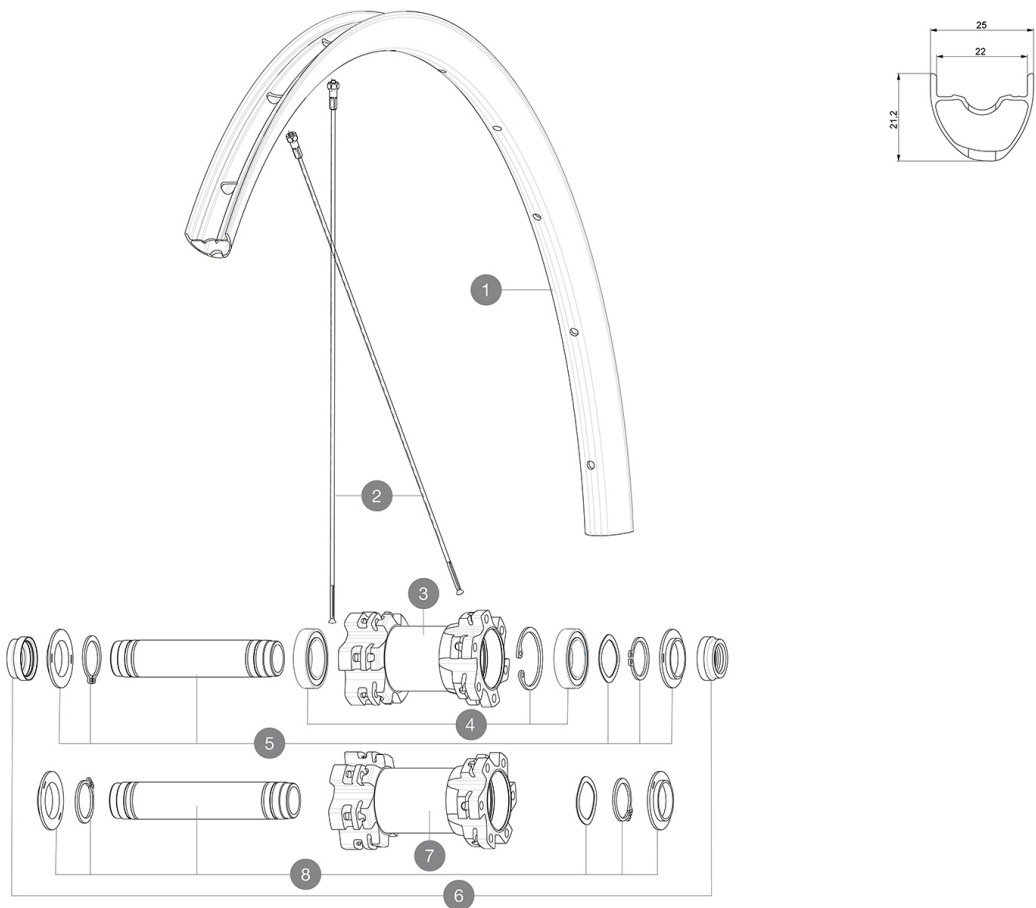

## RIMS



&NBSP;:

|   |                      |                                                                                   |
|---|----------------------|-----------------------------------------------------------------------------------|
| 1 | V2317915<br>V2620101 | KIT FRONT/REAR RIM CROSSMAX 29" 22TSS<br>UST RIM TAPE 25mm (for 21-24mm wide rim) |
|---|----------------------|-----------------------------------------------------------------------------------|

## SPOKES

|   |          |                                                             |
|---|----------|-------------------------------------------------------------|
| 2 | 36690301 | "KIT 12 FT/NDS XONE/XMAX - XA 29"/AKSIUM DISC 9 + 12 FT/AKS |
|---|----------|-------------------------------------------------------------|

## HUB SHELLS

|   |          |                                               |
|---|----------|-----------------------------------------------|
| 3 | N/A      | HUB BODY                                      |
| 4 | 99688501 | BEARING KIT 9/12/15 D6T HUB 20x32x7 6804      |
| 5 | V2371901 | KIT FRONT AXLE MTB L1 QRM AUTO 15x100mm       |
| 7 | N/A      | HUB BODY                                      |
| 8 | V2372001 | KIT FRONT AXLE MTB L1 QRM AUTO BOOST 15x110mm |

## ADAPTERS

|   |                      |                                                                     |
|---|----------------------|---------------------------------------------------------------------|
| 6 | V2390801<br>99694101 | KIT 2 FORK RESTS FRONT AXLE MTB QRM AUTO<br>ADAPTER Ft 15 to 9mm QR |
|---|----------------------|---------------------------------------------------------------------|



# Crossmax 29

### DELIVERED WITH

|                                           |  |
|-------------------------------------------|--|
| UST valve and accessories<br>(129 838 01) |  |
| Tubeless rim tape                         |  |
| User guide                                |  |

### COMPATIBILITY

|                                                                                     |  |
|-------------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram or XD                                                       |  |
| Front axle: convertible from 15mm thru axle to Quick Release with optional adapters |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters      |  |

### Specifications

#### RIMS

- **Material** : S6106 alloy
  - **Joint** : SUP
  - **Drilling** : traditional
  - **Valve hole diameter** : 6.5 mm
  - **Tyre** : UST Tubeless and tubetype
  - **Internal width** : 22 mm
  - **ETRTO size 27.5"** : 584x22TSS
  - **ETRTO size 29"** : 622x22TSS
- Use with Mavic Tubeless Tape

#### SPOKES

- **Material** : steel
- **Shape** : straight pull, round
- **Count** : 24 front and rear
- **Lacing** : front and rear crossed 2

#### WHEEL HUB

- **Front and rear bodies** : aluminum
- **Axle material** : aluminum
- **Front bearings** : auto adjust sealed cartridge bearings (QRM Auto), Rear bearings sealed cartridge bearings (QRM)
- **Freewheel** : TS-2 alloy

#### VERSIONS

- **Color** : Black only
- **Disc standard** : 6 Bolts only
- **Hub width** : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)

#### WHEEL WEIGHTS