


ASTM CATEGORY 3 : CROSS COUNTRY AND TRAIL RIDING  
 For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included  
 Recommended tyre sizes: 46mm to 64mm (1.8" to 2.5")

### REFERENCES WHEELS

|        |                         |        |                       |
|--------|-------------------------|--------|-----------------------|
| F80311 | Xa Pro 27,5 Ft Bst      | P86611 | XA Pro 27,5 Pr XD     |
| F80511 | Xa Pro 27,5 Ft Lefty 60 | P86621 | XA Pro 27,5 Pr Bst XD |
| P86191 | XA Pro 27,5 Pr          | F80301 | Xa Pro 27,5 Ft        |
| P86351 | XA Pro 27,5 Pr Bst      |        |                       |

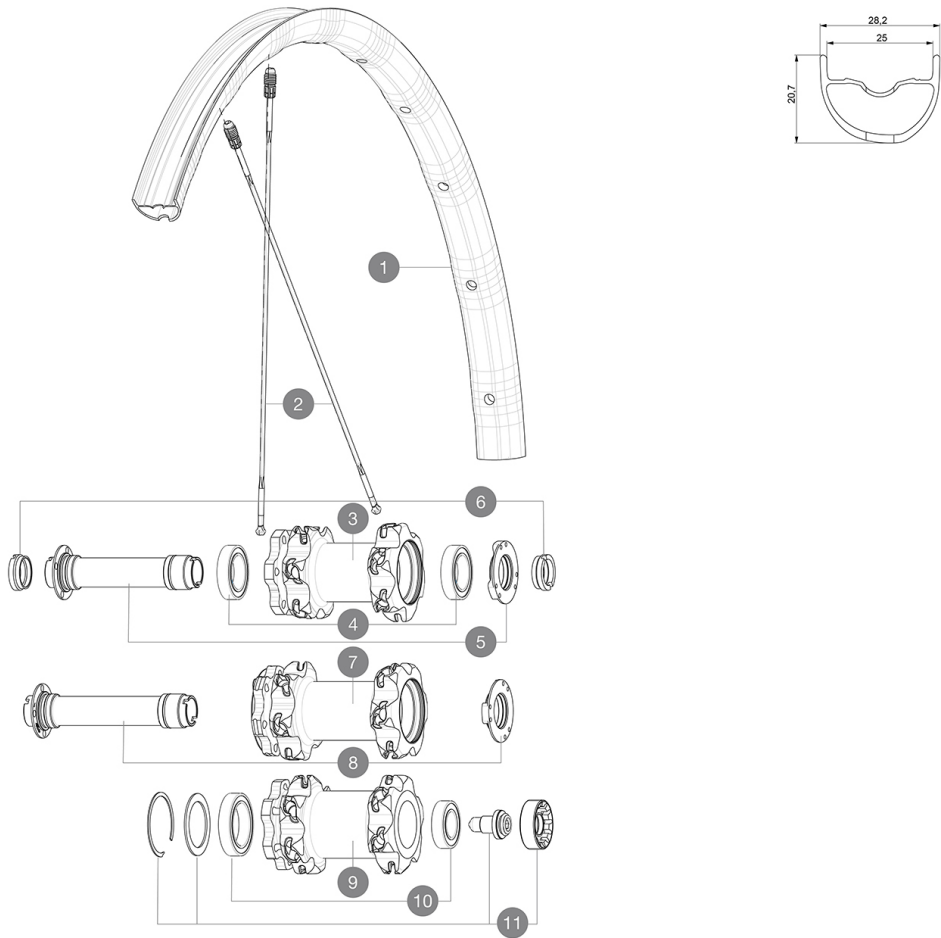

### RIMS



|   |          |                            |
|---|----------|----------------------------|
| 1 | V2318410 | KIT FRONT RIM XA PRO 27,5" |
|---|----------|----------------------------|

### SPOKES

|   |          |                                                            |
|---|----------|------------------------------------------------------------|
| 2 | V2384701 | KIT 12 FT/NDS CROSSMAX PRO 27,5" SPK 275mm                 |
| 2 | V2385501 | KIT 1 FT/RR XA PRO 27,5" BUTT ALU SPOK 275mm - while stock |

### HUB SHELLS

|    |          |                                           |
|----|----------|-------------------------------------------|
| 3  | N/A      | HUB BODY                                  |
| 4  | 99688501 | BEARING KIT 9/12/15 D6T HUB 20x32x7 6804  |
| 5  | V2252301 | KIT MY16 FRONT AXLE ROAD DISC 9/12/15 INT |
| 7  | N/A      | HUB BODY                                  |
| 8  | V2370701 | KIT FRONT QRM+ AXLE BOOST INTL 110mm      |
| 9  | N/A      | HUB BODY                                  |
| 10 | M40771   | BEARING KIT FOR LEFTY 50 & 60 HUB         |
| 11 | 36709301 | ASSEMBLY KIT FOR LEFTY SUPERMAX WHEELS    |

### OPTIONS

|          |                                          |
|----------|------------------------------------------|
| V2650201 | ADAPTER Front Torque Cap 15x31 MTB QRM + |
|----------|------------------------------------------|

### ADAPTERS

|   |          |                        |
|---|----------|------------------------|
| 6 | B4104401 | ADAPTER Ft 15mm QRM+   |
|   | B4104301 | ADAPTER Ft 9mm QR QRM+ |



# XA Pro

DELIVERED WITH

|                                                 |  |
|-------------------------------------------------|--|
| UST valve and accessories<br>(129 838 01)       |  |
| Multifunction adjustment wrench<br>(325 423 01) |  |
| User guide                                      |  |

COMPATIBILITY

|                                                                                     |  |
|-------------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram or XD                                                       |  |
| Front axle: convertible from 15mm thru axle to Quick Release with optional adapters |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters      |  |

Specifications

RIMS

- **Material** : Mxstal
- **Joint** : SUP
- **Drilling** : Fore
- **Weight reduction** : ISM 4D
- **Valve hole diameter** : 6.5 mm
- **Tyre** : UST Tubeless and tubetype
- **Internal width** : 25 mm
- **ETRTO size 27.5"** : 584x25TSS
- **ETRTO size 29"** : 622x25TSS

Hookless profile

SPOKES

- **Material** : Zicral
- **Shape** : straight pull, bladed, front double butted
- **Nipples** : Fore integrated aluminum
- **Count** : 24 front and rear
- **Lacing** : front crossed 2, rear Isopulse
- **Lacing** : front and rear crossed 2

WHEEL HUB

- **Front and rear bodies** : aluminum
  - **Axle material** : aluminum
- Adjustable sealed cartridge bearings (QRM+)
- **Freewheel** : ITS-4 alloy

VERSIONS

- **Color** : Black only
  - **Disc standard** : 6 Bolts only
  - **Hub width** : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)
- Lefty Supermax

WHEEL WEIGHTS

Weight Front 27.5": 745  
Weight Front 29": 785