


ASTM CATEGORY 3 : offroad with jumps less than 61cm

120
 Recommended tyre sizes: 46 to 64 mm (1.8" to 2.5")

参照ホイール

P86191	XA Pro 27,5 Pr	R22191	Xa Pro 27,5 Bst Rr
P86351	XA Pro 27,5 Pr Bst	R22521	Xa Pro 27,5 Rr XD
P86611	XA Pro 27,5 Pr XD	R22531	Xa Pro 27,5 Rr Bst XD
P86621	XA Pro 27,5 Pr Bst XD	R22181	Xa Pro 27,5 Rr

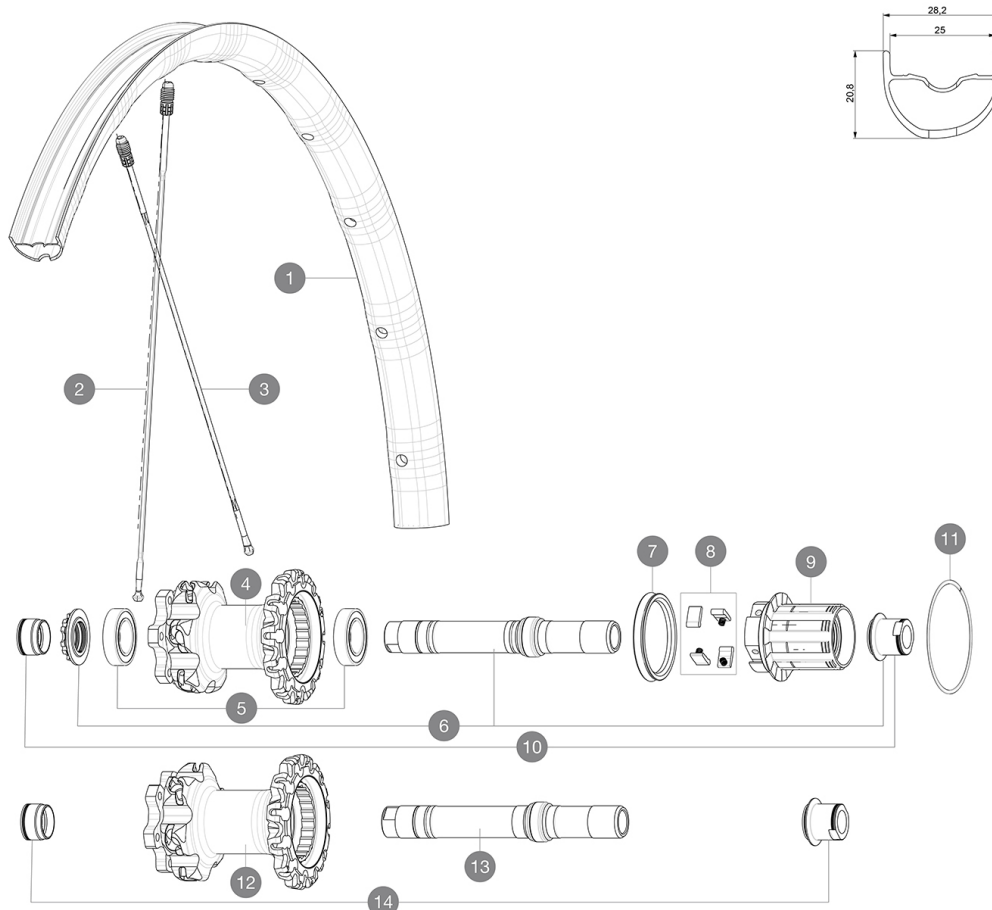

RIMS



&NBSP;:

1	V2318613	KIT REAR RIM XA PRO 27,5"
---	----------	---------------------------

SPOKES

2	V2385501	KIT 1 FT/RR XA PRO 27,5" BUTT ALU SPOK 275mm - while stock
2	V2384701	KIT 12 FRONT + 1 REAR NON-DRIVE SIDE BUTTED ZICRAL SPOKES
3	36675101	20 SPOKES DRIVE SIDE CROSSMAX SLR/ENDURO 650b/27,5" 251,5mm

HUB SHELLS

4	N/A	HUB BODY
5	M40076	HUB BEARINGS 17x30x7 6903 x 2
6	30870401	REAR AXLE KIT ITS4 135mm D6T/DCL 2012
7	99610701	ITS4 SEAL
8	99610601	ITS4 PAWLS KIT
9	35126001	ITS-4 FREEWHEEL BODY + SEAL 2013 (WITHOUT PAWLS)
11	30871801	ELASTIC RING 56mm diam.
12	N/A	HUB BODY
13	V2370801	KIT REAR QRM+ AXLE BOOST ITS-4 148mm

ADAPTERS

10	30859301	AXLE ADAPTER Rr 12x142/148mm Pro Carb MTB (Grey)
	30873101	2 REAR REDUCERS 12/9,5mm 2012 ITS4 HUB
	30872201	FORK REST ITS-4 135mm REAR AXLE > 2012



COMPATIBILITY

USTÄÄÄÄÄÄÄÄÄÄÄÄ (129 838 01)	
ÄÄÄÄÄÄÄÄÄÄÄÄ (325 423 01)	
ÄÄÄÄÄÄÄÄÄÄÄÄ	

Freewheel: Shimano/Sram or XD	
15mm thru axle, convertible to Quick Release with optional adapters	

リム

- $\hat{A}_i \hat{A}_j \hat{A}_k \hat{A}_l \hat{A}_m \hat{A}_n \hat{A}_o$
 • $\hat{A}_i \hat{A}_j \hat{A}_k \hat{A}_l \hat{A}_m \hat{A}_n$: SUP
 $\hat{A}_i \hat{A}_j \hat{A}_k \hat{A}_l \hat{A}_m \hat{A}_n \hat{A}_o \hat{A}_p \hat{A}_q \hat{A}_r \hat{A}_s$
 $\hat{A}_i \hat{A}_j \hat{A}_k \hat{A}_l \hat{A}_m \hat{A}_n \hat{A}_o \hat{A}_p \hat{A}_q \hat{A}_r$
 $\hat{A}_i \hat{A}_j \hat{A}_k \hat{A}_l \hat{A}_m \hat{A}_n \hat{A}_o \hat{A}_p \hat{A}_q$
 $\hat{A}_i \hat{A}_j \hat{A}_k \hat{A}_l \hat{A}_m \hat{A}_n \hat{A}_o \hat{A}_p$
 $\hat{A}_i \hat{A}_j \hat{A}_k \hat{A}_l \hat{A}_m \hat{A}_n \hat{A}_o$
 $\hat{A}_i \hat{A}_j \hat{A}_k \hat{A}_l \hat{A}_m \hat{A}_n$
 $\hat{A}_i \hat{A}_j \hat{A}_k \hat{A}_l \hat{A}_m$
 $\hat{A}_i \hat{A}_j \hat{A}_k \hat{A}_l$
 $\hat{A}_i \hat{A}_j \hat{A}_k$
 $\hat{A}_i \hat{A}_j$
 $\hat{A}_i$
 • ETRTO size 27.5": 584x25ss
 • ETRTO size 29": 622x25ss
 $\hat{A}_i \hat{A}_j \hat{A}_k \hat{A}_l \hat{A}_m \hat{A}_n \hat{A}_o \hat{A}_p \hat{A}_q \hat{A}_r \hat{A}_s \hat{A}_t \hat{A}_u \hat{A}_v \hat{A}_w \hat{A}_x \hat{A}_y \hat{A}_z$

スポーク

- [illegible]

ホイールハブ

- Adjustable sealed cartridge bearings

VERSIONS

- $\hat{A}_1\hat{A}_2\hat{A}_3\hat{A}_4\hat{A}_5\hat{A}_6\hat{A}_7\hat{A}_8\hat{A}_9\hat{A}_{10}\hat{A}_{11}\hat{A}_{12}$
 $\hat{A}_1\hat{A}_2\hat{A}_3\hat{A}_4\hat{A}_5\hat{A}_6\hat{A}_7\hat{A}_8\hat{A}_9\hat{A}_{10}\hat{A}_{11}\hat{A}_{12}6\hat{A}_1\hat{A}_2\hat{A}_3\hat{A}_4\hat{A}_5\hat{A}_6$
 $\hat{A}_1\hat{A}_2\hat{A}_3$
 $\hat{A}_1\hat{A}_2\hat{A}_3\hat{A}_4\hat{A}_5\hat{A}_6\hat{A}_7\hat{A}_8\hat{A}_9\hat{A}_{10}\hat{A}_{11}\hat{A}_{12}110\hat{A}_1\hat{A}_2\hat{A}_3\hat{A}_4\hat{A}_5\hat{A}_6$
 $148\hat{A}_1\hat{A}_2\hat{A}_3\hat{A}_4\hat{A}_5\hat{A}_6\hat{A}_7\hat{A}_8\hat{A}_9\hat{A}_{10}\hat{A}_{11}\hat{A}_{12}\hat{A}_1\hat{A}_2\hat{A}_3\hat{A}_4\hat{A}_5\hat{A}_6\hat{A}_7\hat{A}_8\hat{A}_9\hat{A}_{10}$
 $0\hat{A}_1\hat{A}_2\hat{A}_3135/142\hat{A}_1$
 $\hat{A}_1\hat{A}_2\hat{A}_3\hat{A}_4\hat{A}_5\hat{A}_6\hat{A}_7\hat{A}_8\hat{A}_9\hat{A}_{10}\hat{A}_{11}\hat{A}_{12}\hat{A}_1\hat{A}_2\hat{A}_3\hat{A}_4\hat{A}_5\hat{A}_6\hat{A}_7\hat{A}_8\hat{A}_9\hat{A}_{10}$

ホイールの重み

- Weight Rear 27.5": 865
Weight Rear 29": 905