


ASTM CATEGORY 3 : offroad with jumps less than 61cm
 120
 Recommended tyre sizes: 46 to 64 mm (1.8" to 2.5")

参照ホイール

F80321	Xa Pro 29 Ft	F80521	Xa Pro 29 Ft Lefty 60
F80331	Xa Pro 29 Ft Bst		

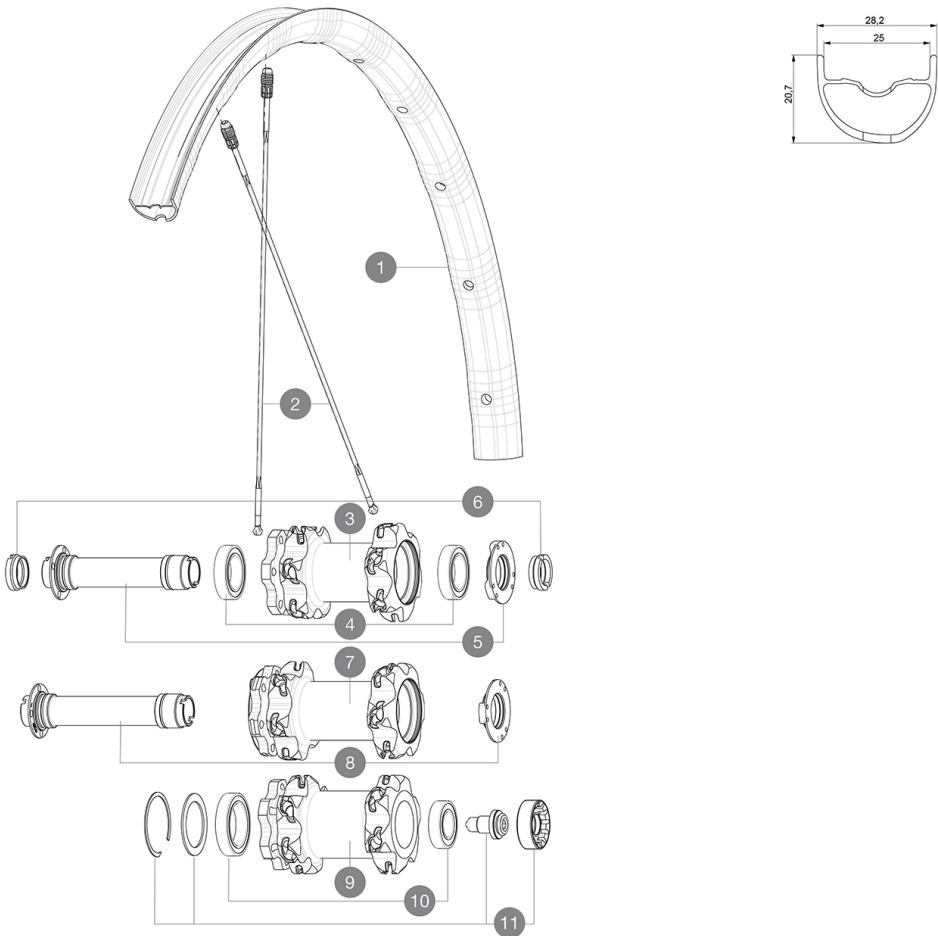

RIMS



1	V2318510	KIT FRONT RIM XA PRO 29"
---	----------	--------------------------

SPOKES

2	V2385601	KIT 1 FT/RR XA PRO 29" BUTTED ALU SPOK 293mm - while stock
2	V2384801	KIT 12 FRONT + 1 REAR NON-DRIVE SIDE BUTTED ZICRAL SPOKES 29

HUB SHELLS

3	N/A	HUB BODY
4	99688501	BEARING KIT 9/15 D6T HUB
5	V2252301	MY16 FRONT AXLE ROAD DISC 9/12/15 INT
7	N/A	HUB BODY
8	V2370701	KIT FRONT QRM+ AXLE BOOST INTL 110mm
9	N/A	HUB BODY
10	M40771	BEARING KIT FOR LEFTY HUB
11	36709301	ASSEMBLY KIT CROSSROC SUPERMAX

OPTIONS

V2650201	ADAPTER Front Torque Cap 15x31 MTB QRM +
----------	--

ADAPTERS

6	B4104401	15mm FT Road Axle Adapters 16
	B4104301	9mm FT road Axle Adapters 16



XA Pro 29

付属品

UST (129 838 01)	

COMPATIBILITY

Freewheel: Shimano/Sram or XD	
15mm thru axle, convertible to Quick Release with optional adapters	

Specifications

リム

- SUP
- 6.5 mm
- UST
- 25 mm
- 584x25ss
- 622x25ss

スポーク

- 24
- 2A

ホイールハブ

- Sealed cartridge bearings
- ITS-4

VERSIONS

- 6A
- 110
- 148
- 135/142

ホイールの重み