


ASTM CATEGORY 3 : offroad with jumps less than 61cm

Recommended tyre sizes: 46 to 64 mm (1.8" to 2.5")

参照ホイール

R17381	Xa29Rr	R22681	Xa 29 Rr XD
R18031	Xa29RrBst	R22691	Xa 29 Rr Bst XD

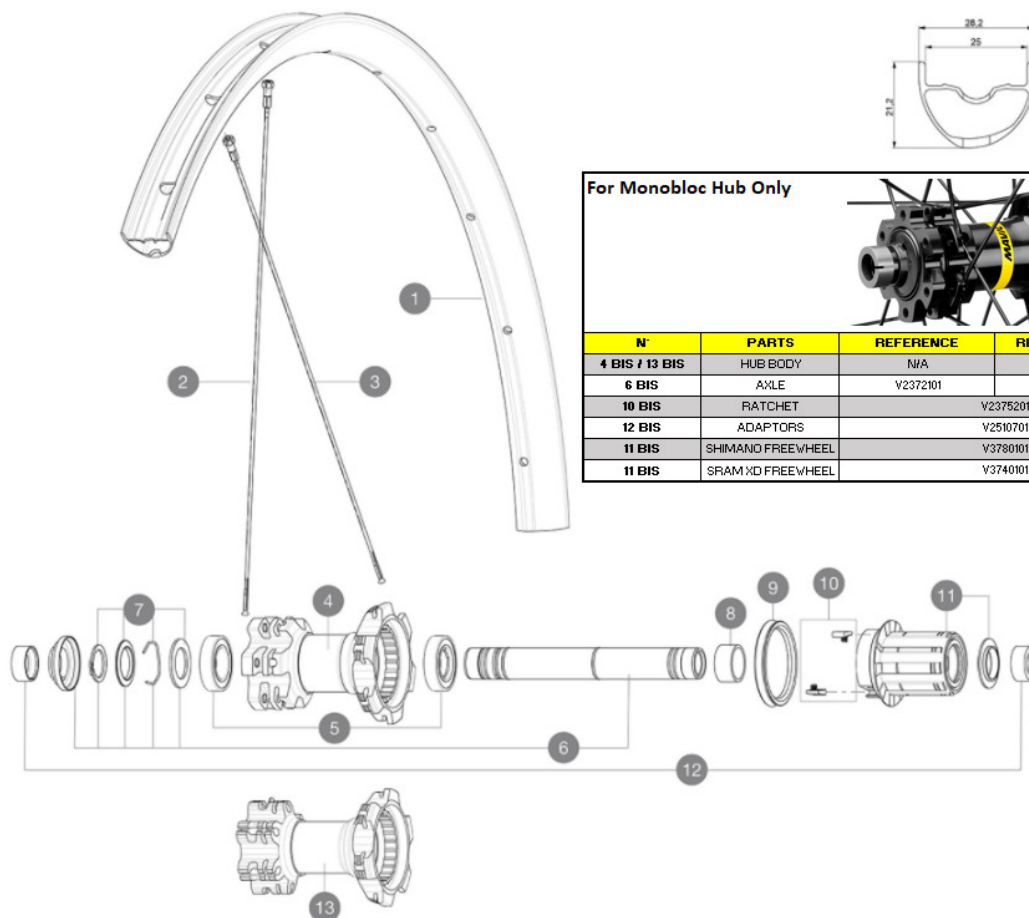

RIMS



&NBSP;:

1	V2318315	KIT FRONT/REAR RIM XA/XA LIGHT 29" 25TSS
	V2700101	UST Tape 28mm for 25 to 27mm wide rims

SPOKES

2	36690301	"12 SPOKES FRONT/OPP DRIVE SIDE CROSSONE 29"" 296mm"
3	36690401	"12 SPOKES DRIVE SIDE CROSSRONE 29"" 294mm"

HUB SHELLS

	N/A	HUB BODY
5	M40076	HUB BEARINGS 17x30x7 6903 x 2
6	V2371201	KIT REAR QRM AXLE 135-142 / BOOST 148mm
	V2372101	KIT ID360 135/142 D6T AXLE WITH CLIP
	V2372201	KIT ID360 148 D6T AXLE WITH CLIP
7	V2370401	REAR AUTO ADJUST.PLAY KIT 12MM AXLE
8	35124501	SET OF 3 REAR AXLE/FREEWHEEL BODY SPACERS
9	99610701	ITS4 SEAL
10	99610601	ITS4 PAWLS KIT
	V2375201	KIT ID360 24 TEETH 2 RATCHET + MTB SPRING + PAD (specific)
11	35126301	TS-2 FREEWHEEL BODY + SEAL 2013 (NO PAWLS) - while stock las
	V3780101	HG9 Alloy MTB Freewheel Body ID360
	V3740101	XD MTB Freewheel Body ID360
	N/A	HUB BODY

ADAPTERS

12	32965001	ADAPTER Rr 12x142mm Elite/CRide MTB (Rd)
	V2510701	ID360 EVO REAR AXLE ADAPTORS 12x142mm DCL & D6T



COMPATIBILITY

[illegible]

Freewheel: Shimano/Sram or XD	
15mm thru axle, convertible to Quick Release with optional adapters	

リム

- [illegible]

スポーク

[illegible]

ホイールハブ

[illegible]

VERSIONS

$\hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L 6\hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L$
 $\hat{A}_L \hat{A}_L \hat{A}_L$
 $\hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L 110\hat{A}_L \hat{A}_L \hat{A}_L$
 $148\hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L 10$
 $0\hat{A}_L \hat{A}_L \hat{A}_L 135/142\hat{A}_L$

ホイールの重み