

ASTM CATEGORY 4 : ENDURO AND TRAIL RIDING


For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included

Recommended tyre sizes: 50mm to 76mm (2.0" to 3.0")

## REFERENCES WHEELS

F80391 E-Deemax Pro 27,5 Ft Bst

F80381 E-Deemax Pro 27,5 Ft

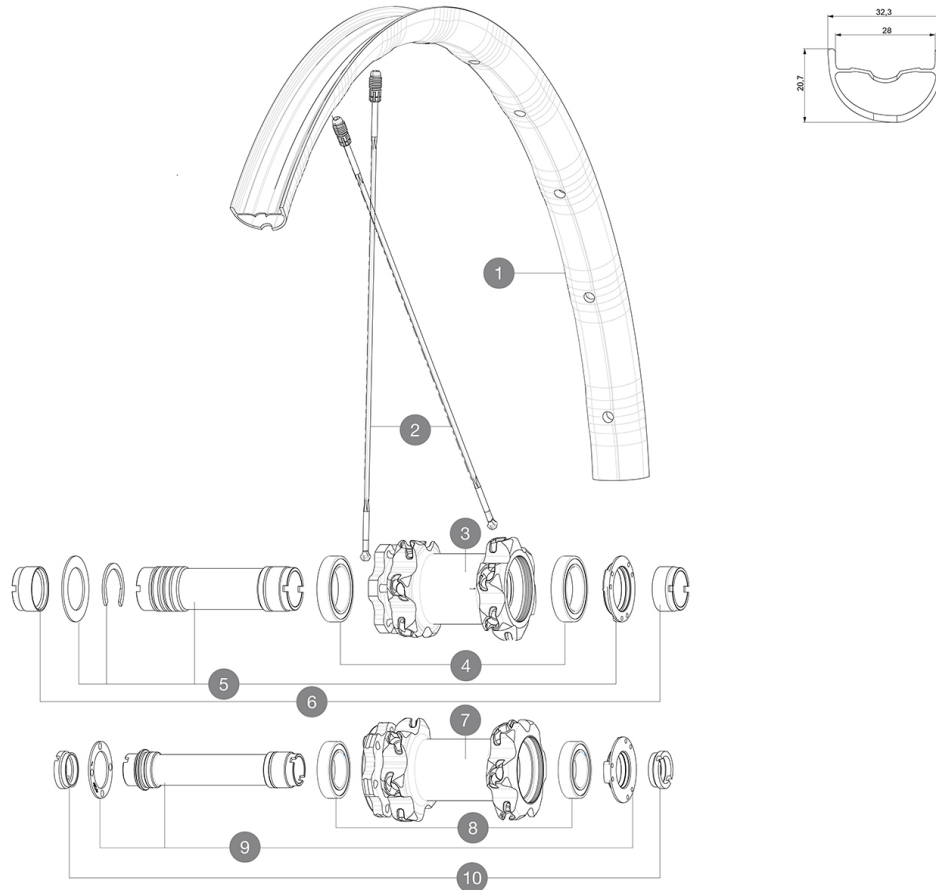

## RIMS



&NBSP;:

|   |          |                                         |
|---|----------|-----------------------------------------|
| 1 | V2319210 | KIT FRONT RIM E-DEEMAX/DEEMAX PRO 27,5" |
|---|----------|-----------------------------------------|

## SPOKES

|   |          |                                                              |
|---|----------|--------------------------------------------------------------|
| 2 | V2386101 | KIT 1 FRT/1 NDS STAMPED SPOKES 275mm DEEMAX PRO - while stoc |
| 2 | 36674901 | KIT 12 FT XMAX END/FT-NDS DEEMAX PRO 27,5" ALU SPK 275mm     |

## HUB SHELLS

|   |          |                                             |
|---|----------|---------------------------------------------|
| 3 | N/A      | HUB BODY                                    |
| 4 | M40179   | FRONT BEARING 25x37x7 20mm AXLE             |
| 5 | 30870501 | FRONT AXLE 20mm CROSSMAX + DEEMAX ULTI 2012 |
| 7 | N/A      | HUB BODY                                    |
| 8 | 99688501 | BEARING KIT 9/12/15 D6T HUB 20x32x7 6804    |
| 9 | V2370701 | KIT FRONT QRM+ AXLE BOOST INTL 110mm        |

## OPTIONS

|          |                                          |
|----------|------------------------------------------|
| V2650201 | ADAPTER Front Torque Cap 15x31 MTB QRM + |
|----------|------------------------------------------|

## ADAPTERS

|    |          |                               |
|----|----------|-------------------------------|
| 6  | 12982901 | ADAPTER Ft 20x110mm           |
| 10 | B4104401 | ADAPTER Ft 15mm QRM+          |
|    | B4104301 | ADAPTER Ft 9mm QR QRM+        |
|    | 12982801 | ADAPTER Ft 20 to 15mm         |
|    | 12982701 | ADAPTER Ft 20 to 9mm QR incl. |



# E-Deemax Pro

### DELIVERED WITH

|                                                 |  |
|-------------------------------------------------|--|
| Front 15mm adapters<br>(B4104401)               |  |
| UST valve and accessories<br>(129 838 01)       |  |
| Multifunction adjustment wrench<br>(325 423 01) |  |
| User guide                                      |  |

### COMPATIBILITY

|                                                                                |  |
|--------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram or XD                                                  |  |
| Front axle: 20mm, convertible to 15mm thru axle with included adapters         |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters |  |

### Specifications

#### RIMS

- **Material** : Mxtral
- **Joint** : SUP
- **Drilling** : Fore
- **Weight reduction** : ISM 4D
- **Valve hole diameter** : 6.5 mm
- **Tyre** : UST Tubeless and tubetype
- **Internal width** : 28 mm

Hookless profile

- **ETRTO size 27.5"** : 584x28TSS

#### SPOKES

- **Material** : Zicral
- **Shape** : straight pull, flat front and rear drive side and flat, double butted rear non drive side
- **Nipples** : Fore integrated aluminum
- **Count** : 24 front and rear
- **Lacing** : front crossed 2, rear Isopulse

#### WHEEL HUB

- **Front and rear bodies** : aluminum
- **Front bearings** : adjustable sealed cartridge bearings (QRM+), Rear bearings auto adjust sealed cartridge bearings (QRM Auto)
- **Freewheel** : ITS-4 QRM Auto alloy

#### VERSIONS

- **Color** : Black only
- **Disc standard** : 6 Bolts only
- **Hub width** : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)

#### WHEEL WEIGHTS

810