


ASTM CATEGORY 4 : offroad with jumps less than 122cm

Recommended tyre sizes: 50 to 76 mm (2.0" to 3.0")

参照ホイール

R22311 E-Dmx Pro 27,5 Bst Rr
R22711 E-Dmx Pro 27,5 Rr XD

R22721 E-Dmx Pro 27,5 Rr Bst XD
R22291 E-Dmx Pro 27,5 Rr

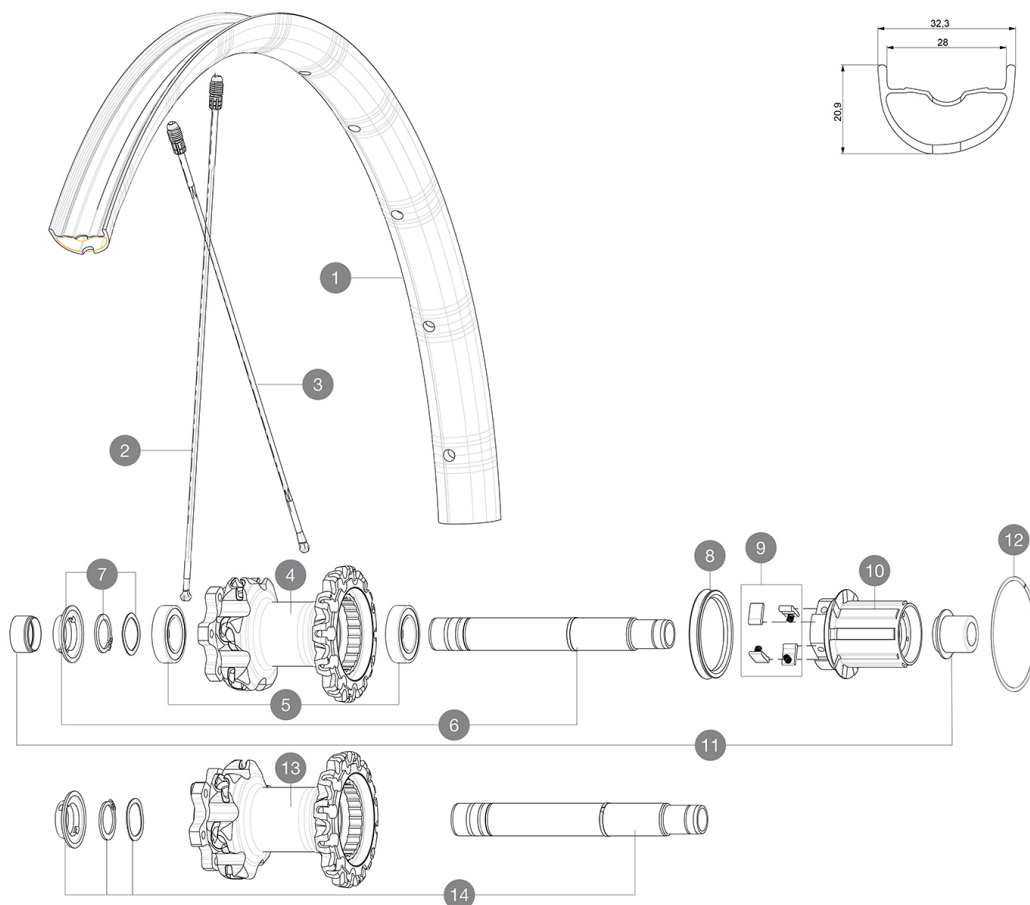

RIMS



&NBSP;:

1 V2319013 KIT REAR RIM E-DEEMAX PRO 27,5"

SPOKES

2 V2384701 KIT 12 FRONT + 1 REAR NON-DRIVE SIDE BUTTED ZICRAL SPOKES
2 V2386101 KIT 1 FRT/1 NDS STAMPED SPOKES 275mm DEEMAX PRO - white
3 36675101 12 SPOKES DRIVE SIDE CROSSMAX SLR/ENDURO 650b/27,5" 251,5mm

HUB SHELLS

4 N/A HUB BODY
5 M40076 HUB BEARINGS 17x30x7 6903 x 2
6 V2371701 KIT AXLE 135/142mm ITS4 QRM AUTO
7 V2373001 KIT ADJUST. SYSTEM QRM AUTO ID360 for 17x30x7 bearing
8 99610701 ITS4 SEAL
9 99610601 ITS4 PAWLS KIT
10 V3610101 HG MTB FREEWHEEL BODY ITS4 QRM AUTO
12 30871801 ELASTIC RING 56mm diam.
13 N/A HUB BODY
14 V2371601 KIT AXLE 148mm ITS4 QRM AUTO

ADAPTERS

11 V2510701 ID360 EVO REAR AXLE ADAPTERS 12x142mm DCL & D6T
V2510801 ID360 EVO REAR AXLE ADAPTERS 9x135mm DCL & D6T



COMPATIBILITY

ÄÏÄÏÄÏÄÏ 15mm ÄÏÄÏÄÏÄÏÄÏ (B4104401)	
USTÄÏÄÏÄÏÄÏÄÏÄÏÄÏÄÏÄÏÄÏ (129 838 01)	
ÄÏÄÏÄÏÄÏÄÏÄÏÄÏÄÏÄÏ (325 423 01)	
ÄÏÄÏÄÏÄÏÄÏÄÏÄÏ	

Freewheel: Shimano/Sram or XD	
Front axle: 20mm, convertible to 15mm thru axle with included adapters	
Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters	

リム

- $\hat{A}_i \hat{A}_j \hat{A}_k : \hat{A}_i \hat{A}_j \hat{A}_k \hat{A}_i \hat{A}_j \hat{A}_k$
- $\hat{A}_i \hat{A}_j \hat{A}_k \hat{A}_i \hat{A}_j \hat{A}_k : \text{SUP}$
- $\hat{A}_i \hat{A}_j \hat{A}_k \hat{A}_i \hat{A}_j \hat{A}_k \hat{A}_i \hat{A}_j \hat{A}_k \hat{A}_i \hat{A}_j \hat{A}_k$
- $\hat{A}_i \hat{A}_j \hat{A}_k \hat{A}_i \hat{A}_j \hat{A}_k \text{ISM 4D}$
- $\hat{A}_i \hat{A}_j \hat{A}_k \hat{A}_i \hat{A}_j \hat{A}_k \hat{A}_i \hat{A}_j \hat{A}_k 6.5 \text{ mm}$
- $\hat{A}_i \hat{A}_j \hat{A}_k \hat{A}_i \hat{A}_j \hat{A}_k \text{UST}$
- $\hat{A}_i \hat{A}_j \hat{A}_k \hat{A}_i \hat{A}_j \hat{A}_k \hat{A}_i \hat{A}_j \hat{A}_k \hat{A}_i \hat{A}_j \hat{A}_k \hat{A}_i \hat{A}_j \hat{A}_k \hat{A}_i \hat{A}_j \hat{A}_k$
- $\hat{A}_i \hat{A}_j \hat{A}_k \hat{A}_i \hat{A}_j \hat{A}_k 28 \text{ mm}$
- $\hat{A}_i \hat{A}_j \hat{A}_k \hat{A}_i \hat{A}_j \hat{A}_k \hat{A}_i \hat{A}_j \hat{A}_k$
- ETRTO $\hat{A}_i \hat{A}_j \hat{A}_k 27.5" : 584 \times 28 \text{TSS}$

スポーク

- [illegible]

ホイールハブ

$\hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L$
 $\hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L$
 $\hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L$
 $\hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L$
 $\hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \text{QRM} + \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L$
 $\hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L \hat{A}_L$
 $\hat{A}_L \hat{A}_L \text{QRM Auto } \hat{A}_L$

- Freewheel : ITS-4 QRM Auto alloy

VERSIONS

$\hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i$
 $\hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i 6 \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i$
 $\hat{A}_i \hat{A}_i \hat{A}_i$
 $\hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i 110 \hat{A}_i \hat{A}_i \hat{A}_i$
 $148 \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i \hat{A}_i 10$
 $0 \hat{A}_i \hat{A}_i \hat{A}_i 135/142 \hat{A}_i$

ホイールの重み

1050