


ASTM CATEGORY 4 : offroad with jumps less than 122cm
 44 76 mm (1.75" 3.0") 50 76 mm (2.0" 3.0")

参照ホイール

R22331	Dmx Pro 18 27.5 Rr XD	R22351	Dmx Pro 18 27.5 Bst XD Rr
R22341	Dmx Pro 18 27.5 Bst Rr	R22321	Dmx Pro 18 27.5Rr

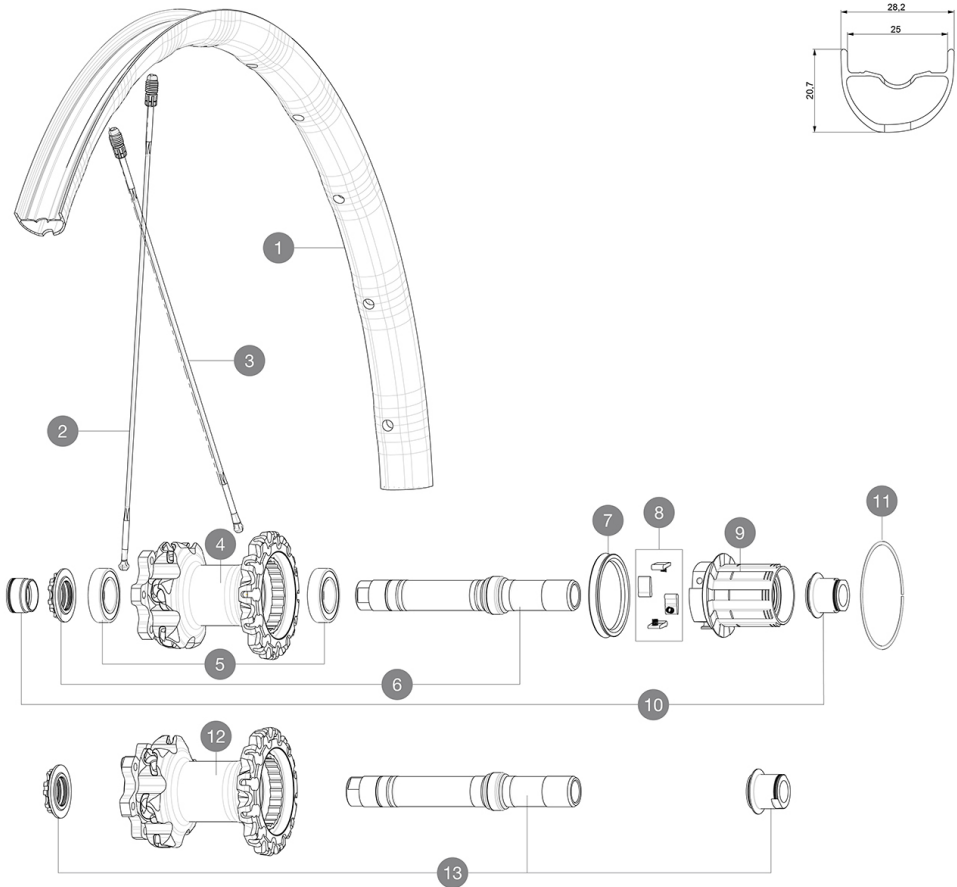

RIMS



&NBSP;:

1	V2316513	KIT REAR RIM DEEMAX PRO 27,5" 25TSS
---	----------	-------------------------------------

SPOKES

2	V2386101	KIT 1 FRT/1 NDS STAMPED SPOKES 275mm DEEMAX PRO - while
2	V2384701	12 FRONT + 1 REAR NON-DRIVE SIDE BUTTED ZICRAL SPOKES
3	36675101	10 SPOKES DRIVE SIDE CROSSMAX SLR/ENDURO 650b/27,5" 251,5m

HUB SHELLS

4	N/A	HUB BODY
5	M40076	HUB BEARINGS 17x30x7 6903 x 2
6	30870401	REAR AXLE KIT ITS4 135mm D6T/DCL 2012
7	99610701	ITS4 SEAL
8	99610601	ITS4 PAWLS KIT
9	35126001	ITS-4 FREEWHEEL BODY + SEAL 2013 (WITHOUT PAWLS)
11	30871801	ELASTIC RING 56mm diam.
12	N/A	HUB BODY
13	V2370801	KIT REAR QRM+ AXLE BOOST ITS-4 148mm

ADAPTERS

10	30859301	AXLE ADAPTER Rr 12x142/148mm Pro Carb MTB (Grey)
	30873101	2 REAR REDUCERS 12/9,5mm 2012 ITS4 HUB
	30872201	FORK REST ITS-4 135mm REAR AXLE > 2012



COMPATIBILITY

Freewheel: Shimano/Sram or XD	
Front axle: 20mm, convertible to 15mm thru axle with included adapters	
Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters	

リム

スポーク

[illegible]

ホイールハブ

Adjustable sealed cartridge bearings

VERSIONS

$\begin{aligned} & \hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2 \\ & \hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_26\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2 \\ & \hat{A}_2\hat{A}_2\hat{A}_2 \\ & \hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2110\hat{A}_2\hat{A}_2\hat{A}_2 \\ & 148\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_2\hat{A}_210 \\ & 0\hat{A}_2\hat{A}_2\hat{A}_2135/142\hat{A}_2 \end{aligned}$

ホイールの重み

900