


ASTM A1328 1 : 120  
25 32mm  
2 23mm 8.7 bars - 125 psi, 25mm 7.7 bars - 110 psi

参照ホイール

F85401 Comete Pro Carb SL T 19 Ft NT

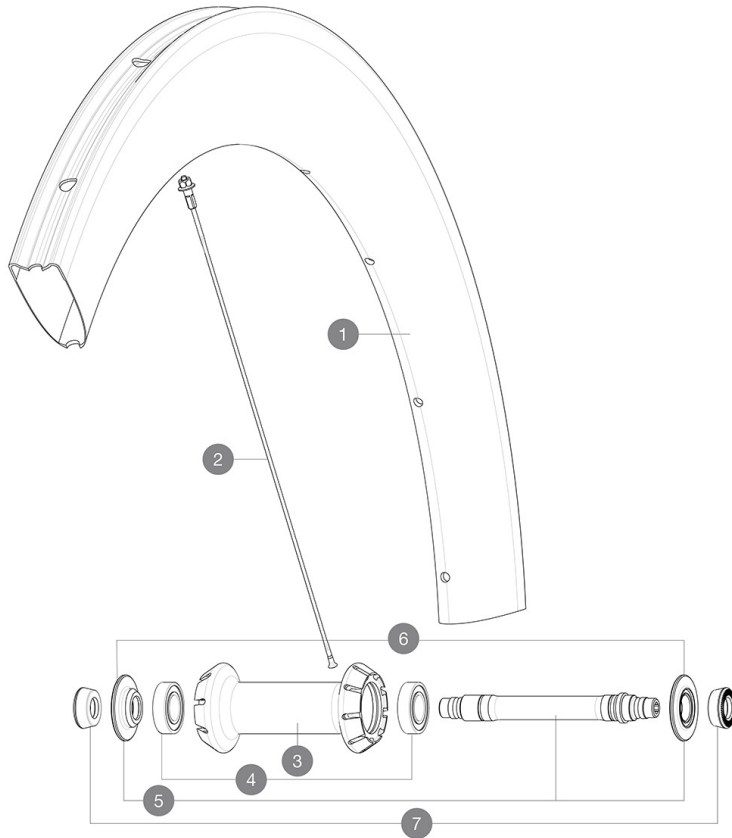

RIMS



&NBSP;:

1	V2737410	KIT FRONT RIM COMETE PRO CARBON SL T 19
---	----------	---

SPOKES

2	V3666101	KIT 2 FRT 247/2 NDS 261 COMETE PRO CARB SL T/UST AERO
2	V3663101	KIT 2 FRT BUTTED AERO STAINLESS SPOKE 247 + alu nipple + wa

HUB SHELLS

3	N/A	HUB BODY
4	M40078	FRONT HUB 6901 BEARINGS
5	30870001	FRONT AXLE ROAD RIM BRAKING QRM +
6	V2252501	FRONT SETTING NUT & DUST PROTECTOR MY16

ADAPTERS

7	35117301	FRONT OR REAR FORK REST KIT R-SYS 2013
---	----------	--

## 付属品

BR601 323 485 01 / 323 486 01	
BR601 323 485 01 / 323 486 01	
V24 603 01 / 604 01	
V24 603 01 / 604 01	
118 952 01	
118 952 01	
325 423 01	
325 423 01	

## COMPATIBILITY

XD-R	

## Specifications

### リム

- 3K 64mm
- 3K 64mm
- 6.5mm
- 6.5mm
- ETRTO 28"
- ETRTO 28"

### スポーク

- ABS
- ABS
- 18 / 20
- 18 / 20

### ホイールハブ

- QRM+QR
- QR
- 360
- 360

### ホイールの重み

### VERSIONS

-