


ASTM CATEGORY 3 : CROSS COUNTRY AND TRAIL RIDING  
 For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included  
 Recommended tyre sizes: 65mm to 81mm (2.5" to 3.2")

REFERENCES WHEELS

F82611

XA 35 27,5 Ft.Boost

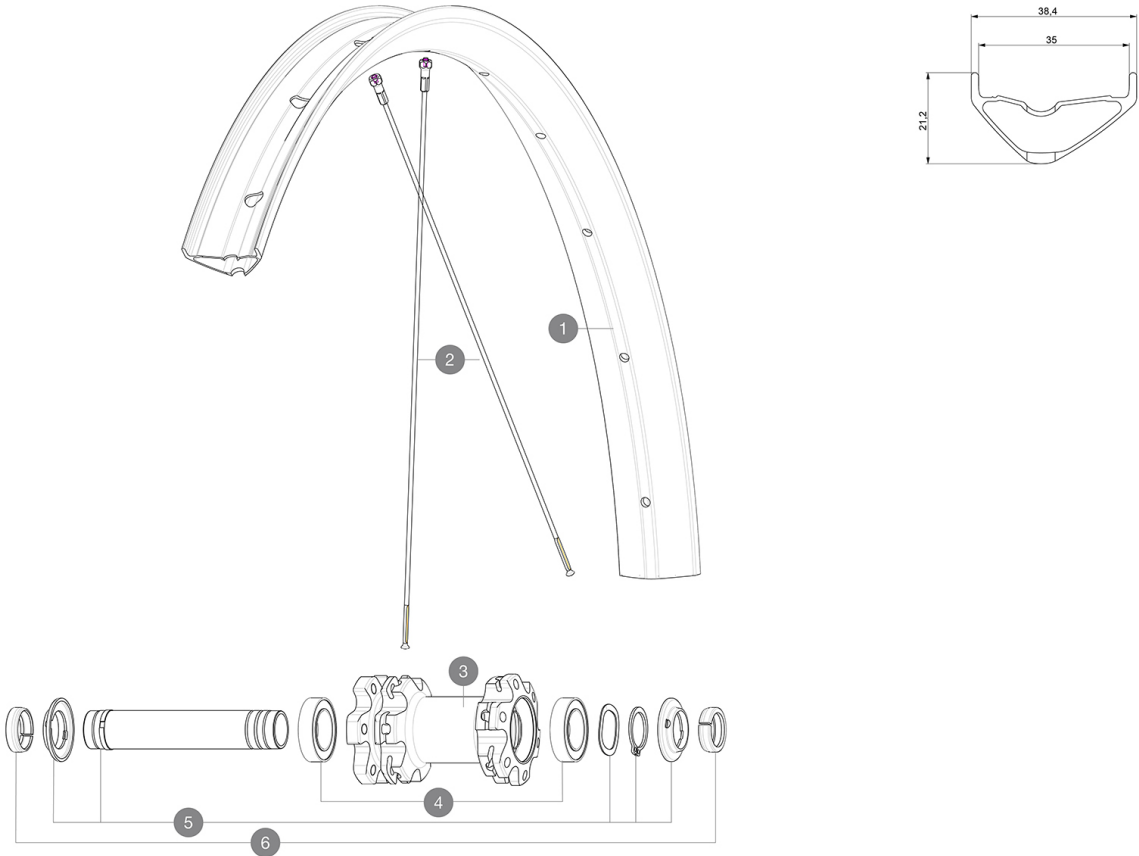

RIMS



&NBSP;:

|   |          |                                  |
|---|----------|----------------------------------|
| 1 | V3762215 | KIT FRT/REAR RIM XA 35 27,5"     |
|   | V3710101 | 40mm UST Tape For 35mm Wide Rims |

SPOKES

|   |          |                                                       |
|---|----------|-------------------------------------------------------|
| 2 | 36690101 | "KIT 12 FT/NDS CROSSONE/CROSSMAX/XA 27,5"" SPK 278mm" |
|---|----------|-------------------------------------------------------|

HUB SHELLS

|   |          |                                            |
|---|----------|--------------------------------------------|
| 3 | N/A      | HUB BODY                                   |
| 4 | V2500901 | KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP |
| 5 | V2372401 | KIT 110mm AXLE QRM AUTO MTB > 2019         |

OPTIONS

|          |                                                       |
|----------|-------------------------------------------------------|
| V2374401 | TORQUE CAPS 15*31 Adapter MTB QRM Auto > 2019 Frt HUB |
|----------|-------------------------------------------------------|

ADAPTERS

|   |          |                                      |
|---|----------|--------------------------------------|
| 6 | V2372501 | 15mm MTB Axle Cap QRM Auto From 2019 |
|   | 99694101 | ADAPTER Ft 15 to 9mm QR              |



XA35

DELIVERED WITH

|                                           |  |
|-------------------------------------------|--|
| UST valve and accessories<br>(129 838 01) |  |
| UST valve and accessories<br>(129 838 01) |  |
| Tubeless rim tape                         |  |
| Tubeless rim tape                         |  |
| User guide                                |  |
| User guide                                |  |

COMPATIBILITY

|                                 |  |
|---------------------------------|--|
| Freewheel: Shimano/Sram or XD   |  |
| Freewheel: Shimano/Sram or XD   |  |
| Freewheel: Shimano Micro Spline |  |
| Freewheel: Shimano Micro Spline |  |

Specifications

RIMS

- **Material** : S6000 Aluminum
  - **Material** : S6000 Aluminum
  - **Joint** : sleeved
  - **Joint** : sleeved
  - **Drilling** : traditional
  - **Drilling** : traditional
  - **Valve hole diameter** : 6.5 mm
  - **Valve hole diameter** : 6.5 mm
  - **Tyre** : UST Tubeless and tubetype
  - **Tyre** : UST Tubeless and tubetype
  - **Internal width** : 35 mm
  - **Internal width** : 35 mm
  - **ETRTO size 27.5"** : 584x35TSS
  - **ETRTO size 27.5"** : 584x35TSS
- Hookless profile
- Hookless profile
- Use with Mavic Tubeless Tape
- Use with Mavic Tubeless Tape

SPOKES

- **Material** : steel
- **Material** : steel
- **Shape** : straight pull, round
- **Shape** : straight pull, round
- **Count** : 24 front and rear
- **Count** : 24 front and rear
- **Lacing** : front and rear crossed 2
- **Lacing** : front and rear crossed 2

WHEEL HUB

- **Front and rear bodies** : aluminum
- **Front and rear bodies** : aluminum
- **Axle material** : aluminum
- **Axle material** : aluminum
- **Freewheel** : Instant Drive 360 steel
- **Freewheel** : Instant Drive 360 steel

VERSIONS

- **Color** : Black only
- **Disc standard** : 6 Bolts only
- **Disc standard** : 6 Bolts only
- **Hub width** : Boost only (front 110, rear 148)
- **Hub width** : Boost only (front 110, rear 148)
- **Freewheel** : Shimano/Sram or XD
- **Freewheel** : Shimano/Sram or XD

WHEEL WEIGHTS

939