2019 FRONT


ASTM CATEGORY 3: CROSS COUNTRY AND TRAIL RIDING

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't

exceed 120kg, bike included

Recommended tyre sizes: 46mm to 64mm (1.8" to 2.5")

REFERENCES WHEELS

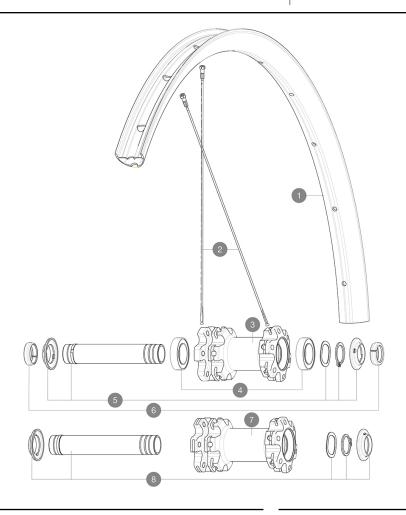



RIMS



:

1	V3761215	KIT FRT/REAR RIM CROSSMAX LIGHT 19 29"	
	V2700101	UST Tape 28mm for 25 to 27mm wide rims	

SPOKES

2	V2385401	KIT 12 FT/NDS CROSSMAX LIGHT 29" SPK 296mm

HUB SHELLS

3	N/A	HUB BODY
4	V2500901	KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP
5	V2372301	KIT 100mm AXLE QRM AUTO MTB > 2019
7	N/A	HUB BODY
8	V2372401	KIT 110mm AXLE QRM AUTO MTB > 2019

OPTIONS

V2374401 TORQUE CAPS 15*31 Adapter MTB QRM Auto > 2019 Frt HUB

ADAPTERS

6	V2372501	15mm MTB Axle Cap QRM Auto From 2019
	99694101	ΔDΔPTER Et 15 to 9mm OR

DELIVERED WITH

Front QR adapters (non-boost wheel) Rear QR adapters (non-boost wheel) Tubeless rim tape User guide

COMPATIBILITY

OUIIII ATIDIETTT	
Freewheel: Shimano/Sram or XD	
Front axle: convertible from 15mm thru axle to Quick Release with adapters (delivered with non-boost wheel)	
Rear axle: 12mm thru axle, convertible to Quick Release with adapters (delivered with non-boost wheel)	
Freewheel: Shimano Micro Spline	

Specifications

RIMS

Material: \$6000 Aluminum
 Joint: welded
 Drilling: traditional
 Valve hole diameter: 6.5 mm

Tyre: UST Tubeless and tubetype
ETRTO size 27.5": 584x25TSS
ETRTO size 29": 622x25TSS
Hookless profile

Use with Mavic Tubeless Tape

SPOKES

- Material : steel

Shape: straight pull, round
 Count: 24 front and rear
 Lacing: front and rear crossed 2

WHEEL HUB

 ${\color{red}\bullet} \, \text{Front and rear bodies}: \, \text{aluminum}$

- Axle material : aluminum

Auto adjust sealed cartridge bearings (QRM Auto),

front and rear

• Freewheel: Instant Drive 360 steel

VERSIONS

• Disc standard: 6 Bolts only

- Hub width: Boost (front 110, rear 148) or Non-

Boost (front 100, rear 135/142)
• Freewheel: Shimano/Sram or XD

WHEEL WEIGHTS