


ASTM CATEGORY 3 : CROSS COUNTRY AND TRAIL RIDING For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included Recommended tyre sizes: 46mm to 64mm (1.8" to 2.5")

REFERENCES WHEELS

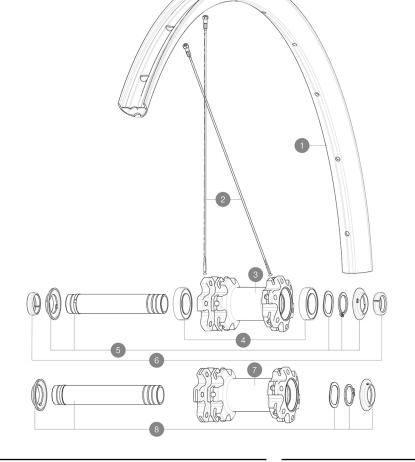

1 V3761215 V2700101

SPOKES

2 V2385401 KIT 12 FT/NDS CROSSMAX LIGHT 29'' SPK 296mm

:

HUB SHELLS

3	N/A	HUB BODY		
4	V2500901	KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP		
5	V2372301	KIT 100mm AXLE QRM AUTO MTB > 2019		
7	N/A	HUB BODY		
8	V2372401	KIT 110mm AXLE QRM AUTO MTB > 2019		

KIT FRT/REAR RIM CROSSMAX LIGHT 19 29"

UST Tape 28mm for 25 to 27mm wide rims

OPTIONS

V2374401 TORQUE CAPS 15*31 Adapter MTB QRM Auto > 2019 Frt HUB

ADAPTERS

6 V2372501 99694101

15mm MTB Axle Cap QRM Auto From 2019 ADAPTER Ft 15 to 9mm QR



DELIVERED WITH

Front QR adapters (non-boost wheel)	
Rear QR adapters (non-boost wheel)	
Tubeless rim tape	
User guide	

COMPATIBILITY

Freewheel: Shimano/Sram or XD			
Front axle: convertible from 15mm thru axle to Quick Release with adapters (delivered with non- boost wheel)			
Rear axle: 12mm thru axle, convertible to Quick Release with adapters (delivered with non-boost wheel)			
Freewheel: Shimano Micro Spline			

WHEEL WEIGHTS

Specifications

RIMS

• Material : S6000 Aluminum

Joint : welded

• Drilling : traditional

- Valve hole diameter : 6.5 mm

• Tyre : UST Tubeless and tubetype • ETRTO size 27.5" : 584x25TSS

• ETRTO size 27.5" : 584x251SS • ETRTO size 29" : 622x25TSS

Hookless profile

Use with Mavic Tubeless Tape **SPOKES**

SPUKES

• Material : steel

• Shape : straight pull, round • Count : 24 front and rear

• Lacing : front and rear crossed 2

WHEEL HUB • Front and rear bodies : aluminum • Axle material : aluminum Auto adjust sealed cartridge bearings (QRM Auto), front and rear • Freewheel : Instant Drive 360 steel VERSIONS

VLNSIUNS

Disc standard : 6 Bolts only
Hub width : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)
Freewheel : Shimano/Sram or XD