


# ASTM CATEGORY 4 : ENDURO AND TRAIL RIDING

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included

Recommended tyre sizes: 46mm to 64mm (1.8" to 2.5")

## REFERENCES WHEELS

|        |                        |        |                              |
|--------|------------------------|--------|------------------------------|
| R24471 | Deemax Pro 29 19 Rr    | R24491 | Deemax Pro 29 19 Rr Boost    |
| R24481 | Deemax Pro 29 19 Rr XD | R24511 | Deemax Pro 29 19 Rr Boost XD |

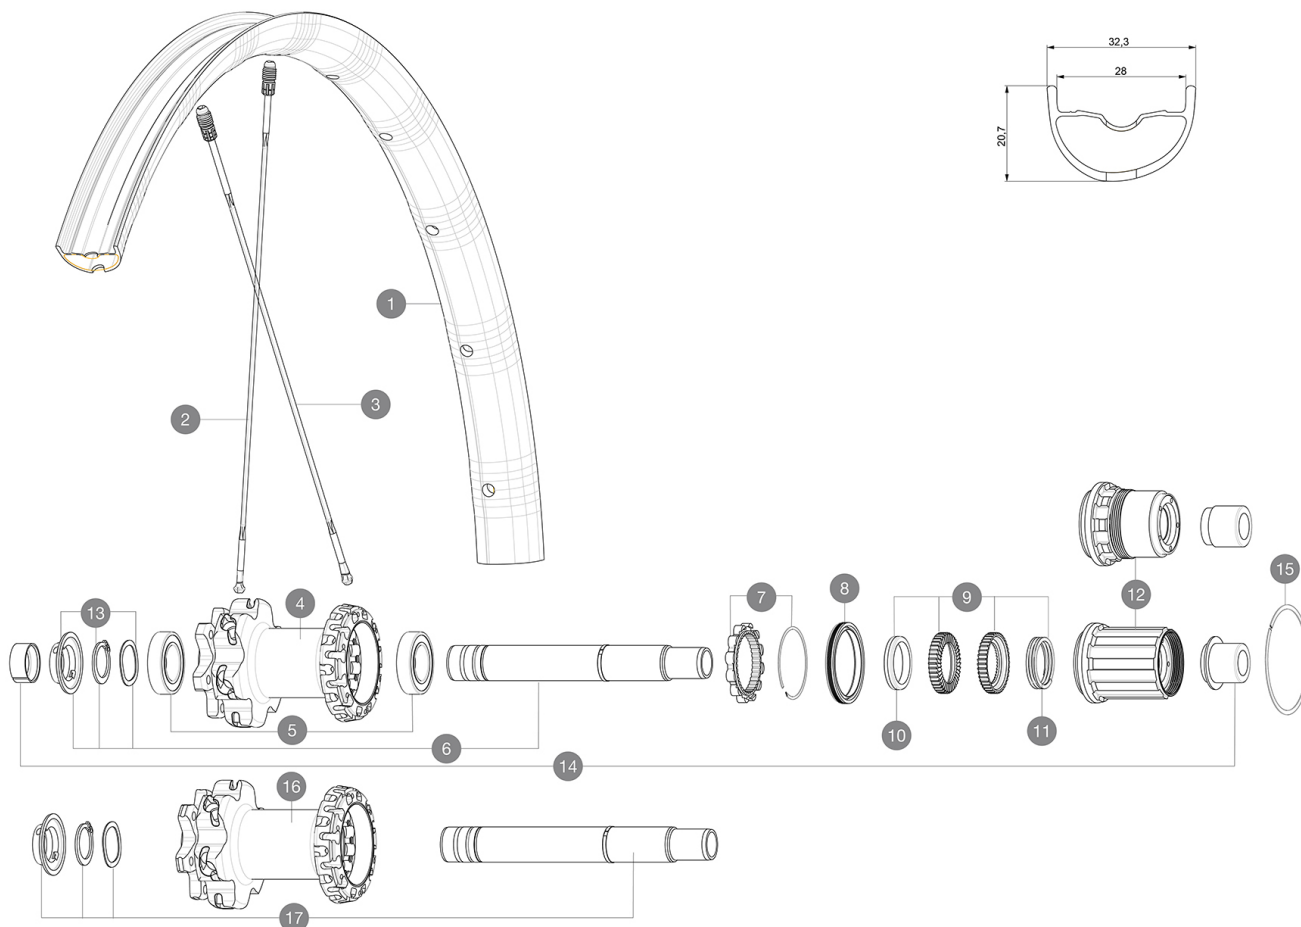

## RIMS



&NBSP;:

|   |          |                                |
|---|----------|--------------------------------|
| 1 | V3762413 | KIT REAR RIM DEEMAX PRO 19 29" |
|---|----------|--------------------------------|

## SPOKES

|   |          |                                                              |
|---|----------|--------------------------------------------------------------|
| 2 | V3820601 | KIT 2 FRT/ND S STAMPED SPOKE 293mm DEEMAX PRO 29" - while st |
| 2 | A7209901 | KIT 12 FT/ND S CROSSMAX XL/DEEMAX PRO 19 29" SPK 293mm       |
| 3 | V2386501 | KIT 12 DS CROSSMAX PRO/XA PRO/DEEMAX PRO 19 29" ALU SPOKE 2  |

## HUB SHELLS

|    |          |                                                            |
|----|----------|------------------------------------------------------------|
| 4  | N/A      | HUB BODY                                                   |
| 5  | M40076   | HUB BEARINGS 17x30x7 6903 x 2                              |
| 6  | V2372101 | KIT ID360 135/142 D6T AXLE WITH CLIP                       |
| 7  | V2252701 | KIT ID360 INSERT SHAPED EAR LOBE > 2017                    |
| 8  | V2251601 | KIT ID360 SEAL + GREASE                                    |
| 9  | V2375201 | KIT ID360 24 TEETH 2 RATCHET + MTB SPRING + PAD (specific) |
| 10 | V2375401 | KIT ID360 MTB 24T 3 NOISE REDUCING PADS                    |
| 11 | V2372901 | KIT 3 ID360 MTB SPRINGS                                    |
| 12 | V3780101 | HG9 Alloy MTB Freewheel Body ID360                         |
| 12 | V3740101 | XD MTB Freewheel Body ID360                                |
| 13 | V2373001 | KIT ADJUST. SYSTEM QRM AUTO ID360 for 17x30x7 bearing      |
| 15 | V2252201 | KIT 2 REAR HUB RETENTION RINGS 48mm                        |
| 16 | N/A      | HUB BODY                                                   |
| 17 | V2372201 | KIT ID360 148 D6T AXLE WITH CLIP                           |

## ADAPTERS

|    |          |                              |
|----|----------|------------------------------|
| 14 | V2510701 | ID360V2RrAxleAdapt12x142/148 |
|    | V2510801 | ID360 V2 RrAxleAdapt9x135    |



# Deemax Pro 29

### DELIVERED WITH

|                                                 |                                                                                   |
|-------------------------------------------------|-----------------------------------------------------------------------------------|
| UST valve and accessories<br>(129 838 01)       |  |
| Specific disc bolts<br>(308 719 01)             |                                                                                   |
| Multifunction adjustment wrench<br>(325 423 01) |                                                                                   |
| User guide                                      |                                                                                   |

### COMPATIBILITY

|                                                                                |  |
|--------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram or XD                                                  |  |
| Front axle: 20mm, convertible to 15mm thru axle with included adapters         |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters |  |
| Freewheel: Shimano Micro Spline                                                |  |

### Specifications

#### RIMS

- **Material** : Mxtral
  - **Drilling** : Fore
  - **Weight reduction** : ISM 4D
  - **Valve hole diameter** : 6.5 mm
  - **Tyre** : UST Tubeless and tubetype
  - **Internal width** : 28 mm
- Hookless profile

#### SPOKES

- **Material** : Zicral
- **Shape** : straight pull, flat
- **Nipples** : Fore integrated aluminum
- **Count** : 24 front and rear
- **Lacing** : front crossed 2, rear Isopulse

#### WHEEL HUB

- **Front and rear bodies** : aluminum
- **Front bearings** : adjustable sealed cartridge bearings (QRM+), Rear bearings auto adjust sealed cartridge bearings (QRM Auto)
- **Freewheel** : Instant Drive 360

#### VERSIONS

- **Disc standard** : 6 Bolts only
- **Hub width** : Boost only (front 110, rear 148)
- **Freewheel** : Shimano/Sram or XD

#### WHEEL WEIGHTS