


ASTM CATEGORY 4 : ENDURO AND TRAIL RIDING

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included

Recommended tyre sizes: 60mm to 76mm (2.35" to 3.0")

### REFERENCES WHEELS

|        |                    |        |                          |
|--------|--------------------|--------|--------------------------|
| F82401 | Deemax Elite 29 Ft | F82411 | Deemax Elite 29 Ft Boost |
|--------|--------------------|--------|--------------------------|

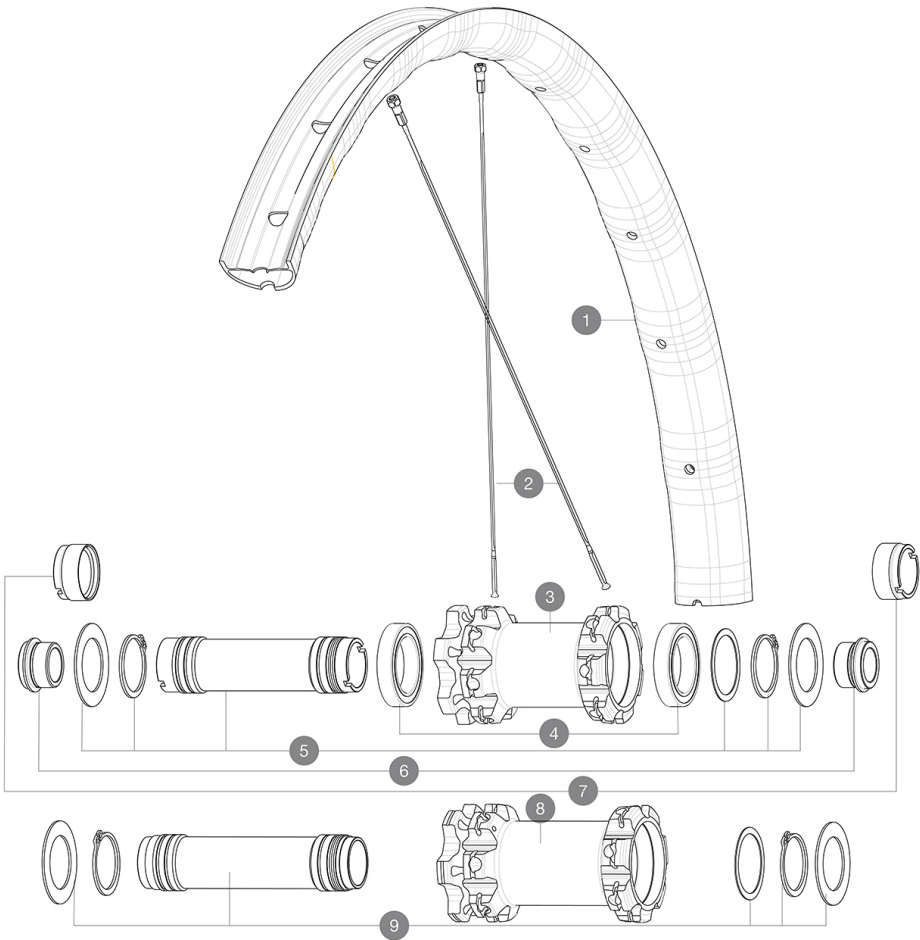

### RIMS



&NBSP;:

|   |          |                                        |
|---|----------|----------------------------------------|
| 1 | V3763310 | KIT FRONT RIM DEEMAX ELITE 29"         |
|   | V3750101 | 35mm UST Green Tape for 30mm wide rims |

### SPOKES

|   |          |                                                             |
|---|----------|-------------------------------------------------------------|
| 2 | V3821201 | KIT 14 FRONT DEEMAX ELITE/E-XA ELITE 19 29" FLAT BUTTED SPO |
|---|----------|-------------------------------------------------------------|

### HUB SHELLS

|   |          |                                             |
|---|----------|---------------------------------------------|
| 3 | N/A      | HUB BODY                                    |
| 4 | M40179   | FRONT BEARING 25x37x7 20mm AXLE             |
| 5 | V2373801 | KIT 20x110mm AXLE QRM AUTO MTB > 2019       |
| 8 | N/A      | HUB BODY                                    |
| 9 | V2373701 | KIT 20x110mm BOOST AXLE QRM AUTO MTB > 2019 |

### OPTIONS

|          |                                |
|----------|--------------------------------|
| V2650401 | TORQUECAP20*31 FT QRM AUTO MTB |
|----------|--------------------------------|

### ADAPTERS

|   |          |                               |
|---|----------|-------------------------------|
| 6 | 12982801 | ADAPTER Ft 20 to 15mm         |
| 7 | 12982901 | ADAPTER Ft 20x110mm           |
|   | 12982701 | ADAPTER Ft 20 to 9mm QR incl. |

# MAVIC Deemax Elite 29

## DELIVERED WITH

|                                           |  |
|-------------------------------------------|--|
| UST valve and accessories<br>(129 838 01) |  |
| UST valve and accessories<br>(129 838 01) |  |
| Specific disc bolts<br>(308 719 01)       |  |
| Specific disc bolts<br>(308 719 01)       |  |
| Tubeless rim tape                         |  |
| Tubeless rim tape                         |  |

## COMPATIBILITY

|                                                                                |  |
|--------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram or XD                                                  |  |
| Freewheel: Shimano/Sram or XD                                                  |  |
| Front axle: 15mm, convertible to 20mm thru axle with included adapters         |  |
| Front axle: 15mm, convertible to 20mm thru axle with included adapters         |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters |  |
| Freewheel: Shimano Micro Spline                                                |  |
| Freewheel: Shimano Micro Spline                                                |  |

## Specifications

### RIMS

- **Material** : Mxtral
- **Material** : Mxtral
- **Joint** : SUP
- **Joint** : SUP
- **Drilling** : traditional
- **Drilling** : traditional
- **Weight reduction** : ISM 4D
- **Weight reduction** : ISM 4D
- **Valve hole diameter** : 6.5 mm
- **Valve hole diameter** : 6.5 mm
- **Tyre** : UST Tubeless and tubetype
- **Tyre** : UST Tubeless and tubetype
- **Internal width** : 30 mm
- **Internal width** : 30 mm

Use with Mavic Tubeless Tape

Use with Mavic Tubeless Tape

- **ETRTO size 27.5"** : 584x30TSS
- **ETRTO size 27.5"** : 584x30TSS
- **ETRTO size 29"** : 622x30TSS
- **ETRTO size 29"** : 622x30TSS

### SPOKES

- **Material** : steel
- **Material** : steel
- **Shape** : straight pull, flat, double butted
- **Shape** : straight pull, flat, double butted
- **Count** : 28 front and rear
- **Count** : 28 front and rear
- **Lacing** : front and rear crossed 3
- **Lacing** : front and rear crossed 3

### WHEEL HUB

- **Front and rear bodies** : aluminum
  - **Front and rear bodies** : aluminum
  - **Axle material** : aluminum
  - **Axle material** : aluminum
- Auto adjust sealed cartridge bearings (QR Auto), front and rear
- Auto adjust sealed cartridge bearings (QR Auto), front and rear
- **Freewheel** : Instant Drive 360
  - **Freewheel** : Instant Drive 360

### VERSIONS

- **Color** : Black only
  - **Disc standard** : 6 Bolts only
  - **Disc standard** : 6 Bolts only
  - **Hub width** : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)
  - **Hub width** : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)
  - **Freewheel** : Shimano/Sram or XD
- Freewheel; SRAM XD, Shimano HG, Shimano Micro-Spline

### WHEEL WEIGHTS