

# MAVIC E-Deemax Pro 27,5

1  
2019  
FRONT

ASTM CATEGORY 4 : ENDURO AND TRAIL RIDING



For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 150kg, bike included

Recommended tyre sizes: 50mm to 76mm (2.0" to 3.0")

## REFERENCES WHEELS

F83621 E-Deemax Pro 27,5 19 Ft

F83631 E-Dmx Pro 27,5 19 Ft Boost

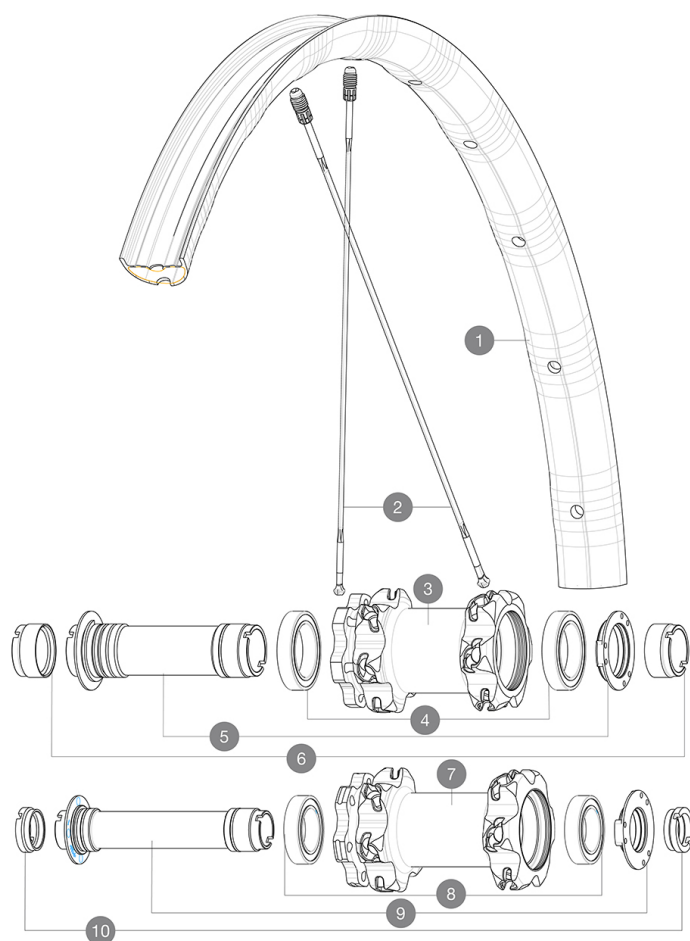

## RIMS



&NBSP;:

|   |          |                                   |
|---|----------|-----------------------------------|
| 1 | V3760210 | KIT FRONT RIM DEEMAX PRO 19 27,5" |
|---|----------|-----------------------------------|

## SPOKES

|   |          |                                                              |
|---|----------|--------------------------------------------------------------|
| 2 | V2386101 | KIT 1 FRT/1 NDS STAMPED SPOKES 275mm DEEMAX PRO - while stoc |
| 2 | V2384701 | KIT 12 FT/NDS CROSSMAX PRO 27,5" SPK 275mm                   |

## HUB SHELLS

|   |          |                                             |
|---|----------|---------------------------------------------|
| 3 | N/A      | HUB BODY                                    |
| 4 | M40179   | FRONT BEARING 25x37x7 20mm AXLE             |
| 5 | 30870501 | FRONT AXLE 20mm CROSSMAX + DEEMAX ULTI 2012 |
| 7 | N/A      | HUB BODY                                    |
| 8 | 99688501 | BEARING KIT 9/12/15 D6T HUB 20x32x7 6804    |
| 9 | V2370701 | KIT FRONT QRM+ AXLE BOOST INTL 110mm        |

## OPTIONS

|          |                                          |
|----------|------------------------------------------|
| V2650201 | ADAPTER Front Torque Cap 15x31 MTB QRM + |
|----------|------------------------------------------|

## ADAPTERS

|    |          |                               |
|----|----------|-------------------------------|
| 6  | 12982901 | ADAPTER Ft 20x110mm           |
| 10 | B4104401 | ADAPTER Ft 15mm QRM+          |
|    | B4104301 | ADAPTER Ft 9mm QR QRM+        |
|    | 12982801 | ADAPTER Ft 20 to 15mm         |
|    | 12982701 | ADAPTER Ft 20 to 9mm QR incl. |



# E-Deemax Pro 27,5

2019  
FRONT

DELIVERED WITH

|                                                 |                                                                                   |
|-------------------------------------------------|-----------------------------------------------------------------------------------|
| Computer magnet<br>(105 416 01)                 |                                                                                   |
| Computer magnet<br>(105 416 01)                 |                                                                                   |
| UST valve and accessories<br>(129 838 01)       |  |
| UST valve and accessories<br>(129 838 01)       |                                                                                   |
| Specific disc bolts<br>(308 719 01)             |                                                                                   |
| Specific disc bolts<br>(308 719 01)             |                                                                                   |
| Multifunction adjustment wrench<br>(325 423 01) |                                                                                   |
| Multifunction adjustment wrench<br>(325 423 01) |                                                                                   |
| User guide                                      |                                                                                   |
| User guide                                      |                                                                                   |

COMPATIBILITY

|                                                                                |  |
|--------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram or XD                                                  |  |
| Freewheel: Shimano/Sram or XD                                                  |  |
| Front axle: 20mm, convertible to 15mm thru axle with optional adapters         |  |
| Front axle: 20mm, convertible to 15mm thru axle with optional adapters         |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters |  |
| Freewheel: Shimano Micro Spline                                                |  |
| Freewheel: Shimano Micro Spline                                                |  |

Specifications

RIMS

- Material : Mxstal
- Material : Mxstal
- Joint : SUP
- Joint : SUP
- Drilling : Fore
- Drilling : Fore
- Weight reduction : ISM 4D
- Weight reduction : ISM 4D
- Valve hole diameter : 6.5 mm
- Valve hole diameter : 6.5 mm
- Tyre : UST Tubeless and tubetype
- Tyre : UST Tubeless and tubetype
- Internal width : 28 mm
- Internal width : 28 mm

Hookless profile  
Hookless profile

- ETRTO size 27.5" : 584x28TSS
- ETRTO size 27.5" : 584x28TSS

SPOKES

- Material : Zicral
- Material : Zicral
- Shape : straight pull, flat front and rear drive side and flat, double butted rear non drive side
- Shape : straight pull, flat front and rear drive side and flat, double butted rear non drive side
- Nipples : Fore integrated aluminum
- Nipples : Fore integrated aluminum
- Count : 24 front and rear
- Count : 24 front and rear
- Lacing : front crossed 2, rear Isopulse
- Lacing : front crossed 2, rear Isopulse

WHEEL HUB

- Front and rear bodies : aluminum
- Front and rear bodies : aluminum
- Front bearings : adjustable sealed cartridge bearings (QRM+), Rear bearings auto adjust sealed cartridge bearings (QRM Auto)
- Front bearings : adjustable sealed cartridge bearings (QRM+), Rear bearings auto adjust sealed cartridge bearings (QRM Auto)
- Freewheel : Instant Drive 360 steel
- Freewheel : Instant Drive 360 steel

VERSIONS

- Color : Black only
- Disc standard : 6 Bolts only
- Disc standard : 6 Bolts only
- Hub width : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)
- Hub width : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)
- Freewheel : Shimano/Sram or XD
- Freewheel : Shimano/Sram or XD

WHEEL WEIGHTS

845