

## ASTM CATEGORY 4 : ENDURO AND TRAIL RIDING

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 150kg, bike included

Recommended tyre sizes: 50mm to 76mm (2.0" to 3.0")


## REFERENCES WHEELS

R27821 E-DeemaxPro27,5 19 Rr XD

R27811 E-Deemax Pro 27,5 19 Rr

R27841 E-Dmx Pro 27,5 19 Rr Boost XD

R27831 E-Dmx Pro 27,5 19 Rr Boost

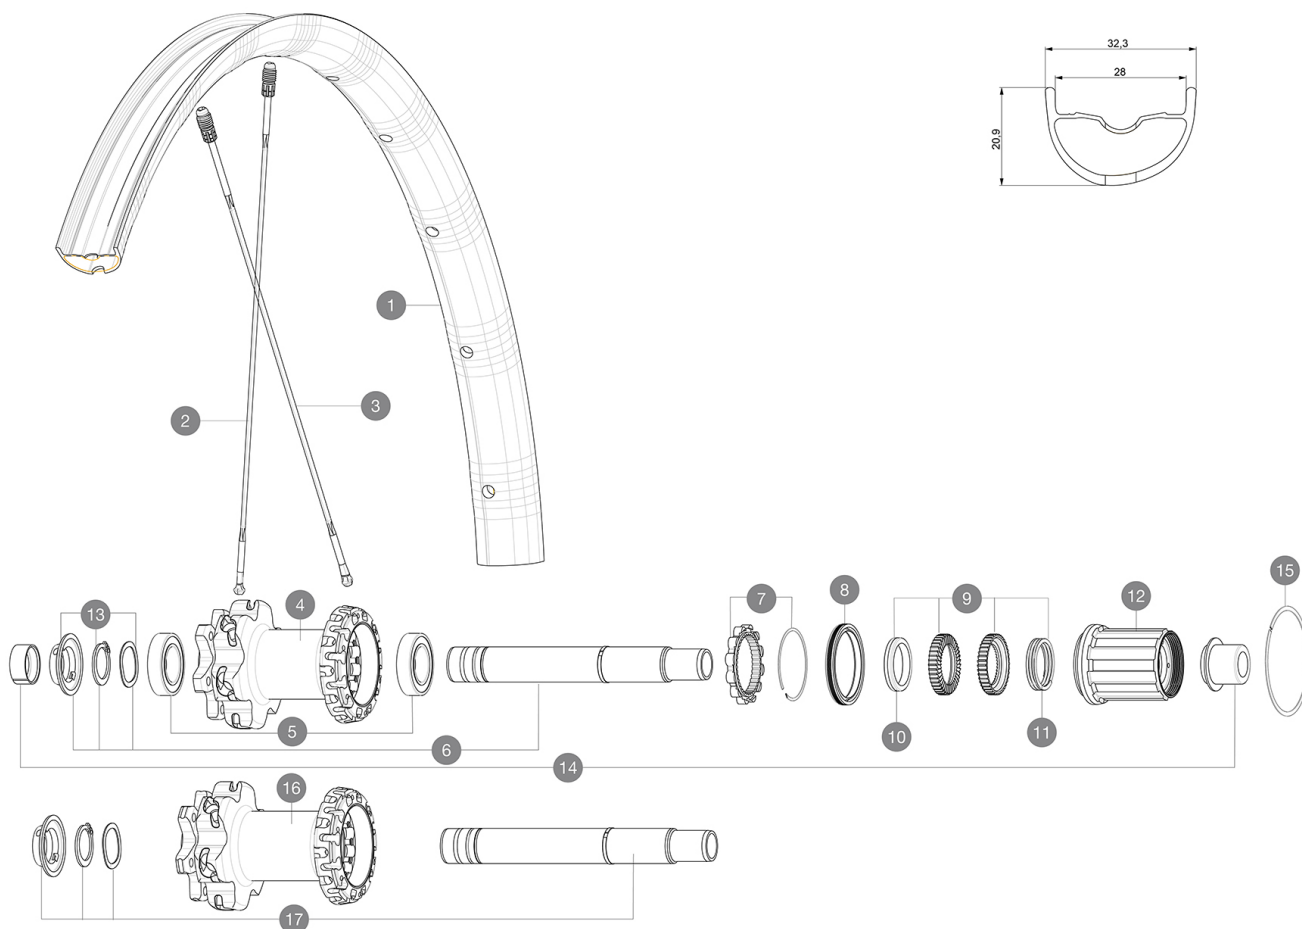

## RIMS



&amp;NBSP;:

|   |          |                                    |
|---|----------|------------------------------------|
| 1 | V3760313 | KIT REAR RIM E-DEEMAX PRO 19 27,5" |
|---|----------|------------------------------------|

## SPOKES

|   |          |                                                              |
|---|----------|--------------------------------------------------------------|
| 2 | V2384701 | KIT 12 FT/NDS CROSSMAX PRO 27,5" SPK 275mm                   |
| 2 | V2386101 | KIT 1 FRT/1 NDS STAMPED SPOKES 275mm DEEMAX PRO - while stoc |
| 3 | V2386601 | KIT 12 DS CROSSMAX PRO/XA PRO/E-DEEMAX PRO 19 27,5" BUTTED   |

## HUB SHELLS

|    |          |                                                            |
|----|----------|------------------------------------------------------------|
| 4  | N/A      | HUB BODY                                                   |
| 5  | M40076   | HUB BEARINGS 17x30x7 6903 x 2                              |
| 6  | V2372101 | KIT ID360 135/142 D6T AXLE WITH CLIP                       |
| 7  | V2252701 | KIT ID360 INSERT SHAPED EAR LOBE > 2017                    |
| 8  | V2251601 | KIT ID360 SEAL + GREASE                                    |
| 9  | V2375201 | KIT ID360 24 TEETH 2 RATCHET + MTB SPRING + PAD (specific) |
| 10 | V2375401 | KIT ID360 MTB 24T 3 NOISE REDUCING PADS                    |
| 11 | V2372901 | KIT 3 ID360 MTB SPRINGS                                    |
| 12 | V3790101 | HG9 Steel MTB Freewheel Body ID360                         |
| 13 | V2373001 | KIT ADJUST. SYSTEM QRM AUTO ID360 for 17x30x7 bearing      |
| 15 | V2252201 | KIT 2 REAR HUB RETENTION RINGS 48mm                        |
| 16 | N/A      | HUB BODY                                                   |
| 17 | V2372201 | KIT ID360 148 D6T AXLE WITH CLIP                           |

## ADAPTERS

|    |          |                              |
|----|----------|------------------------------|
| 14 | V2510701 | ID360V2RrAxleAdapt12x142/148 |
|    | V2510801 | ID360 V2 RrAxleAdapt9x135    |



# E-Deemax Pro 27,5

2019  
REAR

DELIVERED WITH

|                                                 |                                                                                   |
|-------------------------------------------------|-----------------------------------------------------------------------------------|
| Computer magnet<br>(105 416 01)                 |                                                                                   |
| Computer magnet<br>(105 416 01)                 |                                                                                   |
| UST valve and accessories<br>(129 838 01)       |  |
| UST valve and accessories<br>(129 838 01)       |                                                                                   |
| Specific disc bolts<br>(308 719 01)             |                                                                                   |
| Specific disc bolts<br>(308 719 01)             |                                                                                   |
| Multifunction adjustment wrench<br>(325 423 01) |                                                                                   |
| Multifunction adjustment wrench<br>(325 423 01) |                                                                                   |
| User guide                                      |                                                                                   |
| User guide                                      |                                                                                   |

COMPATIBILITY

|                                                                                |  |
|--------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram or XD                                                  |  |
| Freewheel: Shimano/Sram or XD                                                  |  |
| Front axle: 20mm, convertible to 15mm thru axle with optional adapters         |  |
| Front axle: 20mm, convertible to 15mm thru axle with optional adapters         |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters |  |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters |  |
| Freewheel: Shimano Micro Spline                                                |  |
| Freewheel: Shimano Micro Spline                                                |  |

Specifications

RIMS

- Material : Mxstal
- Material : Mxstal
- Joint : SUP
- Joint : SUP
- Drilling : Fore
- Drilling : Fore
- Weight reduction : ISM 4D
- Weight reduction : ISM 4D
- Valve hole diameter : 6.5 mm
- Valve hole diameter : 6.5 mm
- Tyre : UST Tubeless and tubetype
- Tyre : UST Tubeless and tubetype
- Internal width : 28 mm
- Internal width : 28 mm

Hookless profile  
Hookless profile

- ETRTO size 27.5" : 584x28TSS
- ETRTO size 27.5" : 584x28TSS

SPOKES

- Material : Zicral
- Material : Zicral
- Shape : straight pull, flat front and rear drive side and flat, double butted rear non drive side
- Shape : straight pull, flat front and rear drive side and flat, double butted rear non drive side
- Nipples : Fore integrated aluminum
- Nipples : Fore integrated aluminum
- Count : 24 front and rear
- Count : 24 front and rear
- Lacing : front crossed 2, rear Isopulse
- Lacing : front crossed 2, rear Isopulse

WHEEL HUB

- Front and rear bodies : aluminum
- Front and rear bodies : aluminum
- Front bearings : adjustable sealed cartridge bearings (QRM+), Rear bearings auto adjust sealed cartridge bearings (QRM Auto)
- Front bearings : adjustable sealed cartridge bearings (QRM+), Rear bearings auto adjust sealed cartridge bearings (QRM Auto)
- Freewheel : Instant Drive 360 steel
- Freewheel : Instant Drive 360 steel

VERSIONS

- Color : Black only
- Disc standard : 6 Bolts only
- Disc standard : 6 Bolts only
- Hub width : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)
- Hub width : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)
- Freewheel : Shimano/Sram or XD
- Freewheel : Shimano/Sram or XD

WHEEL WEIGHTS

1075