

ASTM CATEGORY 3 : CROSS COUNTRY AND TRAIL RIDING

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included

Recommended tyre sizes: 46mm to 64mm (1.8" to 2.5")



REFERENCES WHEELS

R27041 XA Pro 29 19 Rr

R27051 XA Pro 29 19 Rr Boost

R27061 XA Pro 29 19 Rr XD

R27071 XA Pro 29 19 Rr Boost XD

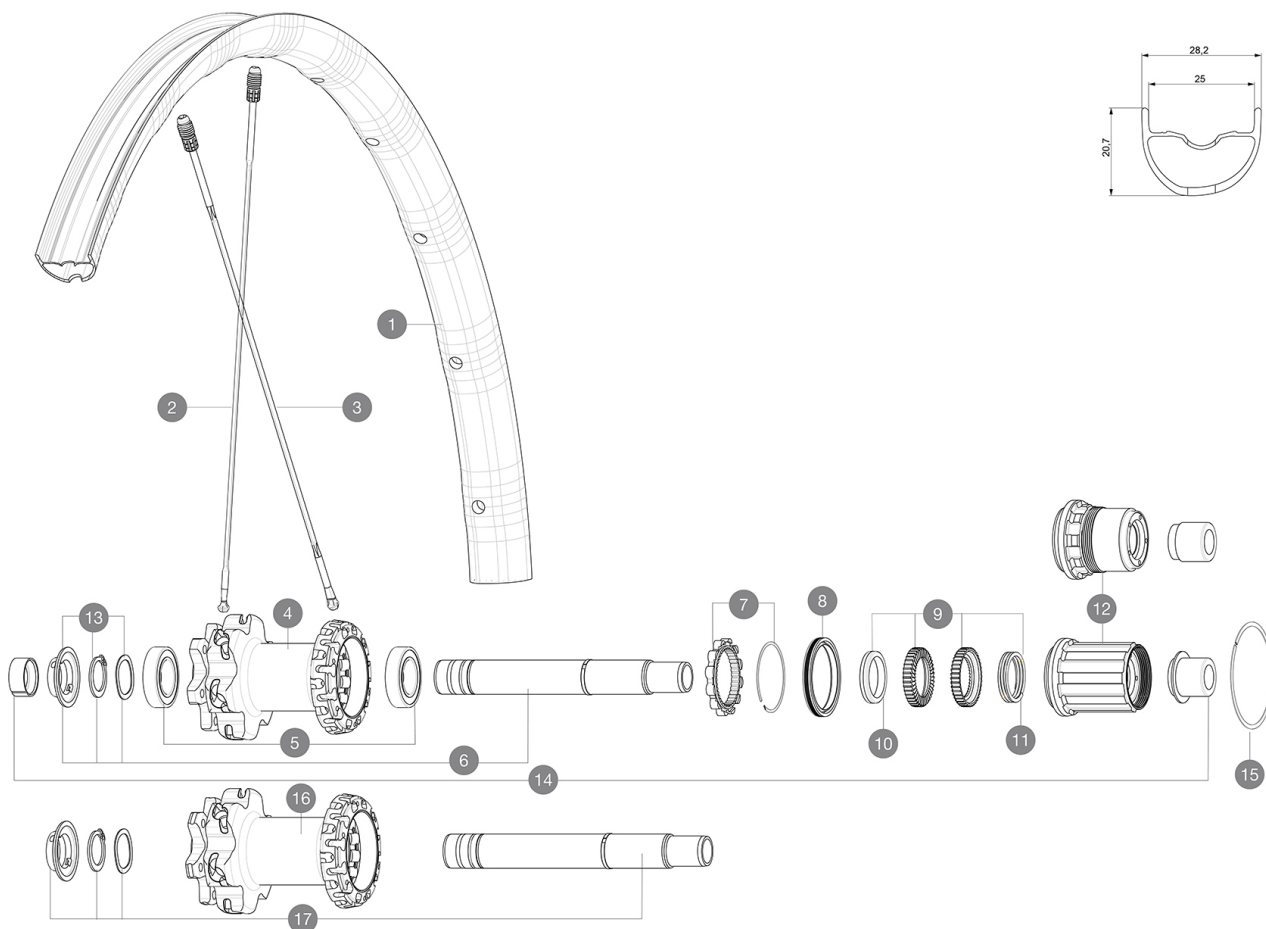

RIMS



&NBSP;:

1 V3760113 KIT REAR RIM XA PRO 19 29"

SPOKES

2 V2385601 KIT 1 FT/RR XA PRO 29" BUTTED ALU SPOK 293mm - while stock
2 V2384801 KIT 12 FT/RR CROSSMAX PRO 29" AL SPK 293mm
3 V2386501 KIT 12 DS CROSSMAX PRO/XA PRO/DEEMAX PRO 19 29" ALU SPOKE 2

HUB SHELLS

4 N/A HUB BODY
5 M40076 HUB BEARINGS 17x30x7 6903 x 2
6 V2372101 KIT ID360 135/142 D6T AXLE WITH CLIP
7 V2252701 KIT ID360 INSERT SHAPED EAR LOBE > 2017
8 V2251601 KIT ID360 SEAL + GREASE
9 V2375201 KIT ID360 24 TEETH 2 RATCHET + MTB SPRING + PAD (specific)
10 V2375401 KIT ID360 MTB 24T 3 NOISE REDUCING PADS
11 V2372901 KIT 3 ID360 MTB SPRINGS
12 V3740101 XD MTB Freewheel Body ID360
12 V3780101 HG9 Alloy MTB Freewheel Body ID360
13 V2373001 KIT ADJUST. SYSTEM QRM AUTO ID360 for 17x30x7 bearing
15 V2252201 KIT 2 REAR HUB RETENTION RINGS 48mm
16 N/A HUB BODY
17 V2372201 KIT ID360 148 D6T AXLE WITH CLIP

ADAPTERS

14 V2510701 ID360V2RrAxleAdapt12x142/148
V2510801 ID360 V2 RrAxleAdapt9x135

MAVIC

XA Pro 29 19

DELIVERED WITH

Front QR adapters (non-boost wheel)	
Rear QR adapters (non-boost wheel)	
UST valve and accessories (129 838 01)	
Specific disc bolts (308 719 01)	
Multifunction adjustment wrench (325 423 01)	
User guide	

COMPATIBILITY

Freewheel: Shimano/Sram or XD	
Front axle: convertible from 15mm thru axle to Quick Release with adapters (delivered with non-boost wheel)	
Rear axle: 12mm thru axle, convertible to Quick Release with adapters (delivered with non-boost wheel)	
Freewheel: Shimano Micro Spline	

Specifications

RIMS

- **Material** : Mxstal
- **Joint** : SUP
- **Drilling** : Fore
- **Weight reduction** : ISM 4D
- **Valve hole diameter** : 6.5 mm
- **Tyre** : UST Tubeless and tubetype
- **Internal width** : 25 mm
- **ETRTO size 27.5"** : 584x25TSS
- **ETRTO size 29"** : 622x25TSS

Hookless profile

SPOKES

- **Material** : Zicral
- **Shape** : straight pull, bladed, double butted front and rear non drive side
- **Nipples** : Fore integrated aluminum
- **Count** : 24 front and rear
- **Lacing** : front crossed 2, rear Isopulse

WHEEL HUB

- **Front and rear bodies** : aluminum
- **Axle material** : aluminum
- **Front bearings** : adjustable sealed cartridge bearings (QRM+), Rear bearings auto adjust sealed cartridge bearings (QRM Auto)
- **Freewheel** : Instant Drive 360

VERSIONS

- **Disc standard** : 6 Bolts only
- **Hub width** : Boost (front 110, rear 148) or Non-Boost (front 100, rear 135/142)
- **Freewheel** : Shimano/Sram or XD

WHEEL WEIGHTS