


ASTM CATEGORY 2 : road and offroad with jumps less than 15cm For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included Recommended tyre sizes: 25 to 32 mm Max. Pressure: see indication on wheel and tyre. If they differ, use the lower of the 2

REFERENCES WHEELS

R33611 Cosmic Elite UST 20 Rr

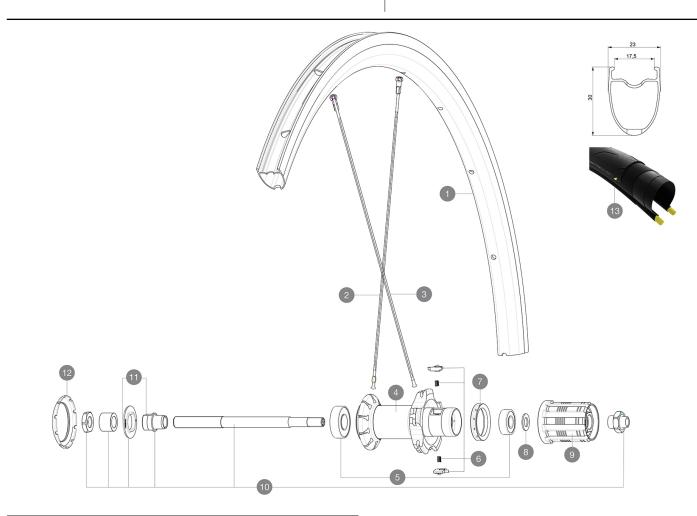

:

| 1 | V2732615 | KIT FRONT/REAR RIM COSMIC ELITE UST |
|---|----------|---|
| | V2900101 | 23mm UST Tape For 17 to 18 Wide Road Rims |

SPOKES

| 2 | V2739215 | Kit 10 Frt/Rear non drive side Cosmic Elite UST 20 butted sp |
|---|----------|--|
| 3 | V3660101 | KIT 10 DS COSMIC ELITE UST BUTTED SPOKE 292mm |

HUB SHELLS

| 4 | N/A | HUB BODY |
|----|----------|---|
| 5 | M40660 | REAR HUB 608+6001 BEARINGS |
| 6 | M40578 | FTSL PAWLS KIT (ROAD WHEELS) |
| 7 | 99500001 | FTSL/FTSX FREEHUB BODY SEAL |
| 8 | 30872801 | SET OF 3 INTERNAL SILVER SPACERS 9mm FTS-L |
| 9 | 30871101 | FTS-L ROAD FREEWHEEL BODY HG11 8/9 compatible |
| 10 | 99603901 | REAR AXLE QRM ROAD 2008 |
| 11 | 99603801 | SHORT EXPENSIBLE BEARING SUPPORTS > 2008 |
| 12 | 12034401 | KIT 3 HUB CAPS AERO 10 SLOTS BLACK |

MAVIC Cosmic Elite UST

DELIVERED WITH

| Mavic tyre sealant (rear wheel) (355 466 01) | |
|--|---|
| Tyre sealant syringe | |
| BR101 quick releases (M40350 frt, M40351 rear road, M40352 rear MTB) | |
| UST valve and accessories (129 838 01) | Â |
| Tubeless rim tape | |
| User guide | |

COMPATIBILITY

| Freewheel: Shimano/Sram, convertible to Campagnolo with optional driver body | |
|---|--|
| Front axle: Quick Release only | |
| Rear axle: Quick Release only | |

Specifications

RIMS

• Material : S6000 Aluminum

-Height: 30 mm

- Joint : SUP

- Drilling : traditional
 Brake track : UB Control
- Valve hole diameter: 6.5 mm
- Tyre : UST Tubeless and tubetype
- Internal width : 17 mm
- ETRTO size : 622x17TC ROAD

Use with Mavic Tubeless Tape

SPOKES

- Material : steel • Shape : straight pull, flat • Nipples : steel, ABS - Count: 20 front and rear - Lacing : radial front and rear non-drive side, crossed 2 rear drive side

WHEEL HUB

• Front and rear bodies : aluminum - Axle material : steel Sealed cartridge bearings (QRM) • Freewheel : FTS-L steel VERSIONS

-Color: Black only

WHEEL WEIGHTS

955