ASTM CATEGORY 2 : road and offroad with jumps less than 15cm  $\,$ 


For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included

Recommended tyre sizes: 25 to 32 mm

Max. Pressure: see indication on wheel and tyre. If they differ, use the lower of the  $2\,$ 

#### **REFERENCES WHEELS**

R33611 Cosmic Elite UST 20 Rr

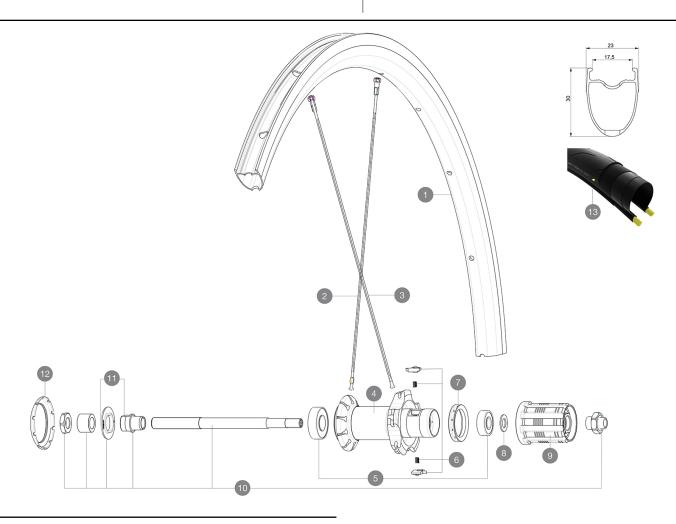

#### **RIMS**



# :

1	V2732615	KIT FRONT/REAR RIM COSMIC ELITE UST	
	V2900101	23mm UST Tape For 17 to 18 Wide Road Rims	

## **SPOKES**

2	V2739215	Kit 10 Frt/Rear non drive side Cosmic Elite UST 20 butted sp
3	V3660101	KIT 10 DS COSMIC ELITE UST BUTTED SPOKE 292mm

# **HUB SHELLS**

4	N/A	HUB BODY
5	M40660	REAR HUB 608+6001 BEARINGS
6	M40578	FTSL PAWLS KIT (ROAD WHEELS)
7	99500001	FTSL/FTSX FREEHUB BODY SEAL
8	30872801	SET OF 3 INTERNAL SILVER SPACERS 9mm FTS-L
9	30871101	FTS-L ROAD FREEWHEEL BODY HG11 8/9 compatible
10	99603901	REAR AXLE QRM ROAD 2008
11	99603801	SHORT EXPENSIBLE BEARING SUPPORTS > 2008
12	12034401	KIT 3 HUB CAPS AERO 10 SLOTS BLACK



# MAVIC Cosmic Elite UST

#### **DELIVERED WITH**

The state of the s	
Mavic tyre sealant (rear wheel)	
(355 466 01)	
Tyre sealant syringe	
BR101 quick releases	
(M40350 frt, M40351 rear road, M40352 rear	
MTB)	
l milb)	
UST valve and accessories	Ą
(129 838 01)	<u> </u>
(120 000 0.)	ŏ
	ı ı
	<u> </u>
Tubeless rim tape	
Tabologo IIII tapo	
Heer guide	
User guide	

#### **COMPATIBILITY**

Freewheel: Shimano/Sram, convertible to Campagnolo with optional driver body	
Front axle: Quick Release only	
Rear axle: Quick Release only	

# **Specifications**

## RIMS

- Material: S6000 Aluminum - Height: 30 mm - Joint : SUP • Drilling: traditional
• Brake track: UB Control • Valve hole diameter: 6.5 mm ■ Tyre: UST Tubeless and tubetype  $\textbf{.} \ \textbf{Internal width}: \ 17 \ \text{mm} \\$ ■ ETRTO size: 622x17TC ROAD Use with Mavic Tubeless Tape

#### **SPOKES**

- Material : steel - Shape: straight pull, flat • Nipples : steel, ABS • Count: 20 front and rear

• Lacing: radial front and rear non-drive side,

crossed 2 rear drive side

# WHEEL HUB

• Front and rear bodies : aluminum -Axle material : steel Sealed cartridge bearings (QRM) • Freewheel: FTS-L steel

# **VERSIONS**

■ Color: Black only

#### WHEEL WEIGHTS

955