

ASTM CATEGORY 1 : road only


For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included

Recommended tyre sizes: 25 to 32 mm

Max. Pressure: see indication on wheel and tyre. If they differ, use the lower of the 2

## REFERENCES WHEELS

F87721 Comete Pro Carbon UST Ft

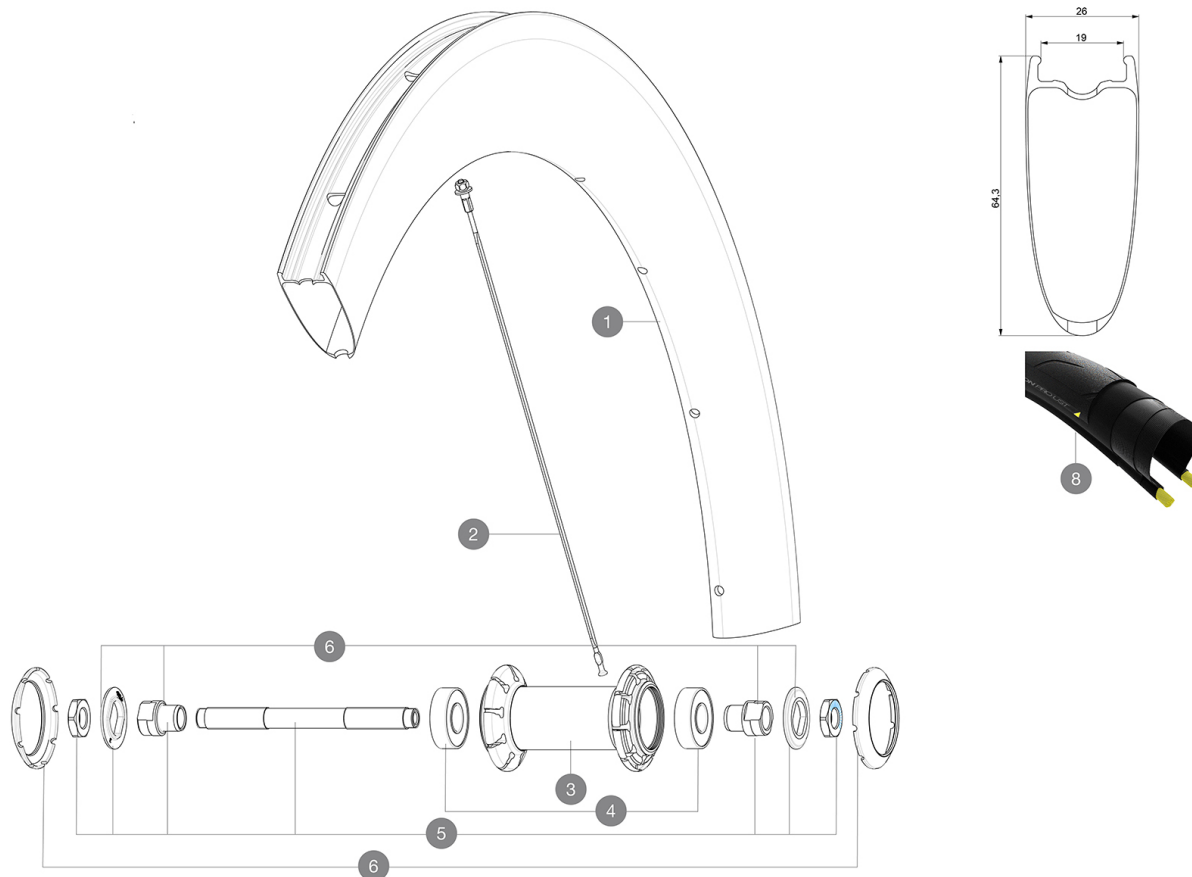

## RIMS



&NBSP;:

|   |          |   |
|---|----------|---|
| 1 | V2737210 | KIT FRONT RIM COMETE PRO CARBON SL UST 19 |
|   | V3720101 | 25mm UST Tape for 19 to 22mm Road Rims    |

## SPOKES

|   |          |  |
|---|----------|--|
| 2 | V4161401 | Kit 12 front/rear NDS butted stainless spoke 245mm Com Pro C |
| 2 | V3668701 | Kit 2 front/rear 245mm stamped butted spoke Comete Pro Carbo |
| 2 | V4161501 | Kit 2 front/rear 245mm stamped butted stainless spoke Comete |
| 2 | V3668601 | Kit 12 front/rear NDS butted spoke 245mm Com Pro Carbon UST  |

## HUB SHELLS


|   |          |  |
|---|----------|--|
| 3 | N/A      | HUB BODY                                 |
| 4 | M40318   | KIT 2 HUB BEARINGS 6001                  |
| 5 | 99603801 | SHORT EXPENSIBLE BEARING SUPPORTS > 2008 |
| 6 | 99603701 | FRONT AXLE QRM ROAD 2008                 |
| 7 | 12034401 | KIT 3 HUB CAPS AERO 10 SLOTS BLACK       |



# Comete Pro Carbon UST

2020  
FRONT

## DELIVERED WITH

|   |   |
|---|---|
| Mavic tyre sealant (rear wheel)<br>(355 466 01)                       |   |
| BR301 quick releases<br>(V24 501 01 frt, V24 502 01 rear)             |   |
| Tyre sealant syringe  |   |
| Carbon brake pads<br>(V24 603 01 Shimano/Sram, V24 604 01 Campagnolo) |   |
| UST valve and accessories<br>(129 838 01)                             |  |
| Tubeless rim tape   |   |
| User guide  |   |

## COMPATIBILITY

|  |  |
|--|--|
| Freewheel: Shimano/Sram, convertible to Campagnolo with optional driver body |  |
| Front axle: Quick Release only   |  |
| Rear axle: Quick Release only  |  |

## Specifications

### RIMS

- **Material** : 3K carbon fibers
  - **Height** : 64mm
  - **Drilling** : traditional
  - **Brake track** : carbon with iTgMAX technology
  - **Valve hole diameter** : 6.5 mm
  - **Tyre** : UST Tubeless and tubetype
  - **Internal width** : 19 mm
  - **ETRTO size** : 622x19TC Road
- Use with Mavic Tubeless Tape

### SPOKES

- **Material** : steel
- **Shape** : straight pull, flat
- **Nipples** : steel, ABS
- **Count** : front 18, rear 20
- **Lacing** : radial front and rear non-drive side, crossed 2 rear drive side

### WHEEL HUB

- **Front and rear bodies** : aluminum
  - **Axle material** : steel
- Sealed cartridge bearings (QRM)
- **Freewheel** : FTS-L steel

### VERSIONS

- **Color** : Black only

### WHEEL WEIGHTS

835