
ASTM CATEGORY 4: ENDURO AND TRAIL RIDING

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 150kg, bike included

Recommended tyre sizes: 65mm to 81mm (2.5" to 3.2")

REFERENCES WHEELS

F87231 E-XA35 Elite 27,5 Ft Boost

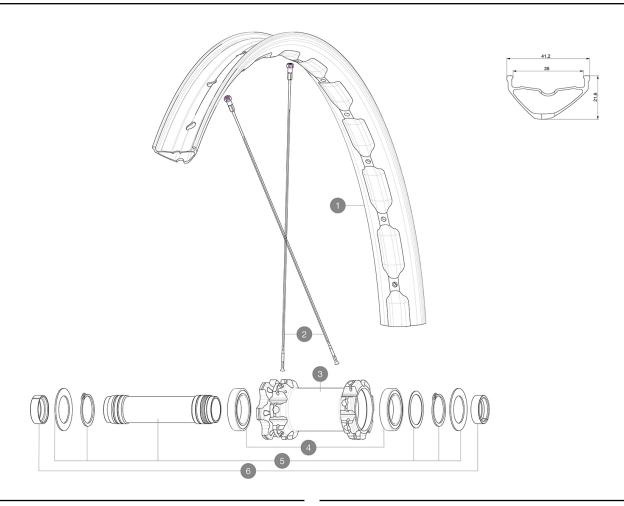

RIMS



:

1	janteavarvttdisc	FRONT/REAR MTB DISC RIM
	V3710101	40mm UST Tape For 35mm Wide Rims

SPOKES

HUB SHELLS

3	N/A	HUB BODY
4	M40179	FRONT BEARING 25x37x7 20mm AXLE
5	V2373701	KIT 20x110mm BOOST AXLE QRM AUTO MTB > 2019

OPTIONS

V2650401 TORQUECAP20*31 FT QRM AUTO MTB

ADAPTERS

6	V2680401	20x110 BOOST Front Adapter MTB wheels	
	12982801	ADAPTER Ft 20 to 15mm	



DELIVERED WITH

UST valve and accessories (129 838 01)	C	
Specific disc bolts (308 719 01)		
Tubeless rim tape		
Replacement spokes (2 with the front wheel and 4 with the rear)		

COMPATIBILITY

Freewheel: Shimano/Sram or XD	
Front axle: 15mm, convertible to 20mm thru axle with included adapters	
Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters	
Freewheel: Shimano Micro Spline	

Specifications

RIMS

Material: Maxtal
Joint: SUP
Drilling: traditional
Weight reduction: ISM 4D
Valve hole diameter: 6.5 mm
Tyre: UST Tubeless and tubetype
Internal width: 35 mm
FTRTO size 27.5": 584x35TC
Use with Mavic Tubeless Tape

SPOKES

- Material : steel

• Shape: straight pull, flat, double butted

• Count: 28 front and rear • Lacing: front and rear crossed 3

WHEEL HUB

Front and rear bodies : aluminumAxle material : aluminum

Auto adjust sealed cartridge bearings (QRM Auto),

front and rear

• Freewheel: Instant Drive 360 • Freewheel: Instant Drive 360 steel

VERSIONS

-Color: Black only

• Disc standard: 6 Bolts only

Hub width: Boost only (front 110, rear 148)Freewheel: Shimano/Sram or XD

WHEEL WEIGHTS

940