


ASTM CATEGORY 4 : ENDURO AND TRAIL RIDING

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 150kg, bike included

Recommended tyre sizes: 65mm to 81mm (2.5" to 3.2")

## REFERENCES WHEELS

F87231 E-XA35 Elite 27,5 Ft Boost

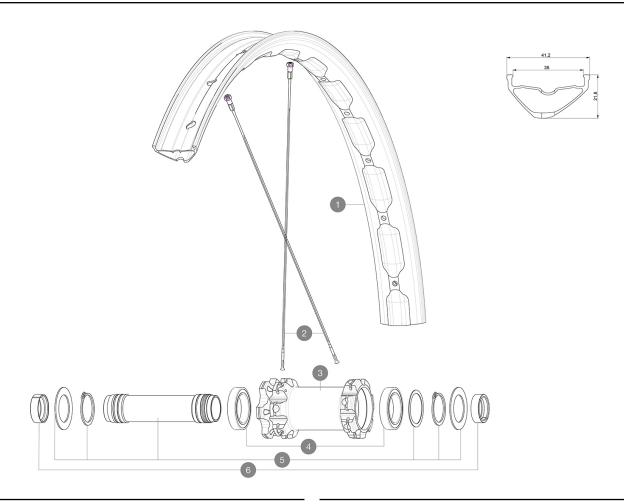

# **RIMS**



:

1	janteavarvttdisc FRONT/REAR MTB DISC RIM	
	V3710101	40mm UST Tape For 35mm Wide Rims

# **SPOKES**

2 V3820701 KIT 14 FRONT DEEMAX ELITE/E-XA ELITE 19 27,5" FLAT BUTTED S	
--	--

# **HUB SHELLS**

3	N/A	HUB BODY
4	M40179	FRONT BEARING 25x37x7 20mm AXLE
5	V2373701	KIT 20x110mm BOOST AXLE QRM AUTO MTB > 2019

# **OPTIONS**

V2650401 TORQUECAP20\*31 FT QRM AUTO MTB

## **ADAPTERS**

6	V2680401	20x110 BOOST Front Adapter MTB wheels
	12982801	ADAPTER Ft 20 to 15mm



## **DELIVERED WITH**

UST valve and accessories (129 838 01)	A Company
Specific disc bolts (308 719 01)	
Tubeless rim tape	
Replacement spokes (2 with the front wheel and 4 with the rear)	

## **COMPATIBILITY**

Freewheel: Shimano/Sram or XD	
Front axle: 15mm, convertible to 20mm thru axle with included adapters	
Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters	
Freewheel: Shimano Micro Spline	

# **Specifications**

#### **RIMS**

Material: Maxtal
Joint: SUP
Drilling: traditional
Weight reduction: ISM 4D
Valve hole diameter: 6.5 mm
Tyre: UST Tubeless and tubetype
Internal width: 35 mm
FTRTO size 27.5": 584x35TC
Use with Mavic Tubeless Tape

## **SPOKES**

- Material : steel

• Shape: straight pull, flat, double butted
• Count: 28 front and rear

• Count : 28 front and rear • Lacing : front and rear crossed 3

#### WHEEL HUB

Front and rear bodies : aluminumAxle material : aluminum

Auto adjust sealed cartridge bearings (QRM Auto),

front and rear

• Freewheel: Instant Drive 360 • Freewheel: Instant Drive 360 steel

#### **VERSIONS**

-Color: Black only

• Disc standard: 6 Bolts only

Hub width: Boost only (front 110, rear 148)Freewheel: Shimano/Sram or XD

#### WHEEL WEIGHTS

940