

MAVIC Cosmic Pro Carbon Disc TDF

2020 FRONT

ASTM CATEGORY 1 : road only


For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included


Recommended tyre sizes: 25 to 32 mm

Max. Pressure: see indication on wheel and tyre. If they differ, use the lower of the $2\,$

REFERENCES WHEELS

F89391 CosProCarb UST DCL TDF2 Ft

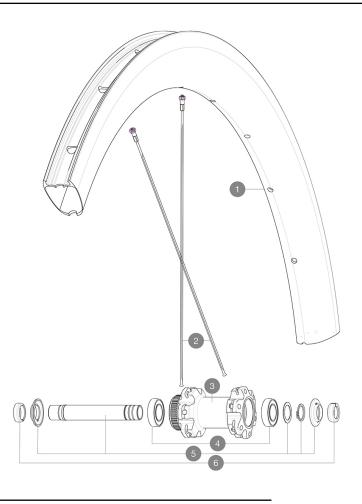





RIMS



:

1	V4092815	Kit Front/Rear rim Cosmic SL 45 Disc
1	V4091010	KIT FRONT RIM COSMIC PRO CARBON UST DISC TdF 20 - while stoc
	V2620101	UST RIM TAPE 25mm (for 21-24mm wide rim)

SPOKES

2	V4161201	Kit 12 Front/Rear non Drive Side Stainless Spokes 273 Cosmic
2	V3665901	KIT 12 FRT/NDS COSMIC PRO CARBON UST Disc SPOKE 273 + nipple

HUB SHELLS

3	N/A	HUB BODY
4	M40129	KIT 2 BEARINGS 6902 15x28x7
5	V2373301	KIT QRM AUTO FRONT AXLE 12mm > 2019

ADAPTERS

6	V2680501	12mm Road Axle Cap QRM Auto
	V2680301	"Kit Ft Road Adapter 12 >> 9mm"



MAVIC Cosmic Pro Carbon Disc TDF

FRONT

DELIVERED WITH

Mavic tyre sealant (rear wheel)	
(355 466 01)	
(**************************************	
Tyre sealant syringe	
Front QR adapters	
(996 941 01 for MTB or B41 043 01 for road)	
(**************************************	
Rear QR adapters for Instant Drive 360	
(B49 894 01)	
,	
	A
UST valve and accessories	l ä
(129 838 01)	<u> </u>
	₽
	ı ı
Tubologo rim tano	T
Tubeless rim tape	
User guide	
Oser guide	

COMPATIBILITY

Freewheel: Shimano/Sram, convertible to Campagnolo and XD-R with optional driver bodies	
Front axle: 12x100 thru axle, easily convertible to quick release with included adapters. Not compatible with 15mm through axles.	
Rear axle: 12mm thru axle, convertible to Quick Release with included adapters	

Specifications

• Material: 3K carbon fibers - Height: 45 mm • Drilling : traditional Disc brake specific profile • Valve hole diameter: 6.5 mm ■ Tyre: UST Tubeless and tubetype • Internal width: 19 mm • ETRTO size: 622x19TC Road Use with Mavic Tubeless Tape

SPOKES

- Material : steel - Shape: straight pull, flat - Nipples: steel, ABS - Count: 24 front and rear • Lacing: front and rear crossed 2

WHEEL HUB

• Front and rear bodies : aluminum -Axle material : aluminum

Auto adjust sealed cartridge bearings (QRM Auto),

front and rear

• Freewheel: Instant Drive 360

• Front: Quick release and 12x100 through axle

compatible

• Rear: Quick Release, 12x142 and 12x135

compatible

VERSIONS

-Color: Black only

■ Disc standard : Center Lock(R) only

WHEEL WEIGHTS

780