# MAVIC ALLROAD PRO CARBON SL DISC



ASTM CATEGORY 2 : road and offroad with jumps less than 15cm
Maximum tyre pressure: 4.4bar/64PSI with a 28mm tyre - 2.6bar/38PSI with a 64mm tyre
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesnn't exceed 120kg, bike included
Recommended tyre sizes: 28 to 64 mm (1.1" to 2.5")
Max. Pressure: see indication on wheel and tyre. If they differ, use the lowest of the 2

## REFERENCES WHEELS

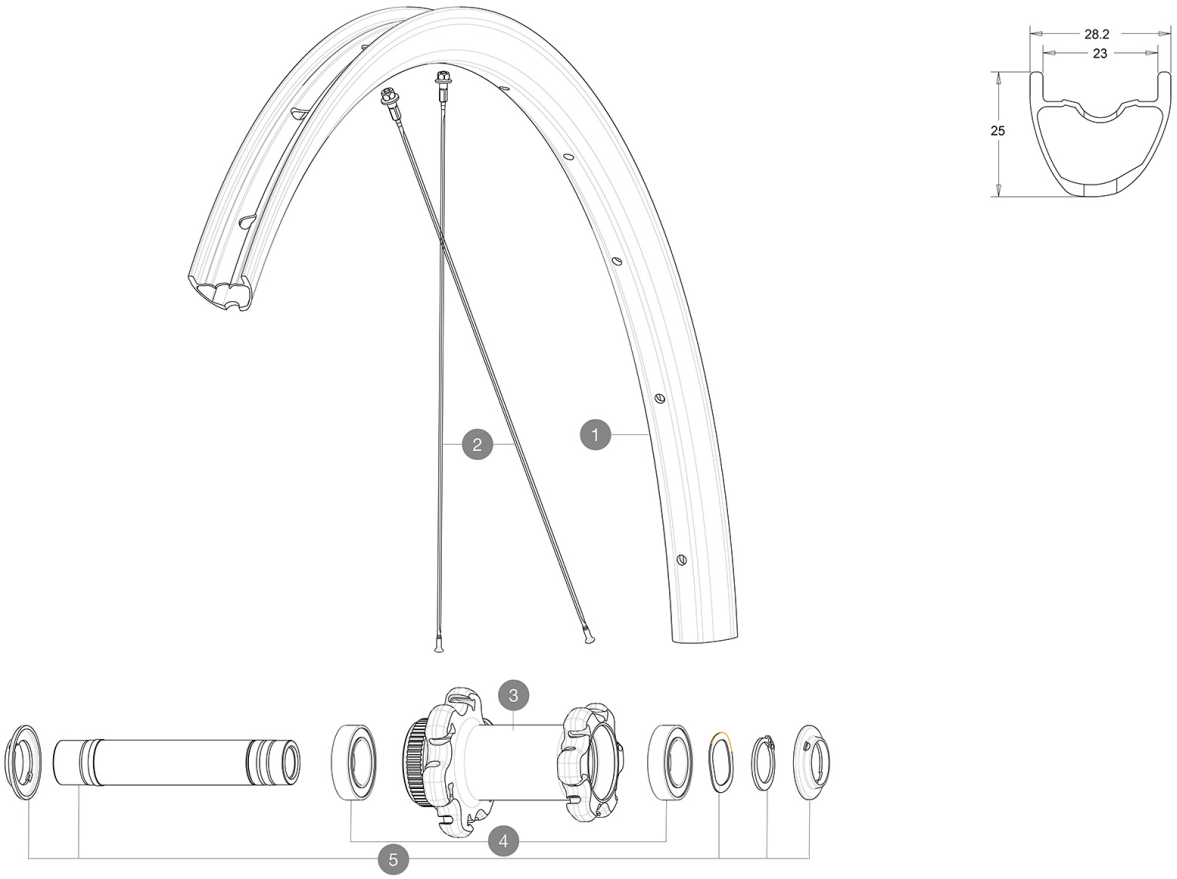


## RIMS

 :

| | | |
|---|---|---|
| 1 | V2738910 | KIT FRONT RIM ALLROAD PRO CARBON SL -while stock last |
| 1 | V4092410 | Kit Front rim EBM Allroad Pro Carbon SL while stock lasts |
| | V2620101 | UST RIM TAPE 25mm (for 21-24mm wide rim) |

## SPOKES

| | | |
|---|---|---|
| 2 | V3668301 | Kit 2 FRONT/NDS Allroad Pro Carbon SL stamped spoke 291 + al |
| 2 | V3821801 | KIT 12 FRT/REAR CROSSMAX PRO CARBON 29'' EXTRA FLAT SPOKE 29 |

## HUB SHELLS

| | | |
|---|---|---|
| 3 | N/A | HUB BODY |
| 4 | V2500901 | KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP |
| 5 | V2374101 | KIT QRM AUTO FRONT L3 AXLE 100x12mm DCL - while stock last |
| 5 | V2374001 | KIT 12x100mm FRONT AXLE DCL QRM AUTO ALLROAD > 2019 |

## OPTIONS

| | | |
|---|---|---|
| | V2372301 | KIT 100mm AXLE QRM AUTO MTB > 2019 |
| | V2373501 | QRM Auto front axle 15mm for DCL Allroad wheels > 2019 |

## ADAPTERS

| | | |
|---|---|---|
| | V2680301 | "Kit Ft Road Adapter 12 >> 9mm" |
| | V2372501 | 15mm MTB Axle Cap QRM Auto From 2019 |

Download date: 2026-09-08 / Update date: 2024-02-15

# MAVIC ALLROAD PRO CARBON SL DISC



## DELIVERED WITH

| | |
|---|---|
| Mavic tyre sealant (rear wheel) (355 466 01) | |
| Tyre sealant syringe | |
| Front QR adapters (996 941 01 for MTB or B41 043 01 for road) | |
| Rear QR adapters for Instant Drive 360 (B49 894 01) | |
| UST valve and accessories (129 838 01) | |
| UST valve and accessories (129 838 01) | |
| Pre-installed tubeless rim tape | |
| User guide | |
| User guide | |

## COMPATIBILITY

| | |
|---|---|
| Freewheel: Shimano/Sram, convertible to Campagnolo and XD-R with optional driver bodies | |
| Freewheel: Shimano/Sram, convertible to Campagnolo and XD-R with optional driver bodies | |
| Front axle: 12mm thru axle, easily convertible to quick release with included adapters. Convertible to 15mm with complete axle replacement | |
| Front axle: 12mm thru axle, easily convertible to quick release with included adapters. Convertible to 15mm with complete axle replacement | |
| Rear axle: 12mm thru axle, convertible to Quick Release with optional adapters and axle replacement | |
| Rear axle: 12mm thru axle, convertible to Quick Release with included adapters | |

## Specifications

### RIMS

- **Material :** 100% Unidirectional carbon fiber
- **Material :** 100% Unidirectional carbon fiber
- **Height :** 25mm
- **Height :** 25mm
- **Drilling :** traditional
- **Drilling :** traditional

Disc brake specific profile
Disc brake specific profile

- **Valve hole diameter :** 6.5 mm
- **Valve hole diameter :** 6.5 mm
- **Tire :** UST Tubeless and tubetype
- **Tire :** UST Tubeless and tubetype
- **Internal width :** 23 mm
- **Internal width :** 23 mm
- **ETRTO size :** 622x23TSS Road
- **ETRTO size :** 622x23TSS Road

Hookless profile
Hookless profile
Use with Mavic Tubeless Tape
Use with Mavic Tubeless Tape
UST Tubeless Ready
UST Tubeless Ready

### SPOKES

- **Material :** steel
- **Material :** steel
- **Shape :** straight pull, flat, double butted
- **Shape :** straight pull, flat, double butted
- **Nipples :** aluminum, ABS
- **Nipples :** aluminum, ABS
- **Count :** 24 front and rear
- **Count :** 24 front and rear
- **Lacing :** front crossed 2, rear Isopulse
- **Lacing :** front crossed 2, rear Isopulse

Isopulse
Isopulse

### WHEEL HUB

- **Front and rear bodies :** aluminum
- **Axle material :** aluminum

Instant Drive 360
QRM Auto

- **Front :** Quick release, 12x100 and 15x100 through axle compatible
- **Front and rear bodies :** aluminum
- **Rear :** Quick Release, 12x142 and 12x135 compatible
- **Axle material :** aluminum

Hub available for Center Lock brake rotors only

- **Front :** Quick release, 12x100 and 15x100 through axle compatible
- **Rear :** Quick Release, 12x142 and 12x135 compatible

Instant Drive 360
QRM Auto

### VERSIONS

- **Color :** Black only
- **Color :** Black only
- **Disc standard :** Center Lock (R) only
- **Disc standard :** Center Lock (R) only
- **Freewheel :** Shimano/Sram

### WHEEL WEIGHTS

670

Download date: 2026-09-08 / Update date: 2024-02-15