

2021 REAR

Maximum tyre pressure: 4.4bar/64PSI with a 28mm tyre - 2.6bar/38PSI with a 64mm tyre

ASTM CATEGORY 2 : road and offroad with jumps less than 15cm

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesnn't exceed 120kg, bike included

Maximum tyre pressure: 6.75bar/97PSI with a 23mm tyre - 3.8bar/55PSI with a 62mm tyre


Recommended tyre sizes: 25 to 32 mm

Max. Pressure: see indication on wheel and tyre. If they differ, use the lowest of the 2

Maximum tyre size: width 62mm - pressure max. 3.8Bar/55PSI

REFERENCES WHEELS

R36761 KSYRIUM S CL 700 12x142 M11 R39021 KSYRIUM S CL 700 12x142 XDR

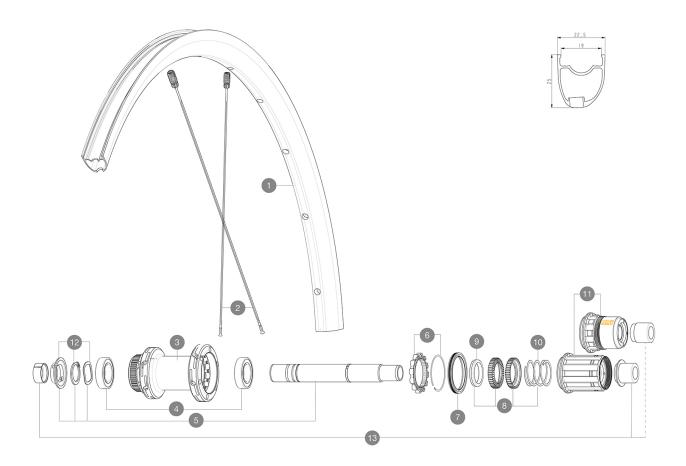

RIMS



:

1 V4093313 Kit Rear rim Ksyrium S Disc

SPOKES

2 V4163501 Kit 12 Front/Rear Ksyrium S Disc butted spoke 294mm M7/7

HUB SHELLS

HUB BODY		
HUB BEARINGS 17x30x7 6903 x 2		
KIT ID360 135/142 DCL L1 AXLE WITH CLIP		
KIT ID360 INSERT SHAPED EAR LOBE > 2017		
Kit ID360 seal version 2 (larger)		
KIT ID360 2 RATCHETS + SPRING + GREASE		
KIT ID360 3 PADS NOISE REDUCING		
KIT 3 ID360 ROAD SPRINGS		
HG11 Freewheel Body ID360		
FREEHUB BODY XD Road ID360		
KIT ADJUST. SYSTEM QRM AUTO ID360 for 17x30x7 bearing		
KIT ID360 2 RATCHETS + SPRING + GREASE KIT ID360 3 PADS NOISE REDUCING KIT 3 ID360 ROAD SPRINGS HG11 Freewheel Body ID360 FREEHUB BODY XD Road ID360		

ADAPTERS

13	V2510701	ID360V2RrAxleAdapt12x142/148
	V2510901	ID360 EVO RrAxleAdpt12x135/150
	V2510801	ID360 V2 RrAxleAdapt9x135

MAVIC KSYRIUM S DISC

DELIVERED WITH

Mavic tyre sealant (rear wheel) (355 466 01) Front QR adapters (996 941 01 for MTB or B41 043 01 for road) Front QR adapters (996 941 01 for MTB or B41 043 01 for road) Front QR adapters (996 941 01 for MTB or B41 043 01 for road) Rear QR adapters for Instant Drive 360 (B49 894 01) Rear QR adapters for Instant Drive 360 (B49 894 01) Rear QR adapters for Instant Drive 360 (B49 894 01) UST valve and accessories (129 838 01) UST valve and accessories (129 838 01) UST valve and accessories (129 838 01) Multifonction adjustment wrench (delivered with rear wheel) (325 423 01) User guide User guide User guide

COMPATIRII ITY

CUMPATIBILITY	
Freewheel: Shimano/Sram, convertible to Campagnolo and XD-R with optional driver bodies	
Freewheel: Shimano/Sram, convertible to Campagnolo and XD-R with optional driver bodies	
Front axle: 12x100 thru axle, easily convertible to quick release with included adapters. Not compatible with 15mm through axles.	
Front axle: 12x100 thru axle, easily convertible to quick release with included adapters. Not compatible with 15mm through axles.	
Rear axle: 12mm thru axle, convertible to Quick Release with included adapters	
Rear axle: 12mm thru axle, convertible to Quick Release with included adapters	
Freewheel body: convertible SRAM XD road (kit V2580101 sold separately)	
Freewheel body: convertible SHIMANO HG light road (kit V3850101 sold separately)	
Freewheel body: convertible SHIMANO MS (kit V3990101 sold separately)	
Freewheel body: convertible CAMPAGNOLO ED (kit V3440101 sold separately)	
Front axle: 12x100 thru axle, easily convertible to quick release with included adapters. Not compatible with 15mm through axles.	
Front axle: convertible from 15mm thru axle to Quick Release with adapters (delivered with non- boost wheel)	
FTS-L Shimano / Sram freewheel body ([30871101] - Delivered on the wheel)	
ID360 Sram XD freewheel body ([V3740101])	
Rear axle: for fixing nuts only (included), M9x1 thread	
ID360 Shimano Micro Spline alloy freewheel body ([V3990101])	

Specifications

RIMS

- Material : Maxtal

Downle Material 20 Maxtal-06 / Update date: 2024-04-10

- Material : Maxtal

Infinity Hub

 $\blacksquare \textbf{Body}: \text{ aluminum}$

 ${\color{red} \bullet} \, \text{Front and rear bodies}: \text{ aluminum}$

WHEEL WEIGHTS

920