

ASTM CATEGORY 3 : CROSS COUNTRY



For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 150kg, bike included

Recommended tyre sizes: 50mm to 76mm (2.0" to 3.0")

RUEDAS REFERENCIAS

F90422 Xmax SL Ulti 25 29 DCL Ft Bst*

F92242 Xmax SL Ulti25 29 INTL Ft Bst*

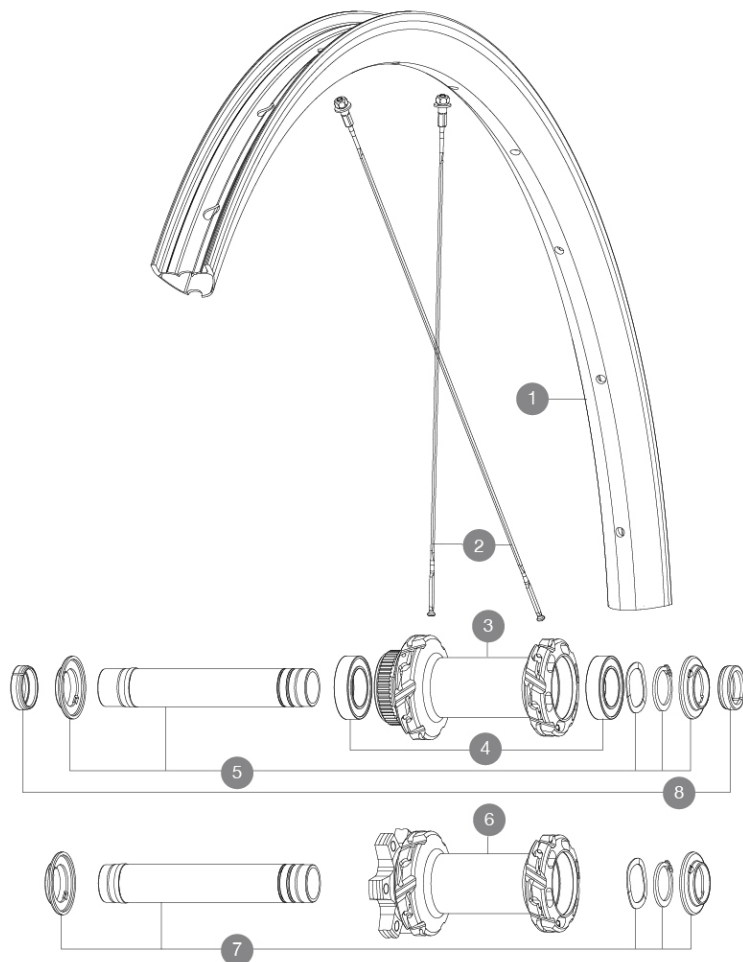

RIMS



&NBSP;:

1	V2700101	UST Tape 28mm for 25 to 27mm wide rims
1	V3766615	Kit Front/Rear rim Crossmax SL Ultimate 25 -while stock last
	V00004831	Kit Front/Rear rim Crossmax SL Ultimate 29" 22

SPOKES

2	V00065231	Kit 12 Front/Rear Crossmax SL Ultimate 29" butted stainless
2	V2389101	Kit 12Fr/Rr XmaxSL Ultimate spk293+np&w while stock last

HUB SHELLS

3	N/A	CUERPO DE BUJE
4	V2500901	KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP
5	V2375601	Kit 110mm axle QRM auto MTB from 2019 DCL
6	N/A	CUERPO DE BUJE
7	V2372401	KIT 110mm AXLE QRM AUTO MTB > 2019

OPTIONS

V2374401	TORQUE CAPS 15*31 Adapter MTB QRM Auto > 2019 Frt HUB
----------	---

ADAPTERS

8	V2372501	KIT FT MTB FORKREST FROM 2019
	99694101	2 REDUCERS 15/9mm



Crossmax SL Ultimate 25 29

ENTREGADO CON

UST valve and accessories (129 838 01)	
Pre-installed tubeless rim tape	
Multifunction adjustment wrench (delivered with rear wheel) (325 423 01)	
Wheelbag (V24 801 01)	
2 replacement spokes with each wheel	

COMPATIBILITY

Freewheel: Shimano HG9, XD or Micro Spline	
Rear axle: 12x148 Boost thru axle	
Front axle: 15x110 Boost thru axle	

Specifications

LLANTAS

- **Material** : 100% carbon fiber
 - **Drilling** : traditional
 - **Internal width** : 25 mm
 - **ETRTO size 29"** : 622x25TSS
- Hookless profile
Asymmetrical rim design
Adaptive Layup Carbon technology
UST Tubeless Ready
- #### RADIOS
- **Material** : steel
 - **Shape** : straight pull, flat, double butted
 - **Nipples** : aluminum, ABS
 - **Count** : 24 front and rear
 - **Lacing** : front and rear crossed 2, contactless

BUJE DE LA RUEDA

- Infinity Hub
24 teeth ratchet
Hub available with 6-bolt or center lock (R) brake rotors
- **Axles** : Front 15X110 Boost ; Rear 12X148 Boost
- Instant Drive 360
QRM Auto
- #### VERSIONS
- **Disc standard** : 6 Bolts or Center Lock (R)
 - **Hub width** : Boost only (front 110, rear 148)
 - **Freewheel** : SRAM XD, Shimano HG9, Shimano Micro-Spline

PESOS DE RUEDAS

605