

### ASTM CATEGORY 4 : ENDURO AND TRAIL RIDING

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 150kg, bike included

Maximum tyre pressure: 2.95bar/43PSI with a 52mm tyre - 1.55bar/22PSI with a 125mm tyre


Minimum tyre size: width 52mm - pressure max. 2.95Bar/43PSI

Recommended tyre sizes: 60mm to 76mm (2.35" to 3.0")

### REFERENCES WHEELS

R37083 XMAX XLS INT 29 BST HG  
R37773 XMAX XLS INT 29 BST XD

R39163 XMAX XLS CL 29 BST MS

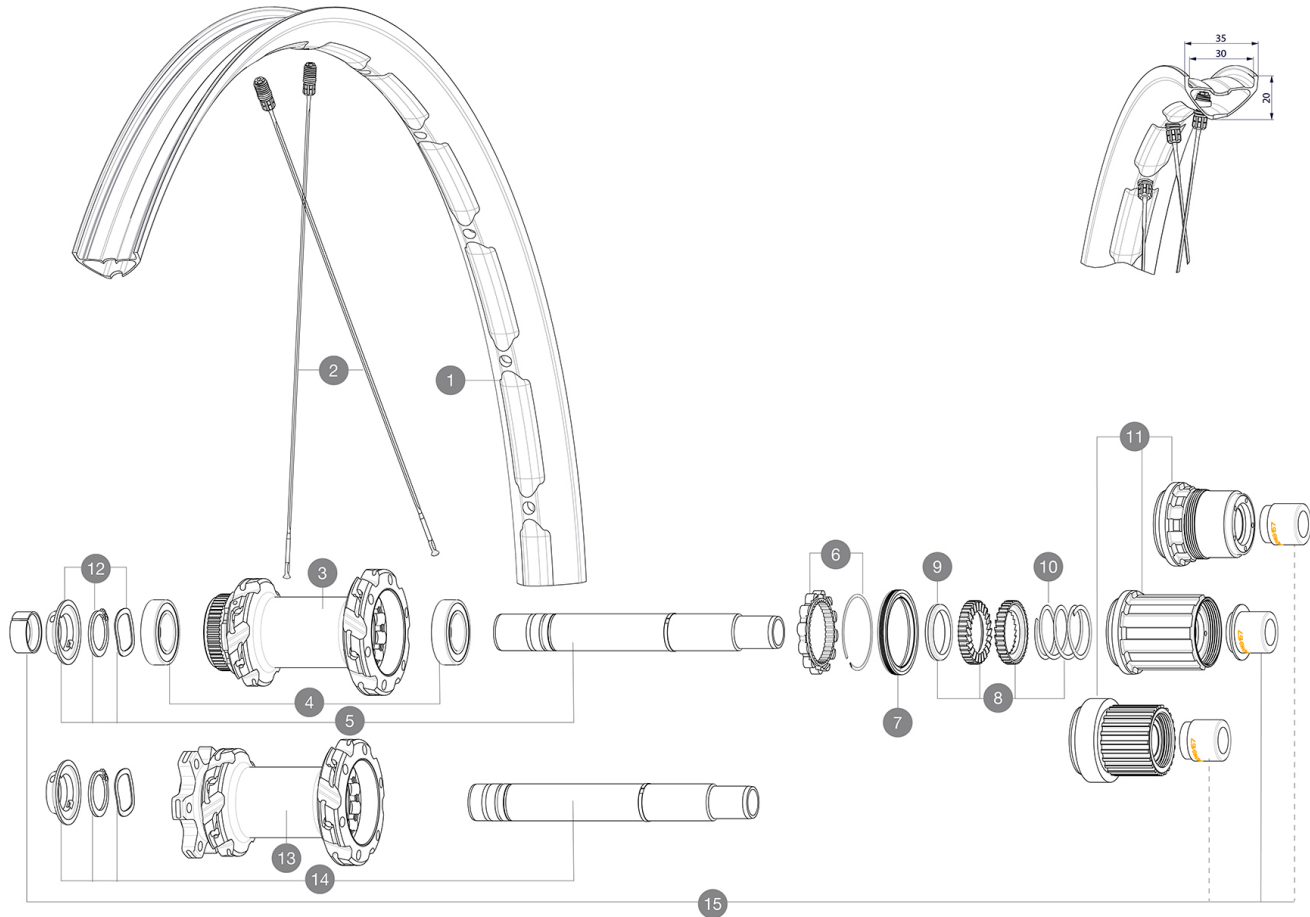

### RIMS



&NBSP::

1 V3765915 Kit Front/Rear rim Crossmax XLS 29"

### SPOKES

2 V2388301 Kit 12 Front/Rear Crossmax SL/SLS/XL/XLS 29" butted spoke 2

### HUB SHELLS

|    |           |                                                            |
|----|-----------|------------------------------------------------------------|
| 3  | N/A       | HUB BODY                                                   |
| 4  | M40076    | HUB BEARINGS 17x30x7 6903 x 2                              |
| 5  | V2375701  | Kit ID360 148 DCL axle with circlip                        |
| 6  | V2252701  | KIT ID360 INSERT SHAPED EAR LOBE > 2017                    |
| 7  | V00063631 | Kit ID360 seal version 2 (larger)                          |
| 8  | V2375201  | KIT ID360 24 TEETH 2 RATCHET + MTB SPRING + PAD (specific) |
| 9  | V2375401  | KIT ID360 MTB 24T 3 NOISE REDUCING PADS                    |
| 10 | V2372901  | KIT 3 ID360 MTB SPRINGS                                    |
| 11 | V3990101  | MicroSpline MTB Freewheel Body ID360                       |
| 11 | V3780101  | HG9 Alloy MTB Freewheel Body ID360                         |
| 11 | V3740101  | XD MTB Freewheel Body ID360                                |
| 12 | V2373001  | KIT ADJUST. SYSTEM QRM AUTO ID360 for 17x30x7 bearing      |
| 13 | N/A       | HUB BODY                                                   |
| 14 | V2372201  | KIT ID360 148 D6T AXLE WITH CLIP                           |

### OPTIONS

8 V2372801 KIT ID360 2x40 TEETH RATCHETS + MTB SPRING + GREASE + PAD

### ADAPTERS

15 V2510701 ID360V2RrAxleAdapt12x142/148  
V2510801 ID360 V2 RrAxleAdapt9x135



# CROSSMAX XL S 29

### DELIVERED WITH

|                                                                             |  |
|-----------------------------------------------------------------------------|--|
| UST valve and accessories<br>(129 838 01)                                   |  |
| UST valve and accessories<br>(129 838 01)                                   |  |
| UST valve and accessories<br>(129 838 01)                                   |  |
| Multifunction adjustment wrench (delivered with rear wheel)<br>(325 423 01) |  |
| Multifunction adjustment wrench (delivered with rear wheel)<br>(325 423 01) |  |
| Multifunction adjustment wrench (delivered with rear wheel)<br>(325 423 01) |  |
| User guide                                                                  |  |
| 2 replacement spokes with each wheel                                        |  |
| 2 replacement spokes with each wheel                                        |  |
| 2 replacement spokes with each wheel                                        |  |
| Fore adjustment wrench                                                      |  |
| Fore adjustment wrench                                                      |  |

### COMPATIBILITY

|                                                                                                             |  |
|-------------------------------------------------------------------------------------------------------------|--|
| Freewheel body: convertible SHIMANO HG MTB steel (kit V3790101 sold separately)                             |  |
| Rear axle adapters: 12x148 convertible to 9x141 (kit V2510801 sold separately)                              |  |
| Freewheel: Shimano HG9, XD or Micro Spline                                                                  |  |
| Freewheel: Shimano HG9, XD or Micro Spline                                                                  |  |
| Rear axle: 12x148 Boost thru axle                                                                           |  |
| Rear axle: 12x148 Boost thru axle                                                                           |  |
| Front axle: 15x110 Boost thru axle                                                                          |  |
| Front axle: 15x110 Boost thru axle                                                                          |  |
| Front axle: convertible from 15mm thru axle to Quick Release with adapters (delivered with non-boost wheel) |  |
| Front axle: for fixing nuts only (included), M9x1 thread                                                    |  |

## Specifications

### RIMS

- **Material** : Mxstal
- **Material** : Mxstal
- **Material** : Mxstal
- **Material** : S6000 Aluminum
- **Material** : S6000 Aluminum
- **Height** : 22 mm
- SUP
- SUP
- **Internal width** : 30 mm
- **Weight reduction** : ISM
- **Weight reduction** : ISM
- Fore
- **Tire** : UST Tubeless and tubetype
- **Tire** : UST Tubeless and tubetype
- **Internal width** : 30 mm
- **Internal width** : 30 mm
- Disc brake specific profile
- Asymmetrical rim design
- **ETRTO size 29"** : 622x30TC
- Black Shield treatment (protects your rim against impacts and scratches)
- **ETRTO size 29"** : 622x30TC
- **ETRTO size 29"** : 622x30TC
- Asymmetrical rim design

### WHEEL HUB

- Infinity Hub
- **Body** : aluminum
- Instant Drive 360
- QRM Auto
- **Axles** : Front 15X110 Boost ; Rear 12X148 Boost
- Hub available with 6-bolt or center lock (R) brake rotors
- **Body design** : INFINITY
  - **Disc standard** : 6 Bolts or Center Lock
  - **Axle material** : aluminum
  - **Rear body** : aluminum
  - **Axles** : Front 15X110 (Boost) or 15x100 ; Rear 12X148 (Boost) or 12x142
  - **Freewheel** : Shimano HG MTB / Shimano MS / Sram XD MTB
  - **Freewheel** : FTS-L steel
- Infinity Hub
- 24 teeth ratchet
- Hub available with 6-bolt or center lock (R) brake rotors
- **Axles** : Front 15X110 Boost ; Rear 12X148 Boost
- Instant Drive 360
- QRM Auto

### VERSIONS

### WHEEL WEIGHTS

960