

#### ASTM CATEGORY 4 : ENDURO AND TRAIL RIDING

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 150kg, bike included

Recommended tyre sizes: 60mm to 76mm (2.35" to 3.0")


Maximum tyre pressure: 2.95bar/43PSI with a 52mm tyre - 1.55bar/22PSI with a 125mm tyre

Mindestgröße des Reifens: Breite 52mm - max. Druck 2.95Bar/43PSI

#### REFERENZEN RÄDER

F90512 XMAX XL INT 29 BST

F91982 XMAX XL CL 29 BST

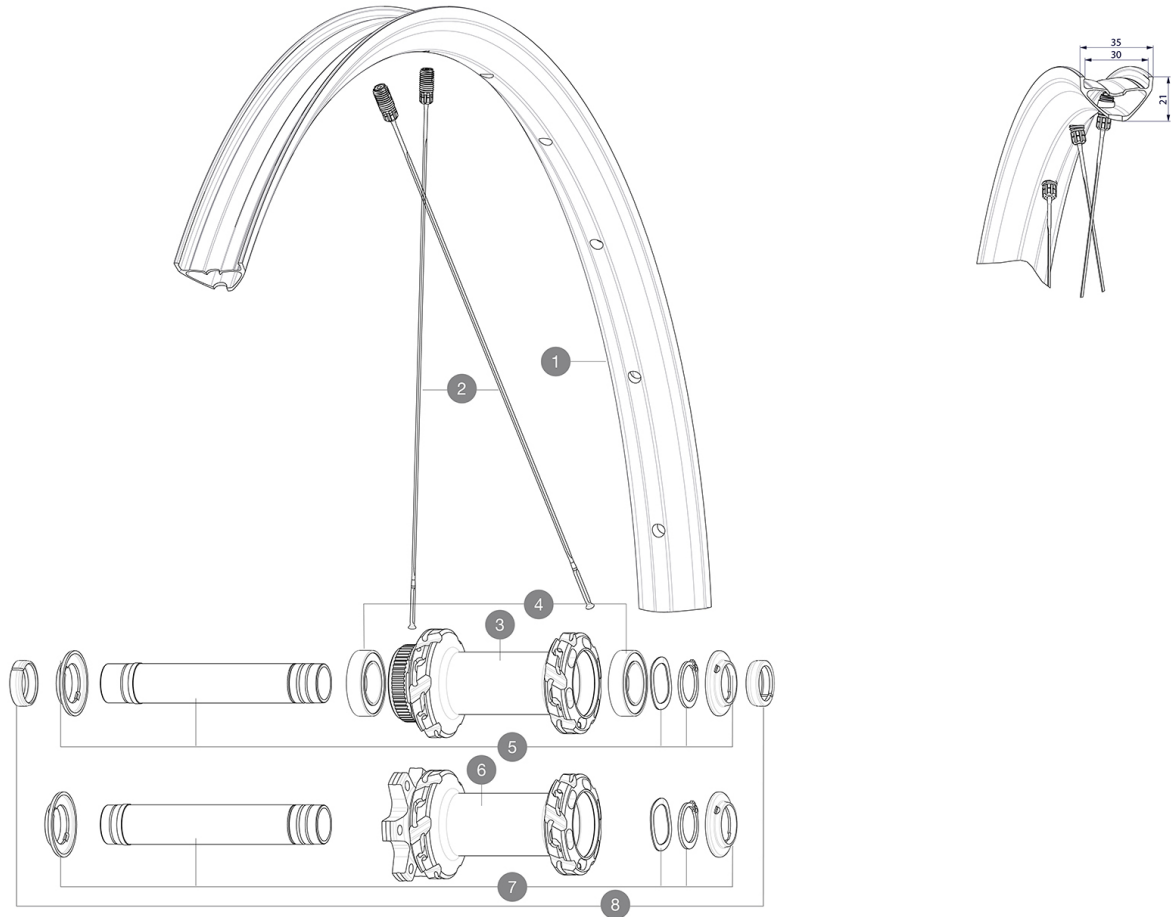

#### RIMS



&amp;NBSP;;

1 V3766015 Kit Front/Rear rim Crossmax XL 29" MY21

#### SPOKES

2 V2388301 Kit 12 Front/Rear Crossmax SL/SLS/XL/XLS 29" butted spoke 2

#### HUB SHELLS

|   |          |                                            |
|---|----------|--------------------------------------------|
| 3 | N/A      | NABENKÖRPER                                |
| 4 | V2500901 | KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP |
| 5 | V2375601 | Kit 110mm axle QRM auto MTB from 2019 DCL  |
| 6 | N/A      | NABENKÖRPER                                |
| 7 | V2372401 | KIT 110mm AXLE QRM AUTO MTB > 2019         |

#### OPTIONS

V2374401 TORQUE CAPS 15\*31 Adapter MTB QRM Auto &gt; 2019 Frt HUB

#### ADAPTERS

|   |          |                                      |
|---|----------|--------------------------------------|
| 8 | V2372501 | 15mm MTB Axle Cap QRM Auto From 2019 |
|   | 99694101 | 2 REDUCERS 15/9mm                    |

GELIEFERT MIT

|                                                                             |  |
|-----------------------------------------------------------------------------|--|
| 2 replacement spokes with each wheel                                        |  |
| UST valve and accessories<br>(129 838 01)                                   |  |
| UST valve and accessories<br>(129 838 01)                                   |  |
| UST valve and accessories<br>(129 838 01)                                   |  |
| UST valve and accessories<br>(129 838 01)                                   |  |
| Multifunction adjustment wrench (delivered with rear wheel)<br>(325 423 01) |  |
| Multifunction adjustment wrench (delivered with rear wheel)<br>(325 423 01) |  |
| Multifunction adjustment wrench (delivered with rear wheel)<br>(325 423 01) |  |
| Multifunction adjustment wrench (delivered with rear wheel)<br>(325 423 01) |  |
| Bedienungsanleitung                                                         |  |
| 2 replacement spokes with each wheel                                        |  |
| 2 replacement spokes with each wheel                                        |  |
| 2 replacement spokes with each wheel                                        |  |
| Fore adjustment wrench                                                      |  |
| Fore adjustment wrench                                                      |  |

COMPATIBILITY

|                                                                                                             |  |
|-------------------------------------------------------------------------------------------------------------|--|
| Freewheel: Shimano HG9, XD or Micro Spline                                                                  |  |
| Front axle: 15x110 Boost thru axle                                                                          |  |
| Rear axle: 12x148 Boost thru axle                                                                           |  |
| Freilaufkörper: SHIMANO HG MTB Stahl-konverter<br>(Kit V3790101 separat erhältlich)                         |  |
| Adapter Hinterachse: 12x148 umwandelbar in 9x141 (Kit V2510801 separat erhältlich)                          |  |
| Rear axle: 12x148 Boost thru axle                                                                           |  |
| Front axle: 15x110 Boost thru axle                                                                          |  |
| Front axle: 15x110 Boost thru axle                                                                          |  |
| Freewheel: Shimano HG9, XD or Micro Spline                                                                  |  |
| Freewheel: Shimano HG9, XD or Micro Spline                                                                  |  |
| Rear axle: 12x148 Boost thru axle                                                                           |  |
| Front axle: convertible from 15mm thru axle to Quick Release with adapters (delivered with non-boost wheel) |  |
| VR-Achse: nur für Schraubmuttern (im Lieferumfang enthalten), M10x1-Gewinde                                 |  |

Specifications

FELGEN

- Material : S6000 Aluminum
- Material : Maxtal
- Material : Maxtal
- Material : Maxtal
- Material : Maxtal
- Material : S6000 Aluminum
- Material : S6000 Aluminum
- Tire : UST Tubeless and tubetype
- Internal width : 30 mm
- ETRTO size 29" : 622x30TC

RADNABE

- Körpermaterial : aluminium
- Infinity Hub
- Körperdesign : INFINITY
- Axles : Front 15X110 Boost ; Rear 12X148 Boost
- Standard Disc : 6 Löcher oder Center Lock®
- Hub available with 6-bolt or center lock (R) brake rotors
- Material der Achse : Aluminium
- Achsgrößen : vorne 15x110 / hinten 12x148
- Freilauftechnologie : Instant Drive 360

RADGEWICHTE

900