

# MAVIC E-DEEMAX S 35 27.5

1  
2021  
FRONT

ASTM CATEGORY 5 : GRAVITY RIDING FOCUSED ON THE DESCENT

Maximum tyre pressure: 2.55bar/37PSI with a 54mm tyre - 1.3bar/19PSI with a 125mm tyre

Recommended tyre sizes: 65mm to 81mm (2.5" to 3.2")

Maximum tyre size: width 64mm - pressure max. 1.3Bar/19PSI


For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 180kg, Ebike included

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 180kg, E-bike included

## REFERENCES WHEELS

F91583 E-DEEMAX S35 INT 27,5 BST

F91593 E-DEEMAX S35 CL 27,5 BST

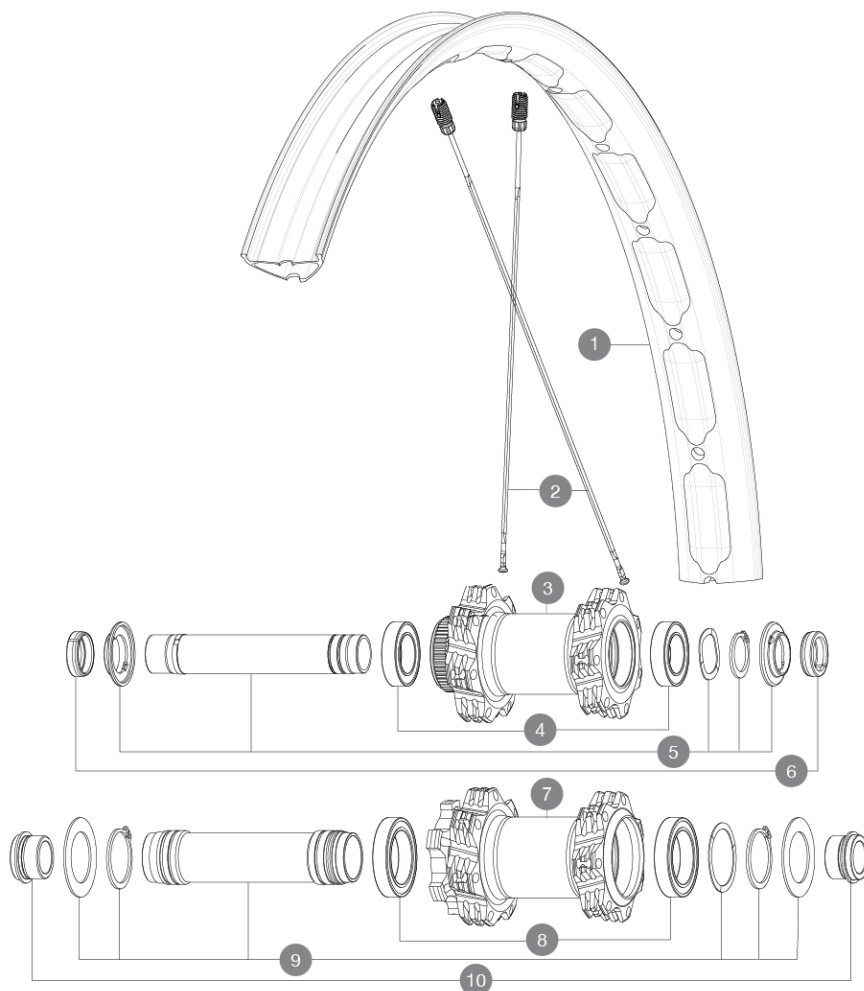

## RIMS



&NBSP::

1 V3766515 Kit Front/Rear rim eDeemax S 27,5

## SPOKES

2 V2388801 Kit 14Ft eDeemaxS 27,5" btd spk287 M7/7

## HUB SHELLS

|   |          |                                             |
|---|----------|---------------------------------------------|
| 3 | N/A      | HUB BODY                                    |
| 4 | V2500901 | KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP  |
| 5 | V2375601 | Kit 110mm axle QRM auto MTB from 2019 DCL   |
| 7 | N/A      | HUB BODY                                    |
| 8 | M40179   | FRONT BEARING 25x37x7 20mm AXLE             |
| 9 | V2373701 | KIT 20x110mm BOOST AXLE QRM AUTO MTB > 2019 |

## OPTIONS

|          |                                                       |
|----------|-------------------------------------------------------|
| V2650401 | TORQUECAP20*31 FT QRM AUTO MTB                        |
| V2374401 | TORQUE CAPS 15*31 Adapter MTB QRM Auto > 2019 Frt HUB |

## ADAPTERS

|          |                                       |                               |
|----------|---------------------------------------|-------------------------------|
| 6        | V2372501                              | KIT FT MTB FORKREST FROM 2019 |
| 10       | 12982801                              | ADAPTER Ft 20 to 15mm         |
| V2680401 | 20x110 BOOST Front Adapter MTB wheels |                               |
| 99694101 | ADAPTER Ft 15 to 9mm QR               |                               |

MAVIC

E-DEEMAX S 35 27.5

DELIVERED WITH

|                                                                             |  |
|-----------------------------------------------------------------------------|--|
| UST valve and accessories<br>(129 838 01)                                   |  |
| UST valve and accessories<br>(129 838 01)                                   |  |
| UST valve and accessories<br>(129 838 01)                                   |  |
| Multifunction adjustment wrench (delivered with rear wheel)<br>(325 423 01) |  |
| Multifunction adjustment wrench (delivered with rear wheel)<br>(325 423 01) |  |
| Multifunction adjustment wrench (delivered with rear wheel)<br>(325 423 01) |  |
| User guide                                                                  |  |
| 2 replacement spokes with each wheel                                        |  |
| 2 replacement spokes with each wheel                                        |  |
| 2 replacement spokes with each wheel                                        |  |
| Fore adjustment wrench                                                      |  |
| Fore adjustment wrench                                                      |  |

COMPATIBILITY

|                                                                                                                |  |
|----------------------------------------------------------------------------------------------------------------|--|
| Front axle: 15x110 Boost, convertible to 20x110<br>Boost thru axle with adapters                               |  |
| Front axle: 15x110 Boost, convertible to 20x110<br>Boost thru axle with adapters                               |  |
| Rear axle adapters: 12x148 convertible to 9x141<br>(kit V2510801 sold separately)                              |  |
| Rear axle: 12x148 Boost thru axle                                                                              |  |
| Rear axle: 12x148 Boost thru axle                                                                              |  |
| INT 6-bolt disc version front wheel convertible to<br>20x110 Boost thru axle with optional adapters            |  |
| Freewheel: Shimano HG9, XD or Micro Spline                                                                     |  |
| Freewheel: Shimano HG9, XD or Micro Spline                                                                     |  |
| Rear axle: Quick Release only                                                                                  |  |
| Front axle: convertible from 15mm thru axle to<br>Quick Release with adapters (delivered with non-boost wheel) |  |
| Front axle: for fixing nuts only (included), M9x1<br>thread                                                    |  |

Specifications

RIMS

- **Material** : Mxtal
- **Material** : Mxtal
- **Material** : Mxtal
- **Material** : S6000 Aluminum
- **Material** : S6000 Aluminum
- **Height** : 22 mm
- SUP
- SUP
- **Internal width** : 35 mm
- **Weight reduction** : ISM
- **Weight reduction** : ISM
- E-Bike specific rim profile
- E-Bike specific rim profile
- **Drilling** : Fore tapeless tubeless technology (front/rear 28 holes)
- **Tire** : UST Tubeless and tubetype
- **Tire** : UST Tubeless and tubetype
- Disc brake specific profile
- **Internal width** : 35 mm
- **Internal width** : 35 mm
- Asymmetrical rim design
- **ETRTO size 27.5"** : 584x35TC
- **ETRTO size 27.5"** : 584x35TC
- **ETRTO size 27.5"** : 584x35TC

WHEEL HUB

- **Body** : aluminum
- Instant Drive 360
- QRM Auto
- Hub available with 6-bolt or center lock (R) brake rotors
- **Axles** : Front 15X110 Boost ; Rear 12X148 Boost
- **Disc standard** : 6 Bolts or Center Lock
- **Axle material** : aluminum
- **Rear body** : aluminum
- **Axles** : Front 15X110 (Boost) or 15x100 ; Rear 12X148 (Boost) or 12x142
- **Freewheel** : Shimano HG MTB / Shimano MS / Sram XD MTB
- **Freewheel** : FTS-L steel
- Hub available with 6-bolt or center lock (R) brake rotors
- **Axles** : Front 15X110 Boost ; Rear 12X148 Boost
- 24 teeth ratchet
- Instant Drive 360
- QRM Auto

VERSIONS

- **Disc standard** : 6 Bolts or Center Lock (R)
- **Disc standard** : 6 Bolts or Center Lock (R)
- **Hub width** : Boost only (front 110, rear 148)

WHEEL WEIGHTS

940