

MAVIC E-DEEMAX S 35 27.5


1
2021
FRONT

ASTM CATEGORY 5 : GRAVITY RIDING FOCUSED ON THE DESCENT
Para una mayor duraci3n de la rueda, Mavic recomienda que el peso total soportado por las ruedas no supere los 180kg, E-bike incluida
Recommended tyre sizes: 65mm to 81mm (2.5" to 3.2")
Maximum tyre pressure: 2.55bar/37PSI with a 54mm tyre - 1.3bar/19PSI with a 125mm tyre
Tamao m3ximo del neum3tico: anchura 64 mm - presi3n m3x. 1,3 bares/19 psi
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 180kg, Ebike included

RUEDAS REFERENCIAS

F91583 E-DEEMAX S35 INT 27,5 BST

F91593 E-DEEMAX S35 CL 27,5 BST

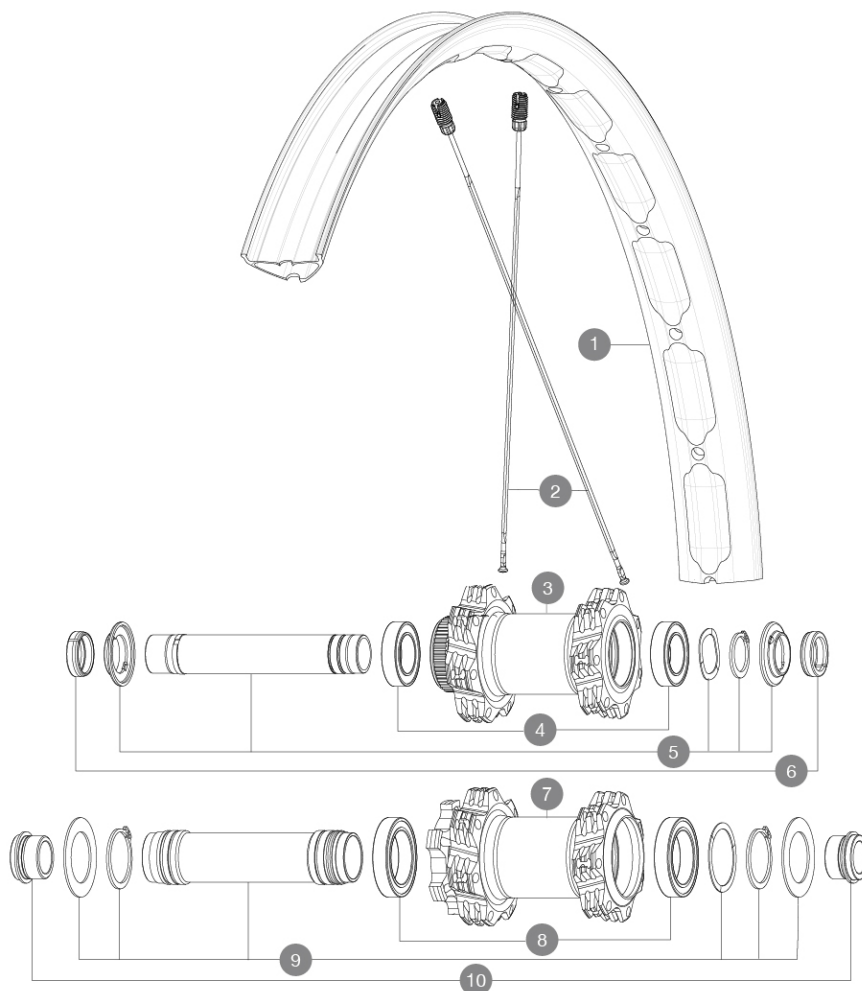

RIMS



&NBSP::

1 V3766515 Kit Front/Rear rim eDeemax S 27,5

SPOKES

2 V2388801 Kit 14Ft eDeemaxS 27,5" btd spk287 M7/7

HUB SHELLS

3	N/A	CUERPO DE BUJE
4	V2500901	KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP
5	V2375601	Kit 110mm axle QRM auto MTB from 2019 DCL
7	N/A	CUERPO DE BUJE
8	M40179	FRONT BEARING 25x37x7 20mm AXLE
9	V2373701	KIT 20x110mm BOOST AXLE QRM AUTO MTB > 2019

OPTIONS

V2650401	TORQUECAP20*31 FT QRM AUTO MTB
V2374401	TORQUE CAPS 15*31 Adapter MTB QRM Auto > 2019 Frt HUB

ADAPTERS

6	V2372501	KIT FT MTB FORKREST FROM 2019
10	12982801	15mm ADAPTER KIT - 2012 WHEELS
	V2680401	20x110 BOOST Front Adapter MTB wheels
	99694101	2 REDUCERS 15/9mm

MAVIC

E-DEEMAX S 35 27.5

2021

FRONT

ENTREGADO CON

2 replacement spokes with each wheel	
UST valve and accessories (129 838 01)	
UST valve and accessories (129 838 01)	
UST valve and accessories (129 838 01)	
UST valve and accessories (129 838 01)	
Multifunction adjustment wrench (delivered with rear wheel) (325 423 01)	
Multifunction adjustment wrench (delivered with rear wheel) (325 423 01)	
Multifunction adjustment wrench (delivered with rear wheel) (325 423 01)	
Multifunction adjustment wrench (delivered with rear wheel) (325 423 01)	
Guía del usuario	
2 replacement spokes with each wheel	
2 replacement spokes with each wheel	
2 replacement spokes with each wheel	
Fore adjustment wrench	
Fore adjustment wrench	

COMPATIBILITY

Freewheel: Shimano HG9, XD or Micro Spline	
Eje delantero: de 15Å mm, convertible a eje pasante de 20Å mm con los adaptadores incluidos	
Eje delantero: de 15Å mm, convertible a eje pasante de 20Å mm con los adaptadores incluidos	
Rear axle: 12x148 Boost thru axle	
Eje delantero: de 15Å mm, convertible a eje pasante de 20Å mm con los adaptadores incluidos	
Adaptadores eje trasero: 12x148 convertible a 9x141 (kit V2510801 vendido por separado)	
Freewheel: Shimano HG9, XD or Micro Spline	
Freewheel: Shimano HG9, XD or Micro Spline	
Rear axle: 12x148 Boost thru axle	
Rear axle: 12x148 Boost thru axle	
Versi3n de disco de 6Å tornillos INT de rueda delantera convertible a eje pasante 20x110 Boost mediante adaptadores opcionales	
Eje delantero: solo para tuercas de fijaci3n (incluidas), rosca M9x1	
Eje trasero: solo cierre r3pido	
Front axle: convertible from 15mm thru axle to Quick Release with adapters (delivered with non-boost wheel)	

Specifications

LLANTAS

- **Material** : Mxtal
- **Material** : S6000 Aluminum
- **Material** : Mxtal
- **Weight reduction** : ISM
- E-Bike specific rim profile
- **Material** : Mxtal
- **Material** : Mxtal
- **Tire** : UST Tubeless and tubetype
- **Material** : S6000 Aluminum
- **Material** : S6000 Aluminum

BUJE DE LA RUEDA

- **Material del cuerpo** : aluminio
- **Axles** : Front 15X110 Boost ; Rear 12X148 Boost
- **Disco est3NDAR** : s3lo 6 orificios o Center Lock
- Hub available with 6-bolt or center lock (R) brake rotors
- **Material del eje** : aluminio
- **Tama3o del eje** : delantero 15x110 / trasero 12x148
- **Tecnolog3a de rueda libre** : Instant Drive 360
- **Rueda libre** : Shimano HG MTR / Shimano MS /

PESOS DE RUEDAS

940