

MAVIC E-DEEMAX S 35 27.5

1
2021
REAR

ASTM CATEGORY 5 : GRAVITY RIDING FOCUSED ON THE DESCENT

Per una maggiore durata della ruota, Mavic raccomanda che il peso totale sostenuto dalle ruote della bici non superi i 180kg, E-bike inclusa

Recommended tyre sizes: 65mm to 81mm (2.5" to 3.2")


Maximum tyre pressure: 2.55bar/37PSI with a 54mm tyre - 1.3bar/19PSI with a 125mm tyre

Misura massima del pneumatico: larghezza 64 mm - pressione massima 1,3 Bar/19 PSI

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 180kg, Ebike included

REFERENZE RUOTE

R38263	E-DEEMAX S35 INT 27,5 BST XD	R39282	E-DEEMAX S35 INT 27,5 BST HG
R38273	E-DEEMAX S35 CL 27,5 BST MS		

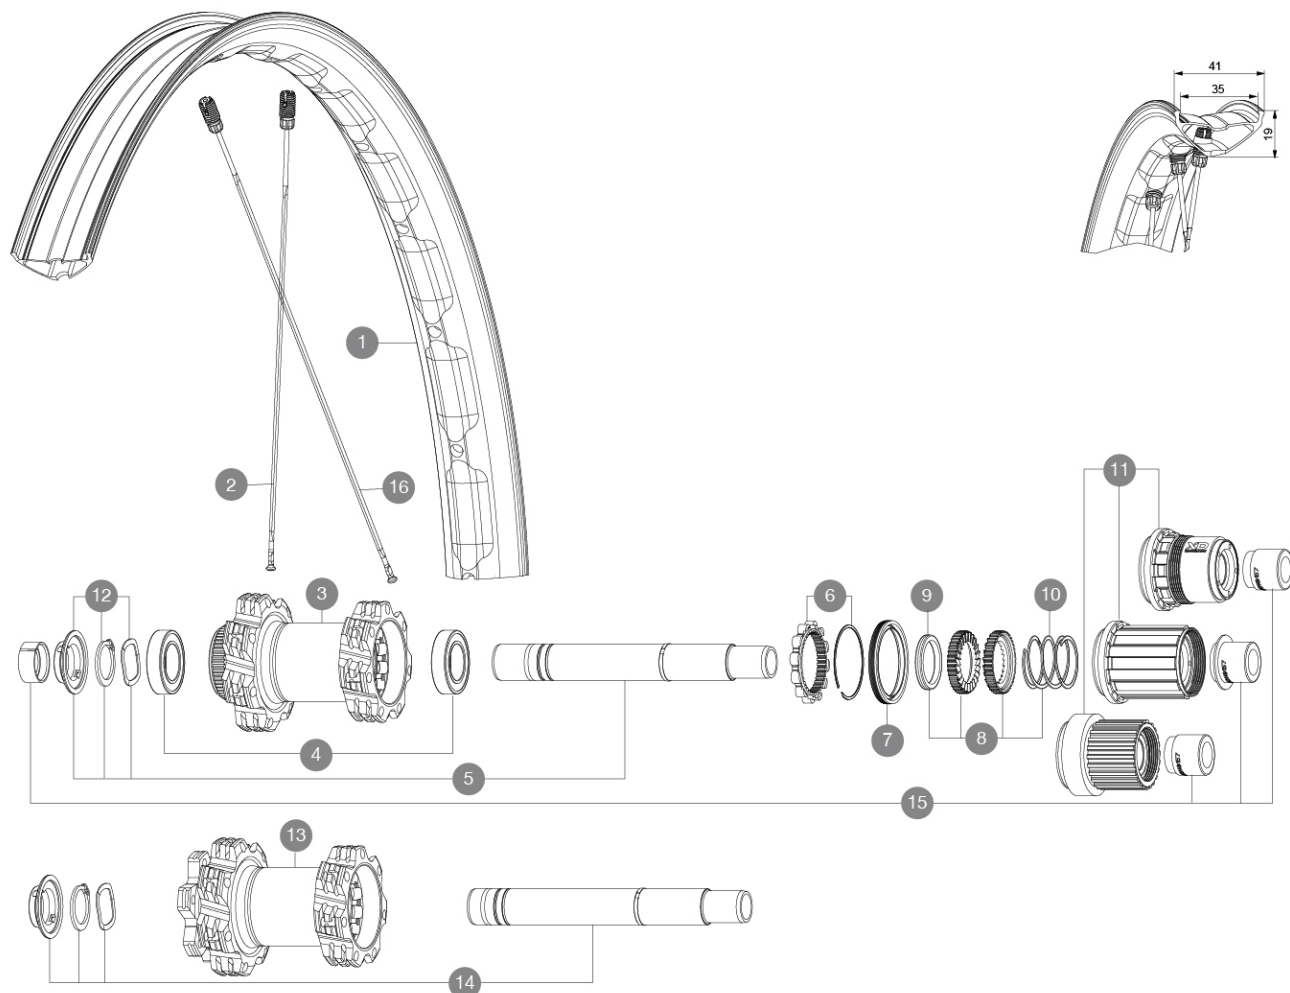

RIMS



&NBSP::

1	V3766515	Kit Front/Rear rim eDeemax S 27,5
---	----------	-----------------------------------

SPOKES

2	V2388901	Kit 14Rr NDS eDeemaxS 27,5" btd spk287M7
16	V2389001	Kit 14Rr DS eDeemaxS 27,5" btd spk285M7

HUB SHELLS

3	N/A	CORPO MOZZO
4	M40076	HUB BEARINGS 17x30x7 6903 x 2
5	V2375701	Kit ID360 148 DCL axle with circlip
6	V2252701	KIT ID360 INSERT SHAPED EAR LOBE > 2017
7	V00063631	Kit ID360 seal version 2 (larger)
8	V2375201	KIT ID360 24 TEETH 2 RATCHET + MTB SPRING + PAD (specific)
9	V2375401	KIT ID360 MTB 24T 3 NOISE REDUCING PADS
10	V2372901	KIT 3 ID360 MTB SPRINGS
11	V3990101	MicroSpline MTB Freewheel Body ID360
11	V3780101	HG9 Alloy MTB Freewheel Body ID360

11	V3740101	XD MTB Freewheel Body ID360
12	V2373001	KIT ADJUST. SYSTEM QRM AUTO ID360 for 17x30x7 bearing
13	N/A	CORPO MOZZO
14	V2372201	KIT ID360 148 D6T AXLE WITH CLIP

OPTIONS

V2372801	KIT ID360 2x40 TEETH RATCHETS + MTB SPRING + GREASE + PAD
----------	---

ADAPTERS

15	V2510701	ID360 EVO REAR AXLE ADAPTERS 12x142mm DCL & D6T
	V2510801	ID360 EVO REAR AXLE ADAPTERS 9x135mm DCL & D6T

MAVIC

E-DEEMAX S 35 27.5

2021

REAR

VENDUTO CON

2 replacement spokes with each wheel	
UST valve and accessories (129 838 01)	
UST valve and accessories (129 838 01)	
UST valve and accessories (129 838 01)	
UST valve and accessories (129 838 01)	
Multifunction adjustment wrench (delivered with rear wheel) (325 423 01)	
Multifunction adjustment wrench (delivered with rear wheel) (325 423 01)	
Multifunction adjustment wrench (delivered with rear wheel) (325 423 01)	
Multifunction adjustment wrench (delivered with rear wheel) (325 423 01)	
Guida utente	
2 replacement spokes with each wheel	
Fore adjustment wrench	
Fore adjustment wrench	
2 replacement spokes with each wheel	
2 replacement spokes with each wheel	

COMPATIBILITY

Freewheel: Shimano HG9, XD or Micro Spline	
Perno anteriore: 15x110 Boost, convertibile in un perno passante da 20x110 Boost con adattatori	
Perno anteriore: 15x110 Boost, convertibile in un perno passante da 20x110 Boost con adattatori	
Rear axle: 12x148 Boost thru axle	
Perno anteriore: 15x110 Boost, convertibile in un perno passante da 20x110 Boost con adattatori	
Adattatori asse posteriore: 12x148 convertibile in 9x141 (kit V2510801 venduto separatamente)	
Ruota anteriore con disco a 6 bulloni INT convertibile in perno passante da 20 x 110 Boost con adattatori opzionali	
Freewheel: Shimano HG9, XD or Micro Spline	
Freewheel: Shimano HG9, XD or Micro Spline	
Rear axle: 12x148 Boost thru axle	
Rear axle: 12x148 Boost thru axle	
Front axle: convertible from 15mm thru axle to Quick Release with adapters (delivered with non-boost wheel)	
Perno anteriore: solo per i dadi di fissaggio (inclusi), filettatura M9x1	
Perno posteriore: solo bloccaggio rapido	

Specifications

CERCHIONI

- **Material** : Mxtral
- **Material** : S6000 Aluminum
- **Material** : Mxtral
- **Weight reduction** : ISM
- E-Bike specific rim profile
- **Material** : Mxtral
- **Material** : Mxtral
- **Material** : S6000 Aluminum
- **Tire** : UST Tubeless and tubetype
- **Material** : S6000 Aluminum

MOZZO

- **Materiale del corpo** : alluminio
- **Axles** : Front 15X110 Boost ; Rear 12X148 Boost
- **Disco standard** : solo 6 fori o Center Lock
- Hub available with 6-bolt or center lock (R) brake rotors
- **Materiale dell'asse** : alluminio
- **Dimensioni dell'asse** : anteriore 15x110 / posteriore 12x148
- **Tecnologia ruota libera** : Instant Drive 360
- **Ruota libera** : Shimano HG MTB / Shimano MS /

PESI RUOTE

1090