


MAVIC E-DEEMAX S 30 29

1
2021
FRONT

ASTM CATEGORY 5 : GRAVITY RIDING FOCUSED ON THE DESCENT
Um eine längere Lebensdauer der Laufräder zu erzielen, empfiehlt Mavic als Obergrenze f¼r das Gesamtgewicht von Fahrer, Ausr¼stung und Fahrrad/E-B
Recommended tyre sizes: 60mm to 76mm (2.35" to 3.0")
Maximum tyre pressure: 2.95bar/43PSI with a 52mm tyre - 1.55bar/22PSI with a 125mm tyre
Mindestgr¼¼e des Reifens: Breite 52mm - max. Druck 2.95Bar/43PSI
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 180kg, Ebike included

REFERENZEN RÄDER

F91623	E-DEEMAX S 30 INT 29 BST	F91633	E-DEEMAX S 30 CL 29 BST
--------	--------------------------	--------	-------------------------

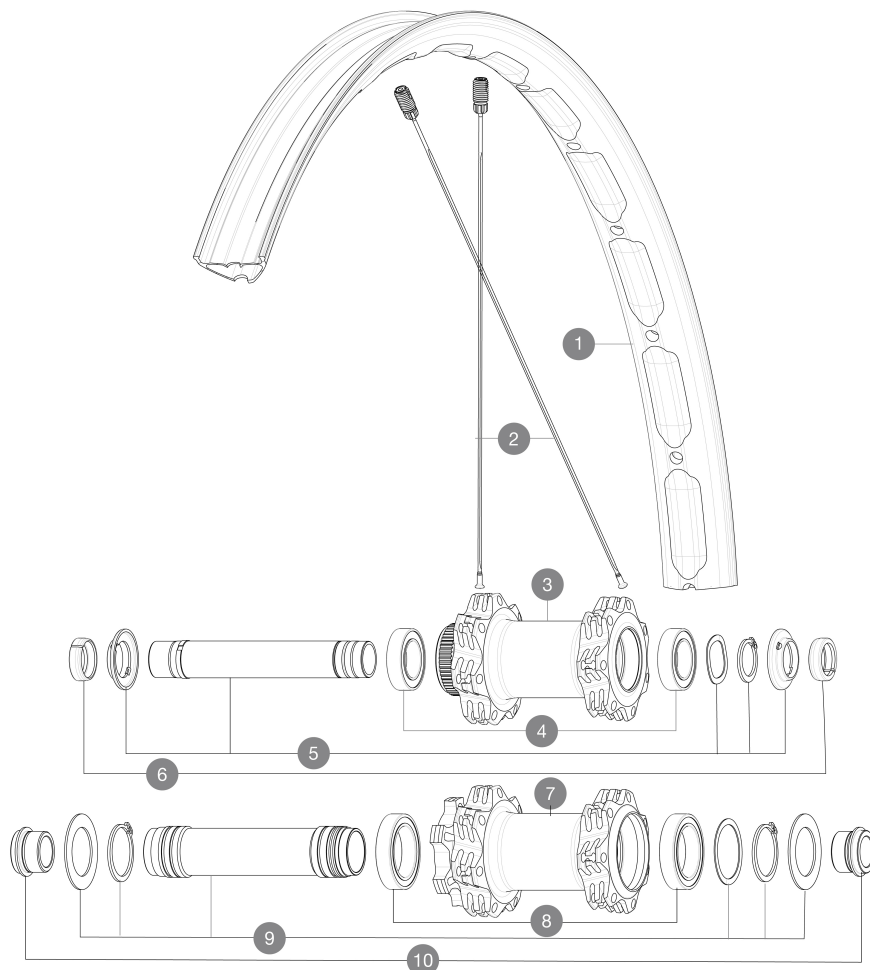

RIMS



&NBSP::

- | | | |
|---|----------|--|
| 1 | V3766415 | Kit Front/Rear rim eDeemax S 29 |
| | V3750101 | 35mm UST Green Tape for 30mm wide rims |

SPOKES

- | | | |
|---|----------|--|
| 2 | V2388501 | Kit 14 Front eDeemax S 29" butted spoke 306 M7/7 |
|---|----------|--|

HUB SHELLS

- | | | |
|---|----------|---|
| 3 | N/A | NABENKÖRPER |
| 4 | V2500901 | KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP |
| 5 | V2375601 | Kit 110mm axle QRM auto MTB from 2019 DCL |
| 7 | N/A | NABENKÖRPER |
| 8 | M40179 | FRONT BEARING 25x37x7 20mm AXLE |
| 9 | V2373701 | KIT 20x110mm BOOST AXLE QRM AUTO MTB > 2019 |

OPTIONS

- | | |
|----------|---|
| V2650401 | TORQUECAP20*31 FT QRM AUTO MTB |
| V2374401 | TORQUE CAPS 15*31 Adapter MTB QRM Auto > 2019 Frt HUB |

ADAPTERS

- | | | |
|----|----------|---------------------------------------|
| 6 | V2372501 | 15mm MTB Axle Cap QRM Auto From 2019 |
| 10 | 12982801 | 15mm ADAPTER KIT - 2012 WHEELS |
| | V2680401 | 20x110 BOOST Front Adapter MTB wheels |
| | 99694101 | 2 REDUCERS 15/9mm |

GELIEFERT MIT

2 replacement spokes with each wheel	
UST valve and accessories (129 838 01)	
UST valve and accessories (129 838 01)	
UST valve and accessories (129 838 01)	
UST valve and accessories (129 838 01)	
Multifunction adjustment wrench (delivered with rear wheel) (325 423 01)	
Multifunction adjustment wrench (delivered with rear wheel) (325 423 01)	
Multifunction adjustment wrench (delivered with rear wheel) (325 423 01)	
Multifunction adjustment wrench (delivered with rear wheel) (325 423 01)	
Bedienungsanleitung	
2 replacement spokes with each wheel	
2 replacement spokes with each wheel	
Fore adjustment wrench	
Fore adjustment wrench	
2 replacement spokes with each wheel	

COMPATIBILITY

Freewheel: Shimano HG9, XD or Micro Spline	
VR-Achse: 15x100 mm, umr¼stbar auf 20x110 mm mit beiliegenden Adaptern	
VR-Achse: 15x100 mm, umr¼stbar auf 20x110 mm mit beiliegenden Adaptern	
Rear axle: 12x148 Boost thru axle	
VR-Achse: 15x100 mm, umr¼stbar auf 20x110 mm mit beiliegenden Adaptern	
Adapter Hinterachse: 12x148 umwandelbar in 9x141 (Kit V2510801 separat erhältlich)	
VR in 6-Loch-Disc-Version, mit optionalen Adaptern auf 20x110-mm-Steckachse (Boost) umr¼stbar	
Freewheel: Shimano HG9, XD or Micro Spline	
Freewheel: Shimano HG9, XD or Micro Spline	
Rear axle: 12x148 Boost thru axle	
Rear axle: 12x148 Boost thru axle	
Front axle: convertible from 15mm thru axle to Quick Release with adapters (delivered with non-boost wheel)	
VR-Achse: nur f¼r Schraubmuttern (im Lieferumfang enthalten), M10x1-Gewinde	

Specifications

FELGEN

- Material : Mxtral
- Material : S6000 Aluminum
- Material : Mxtral
- Weight reduction : ISM
- E-Bike specific rim profile
- Material : Mxtral
- Material : Mxtral
- Material : S6000 Aluminum
- Material : S6000 Aluminum
- Tire : UST Tubeless and tubeless

RADNABE

- K¼rpermaterial : aluminium
- Axles : Front 15X110 Boost ; Rear 12X148 Boost
- Standard Disc : 6 L¼cher oder Center Lock®
- Hub available with 6-bolt or center lock (R) brake rotors
- Material der Achse : Aluminium
- Achsgr¼Ùe : vorne 15x110 / hinten 12x148
- Freilauftechnologie : Instant Drive 360
- Freilauf : Shimano HG MTB / Shimano MS / Sram XD MTB

RADGEWICHTE

960