

ASTM CATEGORY 5 : GRAVITY RIDING FOCUSED ON THE DESCENT

Para una mayor duraci3n de la rueda, Mavic recomienda que el peso total soportado por las ruedas no supere los 180kg, E-bike incluida

Recommended tyre sizes: 60mm to 76mm (2.35" to 3.0")

Maximum tyre pressure: 2.95bar/43PSI with a 52mm tyre - 1.55bar/22PSI with a 125mm tyre


Tamao m3ximo del neum3tico: anchura 52 mm - presi3n m3x. 2,95 bar/43 psi

For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 180kg, Ebike included

RUEDAS REFERENCIAS

F91623 E-DEEMAX S 30 INT 29 BST

F91633 E-DEEMAX S 30 CL 29 BST

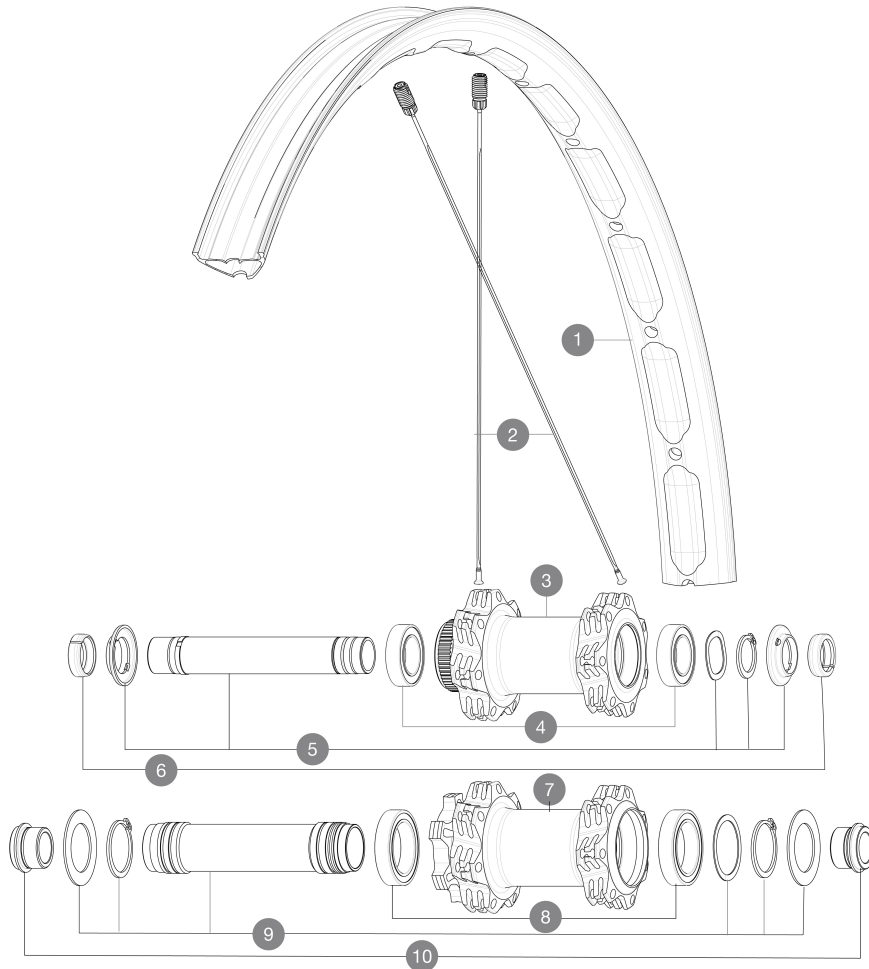

RIMS



&NBSP;:

1	V3766415	Kit Front/Rear rim eDeemax S 29
	V3750101	35mm UST Green Tape for 30mm wide rims

SPOKES

2	V2388501	Kit 14 Front eDeemax S 29" butted spoke 306 M7/7
---	----------	--

HUB SHELLS

3	N/A	CUERPO DE BUJE
4	V2500901	KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP
5	V2375601	Kit 110mm axle QRM auto MTB from 2019 DCL
7	N/A	CUERPO DE BUJE
8	M40179	FRONT BEARING 25x37x7 20mm AXLE
9	V2373701	KIT 20x110mm BOOST AXLE QRM AUTO MTB > 2019

OPTIONS

V2650401	TORQUECAP20*31 FT QRM AUTO MTB
V2374401	TORQUE CAPS 15*31 Adapter MTB QRM Auto > 2019 Frt HUB

ADAPTERS

6	V2372501	15mm MTB Axle Cap QRM Auto From 2019
10	12982801	15mm ADAPTER KIT - 2012 WHEELS
	V2680401	20x110 BOOST Front Adapter MTB wheels
	99694101	2 REDUCERS 15/9mm



E-DEEMAX S 30 29

ENTREGADO CON

2 replacement spokes with each wheel	
UST valve and accessories (129 838 01)	
UST valve and accessories (129 838 01)	
UST valve and accessories (129 838 01)	
UST valve and accessories (129 838 01)	
Multifunction adjustment wrench (delivered with rear wheel) (325 423 01)	
Multifunction adjustment wrench (delivered with rear wheel) (325 423 01)	
Multifunction adjustment wrench (delivered with rear wheel) (325 423 01)	
Multifunction adjustment wrench (delivered with rear wheel) (325 423 01)	
Guía del usuario	
2 replacement spokes with each wheel	
2 replacement spokes with each wheel	
Fore adjustment wrench	
Fore adjustment wrench	
2 replacement spokes with each wheel	

COMPATIBILITY

Freewheel: Shimano HG9, XD or Micro Spline	
Eje delantero: de 15Å mm, convertible a eje pasante de 20Å mm con los adaptadores incluidos	
Eje delantero: de 15Å mm, convertible a eje pasante de 20Å mm con los adaptadores incluidos	
Rear axle: 12x148 Boost thru axle	
Eje delantero: de 15Å mm, convertible a eje pasante de 20Å mm con los adaptadores incluidos	
Adaptadores eje trasero: 12x148 convertible a 9x141 (kit V2510801 vendido por separado)	
VersiÃ³n de disco de 6Å tornillos INT de rueda delantera convertible a eje pasante 20x110 Boost mediante adaptadores opcionales	
Freewheel: Shimano HG9, XD or Micro Spline	
Freewheel: Shimano HG9, XD or Micro Spline	
Rear axle: 12x148 Boost thru axle	
Rear axle: 12x148 Boost thru axle	
Front axle: convertible from 15mm thru axle to Quick Release with adapters (delivered with non-boost wheel)	
Eje delantero: solo para tuercas de fijaciÃ³n (incluidas), rosca M9x1	

Specifications

LLANTAS

- Material : Mxtral
- Material : S6000 Aluminum
- Material : Mxtral
- Weight reduction : ISM
- E-Bike specific rim profile
- Material : Mxtral
- Material : Mxtral
- Material : S6000 Aluminum
- Material : S6000 Aluminum
- Tire : UST Tubeless and tubeless

BUJE DE LA RUEDA

- Material del cuerpo : aluminio
- Axles : Front 15X110 Boost ; Rear 12X148 Boost
- Disco estÃ¡ndar : sÃ³lo 6 orificios o Center Lock
- Hub available with 6-bolt or center lock (R) brake rotors
- Material del eje : aluminio
- Tamaño del eje : delantero 15x110 / trasero 12x148
- Tecnología de rueda libre : Instant Drive 360
- Rueda libre : Shimano HG MTR / Shimano MS /

PESOS DE RUEDAS

960