




CROSSMAX XL R 29

ASTM E1064-18
Standard Test Method for Determining the Tensile Properties of Polymeric Materials
Maximum tyre pressure: 2.35bar/34PSI with a 52mm tyre - 1.25bar/18PSI with a 125mm tyre

参照ホイール

F92971	CROSSMAX XL R INT 29 BST	F92981	CROSSMAX XL R CL 29 BST
--------	--------------------------	--------	-------------------------

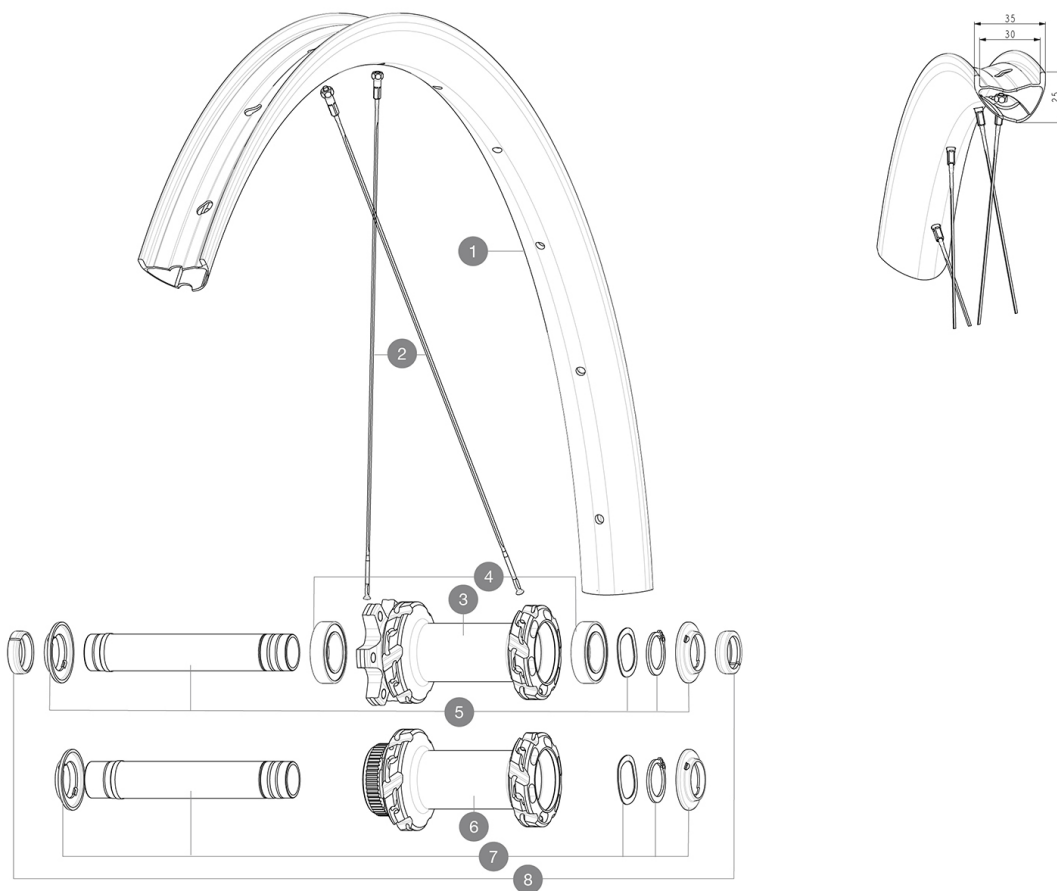

RIMS



&NBSP;::

1	V00004931	Kit Front/Rear rim Crossmax XLR 29"
	V3750101	35mm UST Green Tape for 30mm wide rims

SPOKES

2	V2389101	Kit 12Fr/Rr XmaxSL Ultimate spk293+np&w while stock last
2	V00065231	Kit 12 Front/Rear Crossmax SL Ultimate 29" butted stainless

HUB SHELLS

3	N/A	HUB BODY
4	V2500901	KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP
5	V2372401	KIT 110mm AXLE QRM AUTO MTB > 2019
6	N/A	HUB BODY
7	V2375601	Kit 110mm axle QRM auto MTB from 2019 DCL

OPTIONS

V2374401	TORQUE CAPS 15*31 Adapter MTB QRM Auto > 2019 Frt HUB
----------	---

ADAPTERS

8	V2372501	15mm MTB Axle Cap QRM Auto From 2019
	99694101	2 REDUCERS 15/9mm

付属品

à□□ā□□ā□ā□ā□¼ā□«ā□«ä°ā□□□ç□□ā□'ā□□ā□¼ā□ā□□2æ□¬ā»□ā±□	
USTā□□ā□«ā□□î¼□ā□çā□¬ā□»ā□μā□°ā□¼ (129 838 01)	
USTā□□ā□«ā□□î¼□ā□çā□¬ā□»ā□μā□°ā□¼ (129 838 01)	
USTā□□ā□«ā□□î¼□ā□çā□¬ā□»ā□μā□°ā□¼ (129 838 01)	
ā□□ā□¥ā□¼ā□□ā□¬ā□'ā□°ā□ā□□ā□¼ā□□è£ ç□□æ,□ā□¿	
ā□□ā□¥ā□¼ā□□ā□¬ā□'ā□°ā□ā□□ā□¼ā□□è£ ç□□æ,□ā□¿	
ā□□ā□¥ā□¼ā□□ā□¬ā□'ā□°ā□ā□□ā□¼ā□□è£ ç□□æ,□ā□¿	
ā□□æ©□è□¼è°¿æ□'ā□¬ā□°ā□□î¼□ā□°ā□çā□□ā□ā□¼ā□«ā□«ä»□ā±□î¼□ (325 423 01)	
ā□□æ©□è□¼è°¿æ□'ā□¬ā□°ā□□î¼□ā□°ā□çā□□ā□ā□¼ā□«ā□«ä»□ā±□î¼□ (325 423 01)	
ā□¼ā□¼ā□¶ā□¼ā□□ā□¬ā□ā□□	
ā□□ā□□ā□ā□¼ā□«ā□«ä°ā□□□ç□□ā□'ā□□ā□¼ā□ā□□2æ□¬ā»□ā±□	
ā□□ā□□ā□ā□¼ā□«ā□«ä°ā□□□ç□□ā□'ā□□ā□¼ā□ā□□2æ□¬ā»□ā±□	

COMPATIBILITY

ā□□ā□ā□'ā□□ā□ā□ā□'ā□«ī¼□ 15x110mm ā□□ā□¼ā□'ā□□ ā□'ā□«ā□¼ā□ā□ā□'ā□«	
ā□'ā□ā□ā□ā□ā□ā□'ā□«ī¼□12x148m m ā□□ā□¼ā□'ā□□ ā□'ā□«ā□¼ā□ā□ā□'ā□«	
ā□□ā□ā□ā□'ā□□ā□ā□ā□'ā□«ī¼□ 15x110mm ā□□ā□¼ā□'ā□□ ā□'ā□«ā□¼ā□ā□ā□'ā□«	
ā□□ā□'ā□¼ā□□ā□ā□ā□¼ā□«æ□ ā¼□ī¼□ā□'ā□'ā□'ā□□ā□¼ā□□ā□□ā □«ā□·ā□□ā□□HG MTBā□'ā□□ā□ ¼ā□«ī¼□ā□- ā□□ā□□V3790101ā□¥ā£ī¼□	
ā□'ā□ā□ā□ā□ā□ā□'ā□«ā□ā□ā□ā□ □ā□ā□¼ī¼□12x148ā□□9x141ā□« ā□□ā□□ī¼□ā□- ā□□ā□□V2510801ā□'ā□¥ā£ī¼□	
ā□'ā□ā□ā□ā□ā□ā□'ā□«ī¼□12x148m m ā□□ā□¼ā□'ā□□ ā□'ā□«ā□¼ā□ā□ā□'ā□«	
ā□□ā□ā□ā□'ā□□ā□ā□ā□'ā□«ī¼□ 15x110mm ā□□ā□¼ā□'ā□□ ā□'ā□«ā□¼ā□ā□ā□'ā□«	
ā□□ā□¼ā□'ā□□ā□ā□ā□'ā□«ī¼□ □15X110mmā□□12X148mm	
ā□□ā□¼ā□'ā□□ā□ā□ā□'ā□«ī¼□ □15X110mmā□□12X148mm	
ā□ā□ā□'ā□'ā□ā□'ā□□ā□□ā□□ā□ ā□□□360ā□□ā□'ā□¼ā□□ā□ā□ā□¼ ā□« ā□□ā□'ā□□ā□ā□, ā□¼ ā□□ā□□ā□□9A°ā□□ā□□ā□□ā□ □ā□□ā□□ā□§□□-æ□□ā□□ā□ é□ □ā□□ā□'è□¼ā□«ā□□ā□□ā□'é □□□□'ā□□è□ è»¼é□□ā□□ā□ā□ ā□'ā□ā□'ā□□ā□□ā□□ā□ā□ā□ 60 ā□□ā□'ā□¼ā□□ā□ā□ā□¼ā□«ā□ □é□□ā□¥è§¼¼ā□□ā□ā□ā□□ā□□ ā□□ā□¼ā□·ā□¼ā□«ā□§æ□□æ□ □□ā□□ā□□ā□□ā□¼ā□«æ□ □ā□ā□□ā□'ā□'ā□□ā□□- ā□ā□□ā□□ā□□ā□ ā°□ā□□ā□□□□'æ□§ā□□ā□□¼	
ā□□ā□ā□'ā□□ ā□ā□ā□'ā□'ā□«ī¼□ □ā□'ā□□□□'ā□□ā□□ā□□ā□□ā□ ā□'ā□«ā□□ī¼□ā□□M9x1ā□'ā□ ā□□ā□□	

Specifications

リム

[illegible]

ホイールハブ

[illegible]

ホイールの重み

735