


ASTM CATEGORY 2 : road and offroad with jumps less than 15cm  
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 120kg, bike included  
Maximum tyre pressure: 4.1bar/59PSI with a 28mm tyre - 2.45bar/36PSI with a 64mm tyre  
Recommended tire sizes: 28 to 64 mm (1.1" to 2.5")  
Max. Pressure: see indication on wheel and tire. If they differ, use the lowest of the 2

## REFERENCES WHEELS

|         |                      |        |                          |
|---------|----------------------|--------|--------------------------|
| F000040 | ALLROADINT650B12x100 | F92811 | ALLR 650B CL 650B 12X100 |
|---------|----------------------|--------|--------------------------|

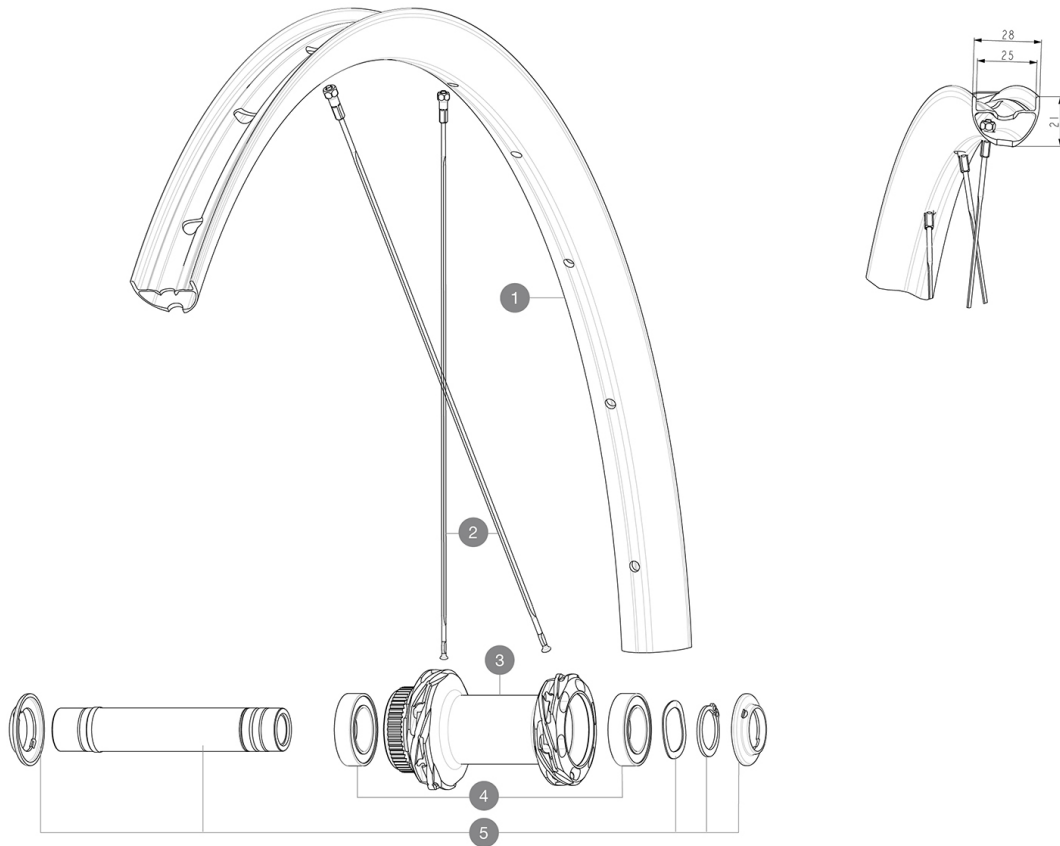

## RIMS



&NBSP;;

|   |          |                                        |
|---|----------|----------------------------------------|
| 1 | V4095115 | Kit Front/Rear rim Allroad 650B        |
|   | V2700101 | UST Tape 28mm for 25 to 27mm wide rims |

## SPOKES

|   |          |                                                              |
|---|----------|--------------------------------------------------------------|
| 2 | V4165001 | Kit 12 Front/Rear Allroad 650B flat spoke 277 + nipple black |
|---|----------|--------------------------------------------------------------|

## HUB SHELLS

|   |          |                                                     |
|---|----------|-----------------------------------------------------|
| 3 | N/A      | HUB BODY                                            |
| 4 | V2500901 | KIT BEARINGS 18x30x7 + WAVED WASHER + CLIP          |
| 5 | V2374001 | KIT 12x100mm FRONT AXLE DCL QRM AUTO ALLROAD > 2019 |

## OPTIONS

|          |                                                        |
|----------|--------------------------------------------------------|
| V2373501 | QRM Auto front axle 15mm for DCL Allroad wheels > 2019 |
|----------|--------------------------------------------------------|

## ADAPTERS

|          |                                      |
|----------|--------------------------------------|
| V2372501 | 15mm MTB Axle Cap QRM Auto From 2019 |
| V2680301 | "Kit Ft Road Adapter 12 >> 9mm"      |



# ALLROAD 650B DISC

2022  
FRONT

DELIVERED WITH

|                                           |  |
|-------------------------------------------|--|
| UST valve and accessories<br>(129 838 01) |  |
| UST valve and accessories<br>(129 838 01) |  |
| Pre-installed tubeless rim tape           |  |
| Pre-installed tubeless rim tape           |  |
| User guide                                |  |
| User guide                                |  |

COMPATIBILITY

|                                                                                                                                                                                                                                                      |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram, convertible to Campagnolo ED11, N3W and XD-R with optional driver bodies                                                                                                                                                    |  |
| Front axle: 12mm thru axle, easily convertible to quick release with optional adapters. Convertible to 15mm with complete axle replacement                                                                                                           |  |
| Freewheel body: convertible SRAM XD road (kit V2580101 sold separately)                                                                                                                                                                              |  |
| Freewheel body: convertible SHIMANO HG light road (kit V3850101 sold separately)                                                                                                                                                                     |  |
| Freewheel body: convertible SHIMANO MS (kit V3990101 sold separately)                                                                                                                                                                                |  |
| Front axle: 12mm thru axle, easily convertible to quick release with optional adapters. Convertible to 15mm with complete axle replacement                                                                                                           |  |
| Freewheel body: convertible CAMPAGNOLO N3W (kit V4270101 sold separately)                                                                                                                                                                            |  |
| ID360 Sram XD freewheel body (V3740101)                                                                                                                                                                                                              |  |
| Rear axle: for fixing nuts only (included), M9x1 thread                                                                                                                                                                                              |  |
| ID360 Shimano Micro Spline alloy freewheel body (V3990101)                                                                                                                                                                                           |  |
| Instant Drive 360 freewheel technology<br>The new Instant Drive 360 freewheel system is super light and fast to engage with only 9°. A large contactless rubber seal provides low friction, while a wide array of end caps makes it super versatile. |  |

Specifications

RIMS

- **Material** : S6000 Aluminum
- **Material** : S6000 Aluminum
- **Height** : 21 mm
- **Joint** : sleeved
- **Joint** : sleeved
- **Internal width** : 19 mm
- **Internal width** : 25 mm
- Disc brake specific profile
- **Valve hole diameter** : 6.5 mm
- **Tire** : UST Tubeless and tubetype
- **Drilling** : traditional
- **Internal width** : 25 mm
- Disc brake specific profile
- Hookless profile
- **ETRTO size 27.5"** : 584x25TSS
- **ETRTO size 27.5"** : 584x25TSS
- **Tire** : clincher

SPOKES

- **Material** : steel
- **Material** : steel
- **Shape** : straight pull, round
- **Nipples** : steel, ABS
- **Count** : 24 front and rear
- **Lacing** : front and rear crossed 2
- **Lacing** : front and rear crossed 2, contactless

WHEEL HUB

- **Body** : aluminum
- Infinity hubs
- **Front and rear bodies** : aluminum
- **Axle material** : aluminum
- Instant Drive 360 freewheel technology
- QRM Auto bearing preload technology
- **Front** : Quick release, 12x100 and 15x100 through axle compatible
- **Rear** : Quick Release, 12x142 and 12x135 compatible
- Hub available for Center Lock brake rotors only
- **Body design** : INFINITY
- **Disc standard** : Center Lock® only
- **Axle material** : aluminum
- **Axle size** : front 12x100 / rear 12x142 - Convertible to quick release with included adapters
- **Axles** : Front 15x110 (Boost) or 15x100 ; Rear 12x148 (Boost) or 12x142
- **Freewheel** : Shimano HG road
- **Freewheel** : FTS-L steel

VERSIONS

- **Color** : Black only
- **Disc standard** : Center Lock® only
- **Freewheel** : Shimano/Sram

WHEEL WEIGHTS

860