

ASTM CATEGORY 1 : road only


For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included

Recommended tyre sizes: 25 to 32 mm

Max. Pressure tubeless: 25mm 6 bars - 87 PSI, 28mm 5 bars - 70 PSI. Max pressure tubetype: 25mm 7 bars - 102 PSI, 28mm 6 bars - 87 PSI

## REFERENCES WHEELS

F85731 Cosmic Pro Carb UST TDF Ft

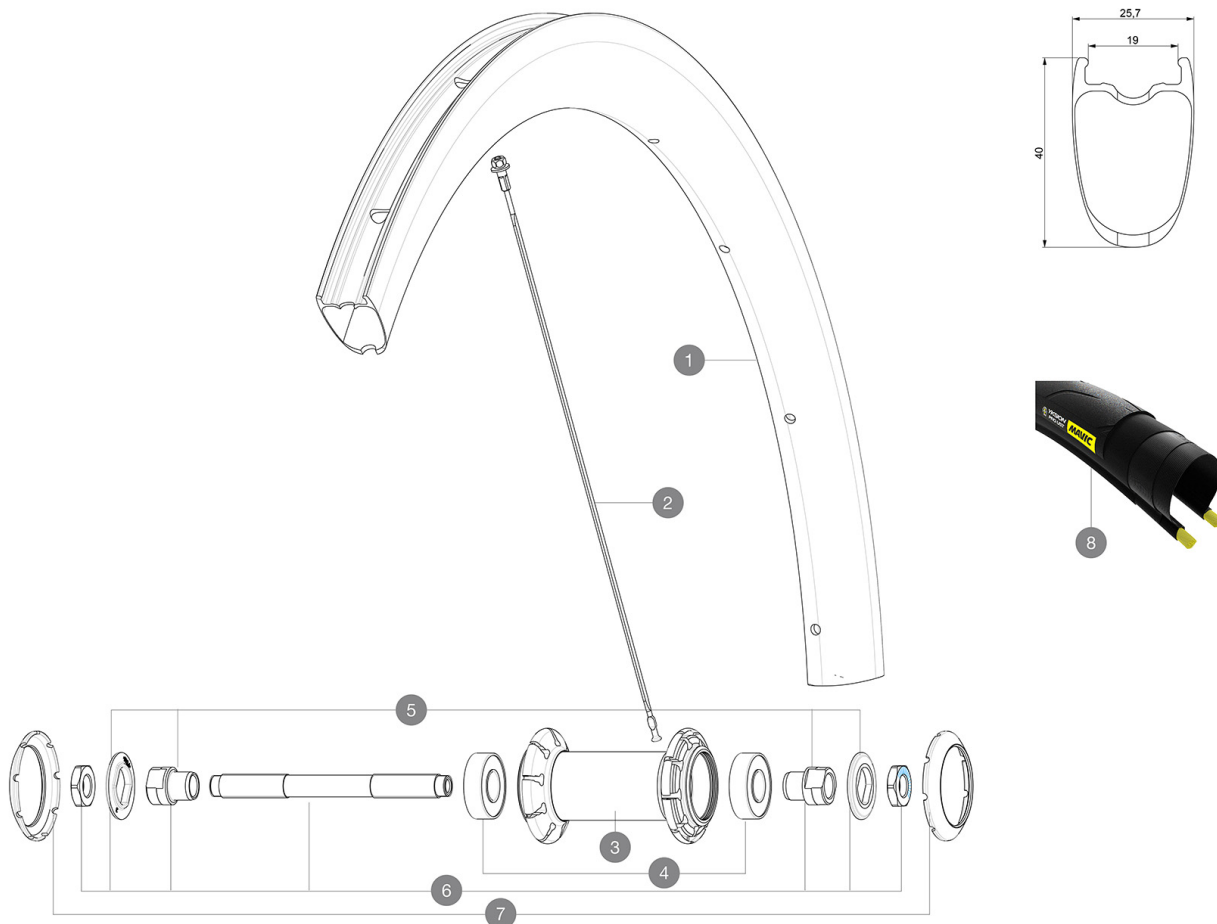

## RIMS



&NBSP;:

|   |          |                                         |
|---|----------|-----------------------------------------|
| 1 | V2734610 | KIT FRONT RIM COSMIC PRO CARBON UST TdF |
|   | V3720101 | 25mm UST Tape for 19 to 22mm Road Rims  |

## SPOKES

|   |          |                                                              |
|---|----------|--------------------------------------------------------------|
| 2 | V4160901 | Kit 10 Front/Rear non Drive Side Stainless Spokes 268 Cosmic |
| 2 | V4160701 | Kit 2 Front/Rear non Drive Side stamped Stainless Spokes 268 |
| 2 | V3664401 | KIT 2 FRT/NDS COSMIC PRO CARBON UST STAMPED SPOKE 268mm - wh |
| 2 | V3664301 | KIT 10 FRT/NDS COSMIC PRO CARBON UST SPOKE 268mm - while sto |

## HUB SHELLS

|   |          |                                          |
|---|----------|------------------------------------------|
| 4 | M40318   | KIT 2 HUB BEARINGS 6001                  |
| 5 | 99603801 | SHORT EXPENSIBLE BEARING SUPPORTS > 2008 |
| 6 | 99603701 | FRONT AXLE QRM ROAD 2008                 |
| 7 | V2375101 | KIT 3 HUB CAPS AERO 9 SLOTS BLACK        |

## TYRES

|   |          |                       |
|---|----------|-----------------------|
| 8 | 39938825 | Yksion Pro UST 700x25 |
|---|----------|-----------------------|



# Cosmic Pro Carbon UST TDF

2019  
FRONT

## DELIVERED WITH

|                                                                       |                                                                                   |
|-----------------------------------------------------------------------|-----------------------------------------------------------------------------------|
| Mavic tyre sealant (rear wheel)<br>(355 466 01)                       |                                                                                   |
| BR301 quick releases<br>(V24 501 01 frt, V24 502 01 rear)             |                                                                                   |
| Tyre sealant syringe                                                  |                                                                                   |
| Carbon brake pads<br>(V24 603 01 Shimano/Sram, V24 604 01 Campagnolo) |                                                                                   |
| UST valve and accessories<br>(129 838 01)                             |  |
| Tubeless rim tape                                                     |                                                                                   |
| User guide                                                            |                                                                                   |

## COMPATIBILITY

|                                                                              |  |
|------------------------------------------------------------------------------|--|
| Freewheel: Shimano/Sram, convertible to Campagnolo with optional driver body |  |
| Front axle: Quick Release only                                               |  |
| Rear axle: Quick Release only                                                |  |

## Specifications

### RIMS

- **Material** : 3K carbon fibers
  - **Height** : 40 mm
  - **Drilling** : traditional
  - **Brake track** : carbon with iTgMAX technology
  - **Valve hole diameter** : 6.5 mm
  - **Tyre** : UST Tubeless and tubetype
  - **Internal width** : 19 mm
  - **ETRTO size** : 622x19TC Road
- Use with Mavic Tubeless Tape

### SPOKES

- **Material** : steel
- **Shape** : straight pull, flat, double butted
- **Nipples** : steel, ABS
- **Count** : front 18, rear 20
- **Lacing** : radial front and rear non-drive side, crossed 2 rear drive side

### WHEEL HUB

- **Front and rear bodies** : aluminum
  - **Axle material** : steel
- Sealed cartridge bearings (QRM)
- **Freewheel** : FTS-L steel

### WHEEL WEIGHTS

745