

# MAVIC Ellipse Pro Carbon UST

2019 FRONT

ASTM CATEGORY 1 : road only


For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't

exceed 120kg, bike included Recommended tyre sizes: 25 to 32 mm

Max. Pressure: see indication on wheel and tyre. If they differ, use the lower of the  $2\,$ 

## **REFERENCES WHEELS**

F87791 ELLPC65UST25 RB 700

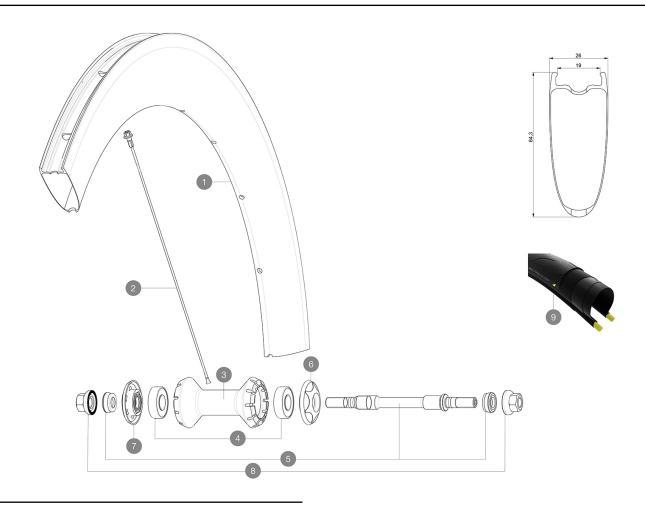

#### **RIMS**



#### :

1	V2739313	KIT REAR RIM COMETE PRO CARBON UST
1	V2737113	KIT REAR RIM COMETE PRO CARBON SL UST 19 - while stock last
	V3720101	25mm UST Tape for 19 to 22mm Road Rims

# **SPOKES**

2	V3668401	Kit 1 front 247mm and 1 rear 264mm stamped butted aero spoke
2	V3663101	KIT 12 FRT BUTTED AERO STAINLESS SPOKE 247 + alu nipple + wa

## **HUB SHELLS**

3	N/A	HUB BODY
3	N/A	HUB BODY
4	M40318	KIT 2 HUB BEARINGS 6001
5	32386101	ELLIPSE FRONT AXLE + FORK SUPPORTS
6	M40243	AXLE CAP
7	M40242	AXLE CAP + ADJUSTING NUT
8	32388601	2 AXLE BOLTS RR COMETE TRACK/ELLIPSE FT-RR M9

# MAVIC Ellipse Pro Carbon UST

2019 FRONT

## **DELIVERED WITH**

Mavic tyre sealant (rear wheel) (355 466 01)	
Tyre sealant syringe	
UST valve and accessories (129 838 01)	G 4100
Tubeless rim tape	
Multifonction adjustment wrench (325 423 01)	
User guide	

## **COMPATIBILITY**

Freewheel: fixed cog only, flip-flop hub (one cog possible on each hub side). Cog thread: 1,37x24TPI. Lock ring thread: left thread M33x1	
Front axle: for fixing nuts only (included), M10x1 thread	
Rear axle: for fixing nuts only (included), M10x1 thread	

# **Specifications**

## RIMS

• Material: 3K carbon fibers - Height: 64mm • Drilling: traditional

- Brake track : carbon with iTgMAX technology • Valve hole diameter: 6.5 mm • Tyre: UST Tubeless and tubetype Internal width: 19 mm ■ ETRTO size: 622x19TC Road Use with Mavic Tubeless Tape

#### **SPOKES**

- Material : steel

■ Shape: straight pull, aero, double butted

• Nipples: steel, ABS - Count: 20 front and rear • Lacing: front radial, rear crossed 2

#### WHEEL HUB

• Front and rear bodies : aluminum

-Axle material : steel

Adjustable sealed cartridge bearings (QRM+)

## Fixed cog VERSIONS ■ Color: Black only

WHEEL WEIGHTS

865