

CROSSRIDE DISC 11 - 15 mm

STANDARD
INTERNATIONALCENTER
LOCK




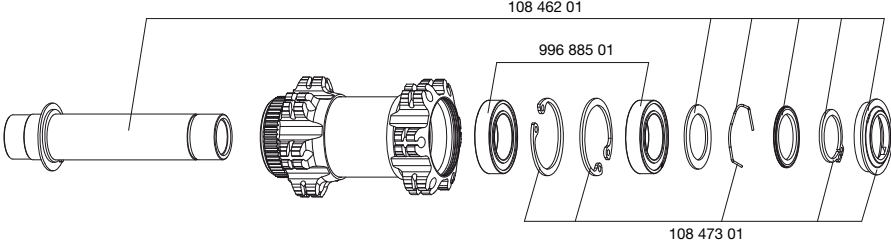
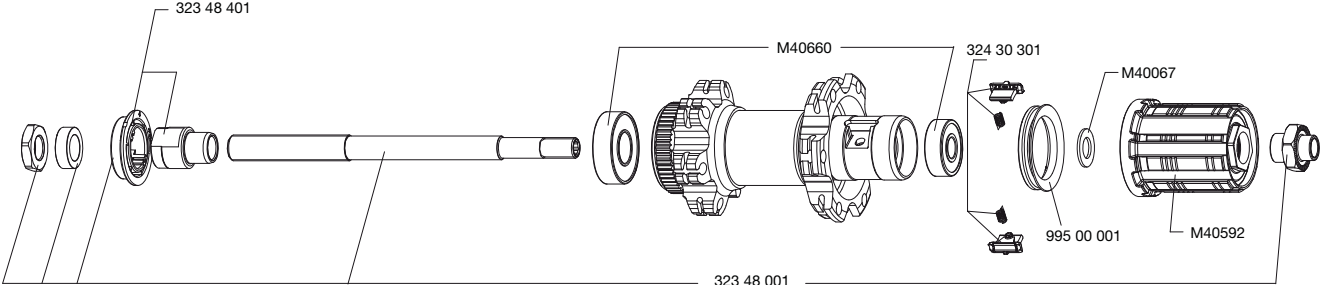
Use: use only on a Cross-country or Cross-mountain MTB fitted with disc brakes. Any other use (such as on a tandem, road bike, cyclo-cross bike, free-ride or downhill bike...) is highly inadvisable, is the sole responsibility of the user and voids the Mavic warranty.
Recommended maximum weight of the cyclist and equipment: 100 kg.

WHEEL WEIGHT WITHOUT QUICK-RELEASE SKEWER AND WITHOUT ADAPTER

Front: 835 g
Rear: 1015 g

WHEEL REFERENCES

Front: 111 850 10
Rear: 128 137 13
Pair: 111 853 14

RIMS	SALES REFERENCES: Front and rear: 120 216 15	
	 Ø VALVE HOLE Ø: 8.5 mm with 6.5 mm valve adapter Length: ≥ 32 mm	 RECOMMENDED TIRE WIDTH Dimensions: Ø 26" ETRTO 559 x 19C Recommended tire width: 1.5 to 2.3
HUBS	MAINTENANCE: Clean with a dry cloth or soapy water if necessary. Do not use a high-pressure washer.	
		
		
WHEEL BUILDING	REFERENCES AND LENGTHS: Front and rear: 995 435 01, length 271 mm (per 12, with nipples)	
FEATURES: Black bladed straight pull steel spokes with brass nipples	LACING PATTERN: Front and rear: 2-cross lacing on both sides	TENSION: Front: 100 to 120 kg Rear drive side: 120 to 140 kg
ACCESSORIES	WHEELS SUPPLIED WITH: <ul style="list-style-type: none"> Conventional alu quick-release skewer on rear: M40351 Rim tape 559x20x0.6 2 disc adapters for conversion from Center Lock to International Standard Wheel user guide 	
MAINTENANCE		Replacing the front axle and bearings Replacing the rear axle Maintaining and replacing the free wheel mechanism Replacing the rear bearings Replacing a spoke Replacing the front rim Replacing the rear rim
Refer to the website for quick and convenient access to information: www.tech-mavic.com		See 2010 TM, pages 21 and 22 See 2004 TM, page 20 See 2007 TM, page 21 See 2004 TM, page 22 See 2004 TM, page 25 See 2004 TM, page 28 See 2004 TM, page 29