# MAVIC Ksyrium UST

ASTM CATEGORY 1 : road only
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included
Recommended tyre sizes: 25 to 32 mm
Max. Pressure: 23mm 8.7 bars - 125 psi, 25/28mm 7.7 bars - 110 psi

## REFERENCES WHEELS

| | |
|---|---|
| F81321 | Ksyrium UST Ft |

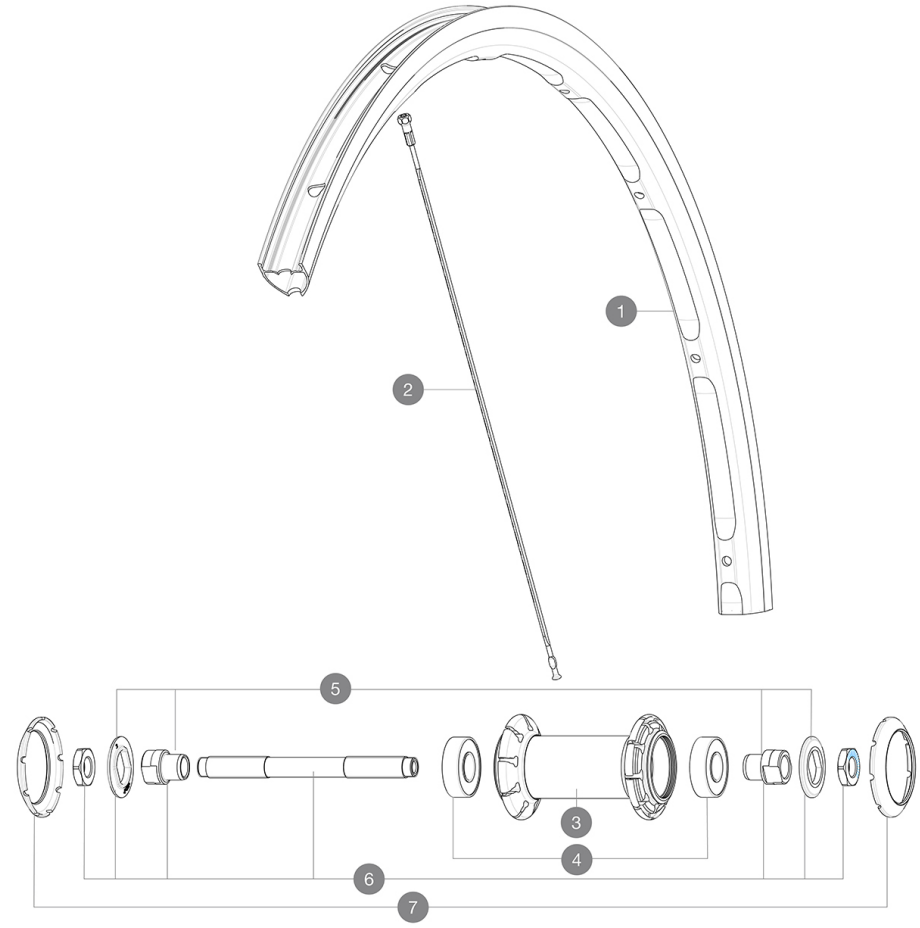




## RIMS

 :

| | | |
|---|---|---|
| 1 | V2735110 | KIT FRONT RIM KSYRIUM UST |
| | V3720101 | 25mm UST Tape for 19 to 22mm Road Rims |

## SPOKES

| | | |
|---|---|---|
| 2 | V3664701 | KIT 10 FRT/NDS AKSIUM ELITE UST FLAT SPOKE 282mm + nipple |

## HUB SHELLS

| | | |
|---|---|---|
| 4 | M40318 | KIT 2 HUB BEARINGS 6001 |
| 5 | 99603801 | SHORT EXPENSIBLE BEARING SUPPORTS > 2008 |
| 6 | 99603701 | FRONT AXLE QRM ROAD 2008 |
| 7 | V2375101 | KIT 3 HUB CAPS AERO 9 SLOTS BLACK |

## TYRES

| | | |
|---|---|---|
| 8 | 39938825 | Yksion Pro UST 700x25 |

Download date: 2024-07-16 / Update date: 2022-03-01

# MAVIC Ksyrium UST



## DELIVERED WITH

| | |
|---|---|
| Mavic tyre sealant (rear wheel) (355 466 01) | |
| Tyre sealant syringe | |
| BR101 quick releases (M40350 frt, M40351 rear road, M40352 rear MTB) | |
| UST valve and accessories (129 838 01) | |
| Tubeless rim tape | |
| User guide | |

## COMPATIBILITY

| | |
|---|---|
| Freewheel: Shimano/Sram, convertible to Campagnolo with optional driver body | |
| Front axle: Quick Release only | |
| Rear axle: Quick Release only | |

## Specifications

### RIMS

- **Material :** Maxtal
- **Height :** 25mm
- **Joint :** SUP
- **Drilling :** traditional
- **Brake track :** UB Control
- **Weight reduction :** ISM
- **Valve hole diameter :** 6.5 mm
- **Tyre :** UST Tubeless and tubetype
- **Internal width :** 19 mm
- **ETRTO size :** 622x19TC Road

Use with Mavic Tubeless Tape

### SPOKES

- **Material :** steel
- **Shape :** straight pull, flat, double butted
- **Nipples :** steel, ABS
- **Count :** front 18, rear 20
- **Lacing :** radial front and rear non-drive side, crossed 2 rear drive side

### WHEEL HUB

- **Front and rear bodies :** aluminum
- **Axle material :** steel

Sealed cartridge bearings (QRM)

- **Freewheel :** FTS-L steel

### WHEEL WEIGHTS

755

Download date: 2024-07-16 / Update date: 2022-03-01