


ASTM CATEGORY 3 : CROSS COUNTRY AND TRAIL RIDING  
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels don't exceed 120kg, bike included  
Recommended tyre sizes: 46mm to 64mm (1.8" to 2.5")

REFERENCES WHEELS

|        |                         |        |                      |
|--------|-------------------------|--------|----------------------|
| R22591 | E-Xa Elite 29 Rr Bst XD | R22241 | E-Xa Elite 29 Bst Rr |
|--------|-------------------------|--------|----------------------|

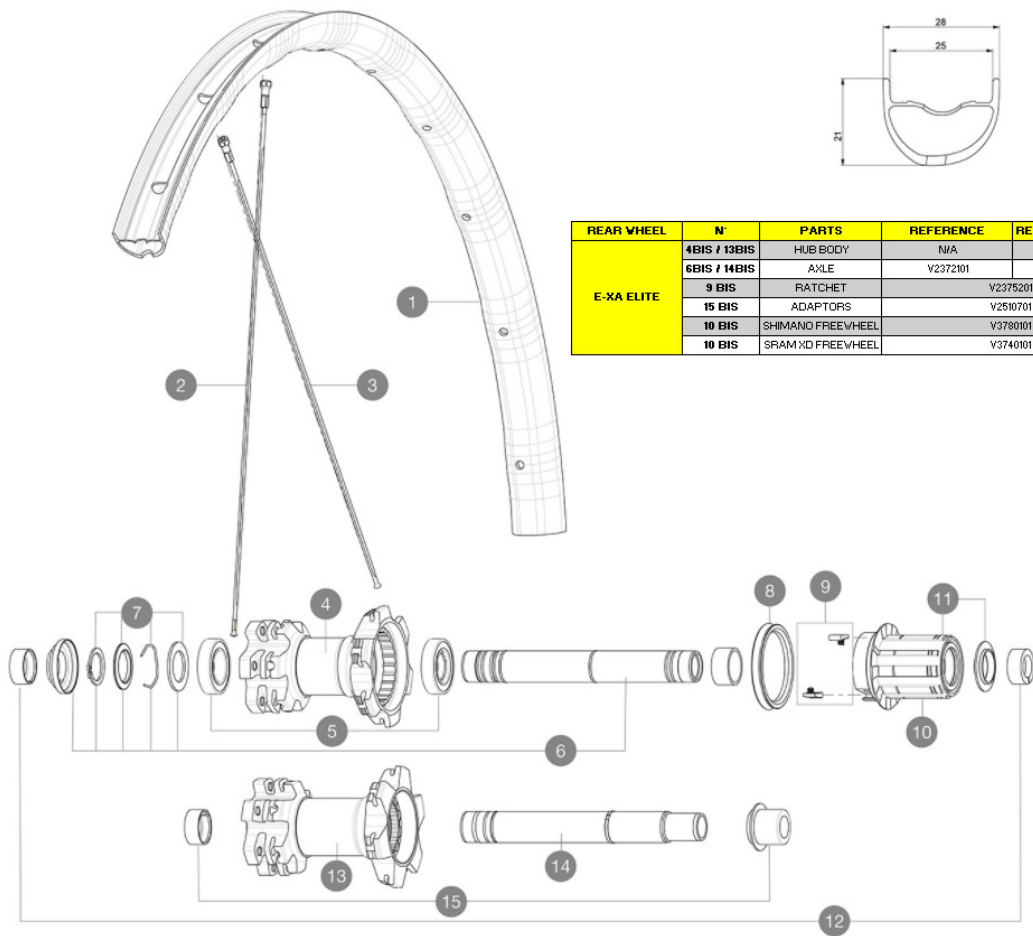

RIMS



&NBSP::

|   |          |                                           |
|---|----------|-------------------------------------------|
| 1 | V2990115 | KIT FT/RR RIM XA ELITE 29" 25mm BLACK TSS |
|   | V2700101 | UST Tape 28mm for 25 to 27mm wide rims    |

V2372201 KIT ID360 148 D6T AXLE WITH CLIP

ADAPTORS

|    |          |                                          |
|----|----------|------------------------------------------|
| 12 | 32965001 | ADAPTER Rr 12x142mm Elite/CRide MTB (Rd) |
| 15 | V2510701 | ID360V2RrAxleAdapt12x142/148             |
|    | V2510801 | ID360 V2 RrAxleAdapt9x135                |

SPOKES

|   |          |                                                         |
|---|----------|---------------------------------------------------------|
| 2 | V2382301 | KIT 12 DS XRIDE + FTSX/NDX XMAX EL/XA EL 29" SPK 297mm  |
| 3 | 35126201 | "KIT 12 DS XRIDE+E-XA ELITE 29"/KSYRIUM DISC SPK 293mm" |

HUB SHELLS

|    |          |                                                            |
|----|----------|------------------------------------------------------------|
| 4  | N/A      | HUB BODY                                                   |
|    | N/A      | HUB BODY                                                   |
| 5  | M40076   | HUB BEARINGS 17x30x7 6903 x 2                              |
| 6  | V2371701 | KIT AXLE 135/142mm ITS4 QRM AUTO                           |
|    | V2372101 | KIT ID360 135/142 D6T AXLE WITH CLIP                       |
| 7  | V2370401 | KIT REAR AUTO ADJUSTING PLAY 12mm AXLE                     |
| 8  | 99610701 | ITS-4 FREEWHEEL SEAL                                       |
| 9  | 99610601 | PAWLS KIT FOR ITS-4 (OR TS-2)                              |
|    | V2375201 | KIT ID360 24 TEETH 2 RATCHET + MTB SPRING + PAD (specific) |
| 10 | V3610101 | HG MTB FREEWHEEL BODY ITS4 QRM AUTO                        |
|    | V3780101 | HG9 Alloy MTB Freewheel Body ID360                         |
|    | V3740101 | XD MTB Freewheel Body ID360                                |
| 13 | N/A      | HUB BODY                                                   |
|    | N/A      | HUB BODY                                                   |
| 14 | V2371601 | KIT AXLE 148mm ITS4 QRM AUTO                               |



# E-XA Elite 29

DELIVERED WITH

|                                           |  |
|-------------------------------------------|--|
| UST valve and accessories<br>(129 838 01) |  |
| Tubeless rim tape                         |  |
| User guide                                |  |

COMPATIBILITY

|                               |  |
|-------------------------------|--|
| Freewheel: Shimano/Sram or XD |  |
|-------------------------------|--|

Specifications

RIMS

- **Material** : Mactal
- **Joint** : SUP
- **Drilling** : traditional
- **Weight reduction** : ISM 4D
- **Valve hole diameter** : 6.5 mm
- **Tyre** : UST Tubeless and tubetype
- **Internal width** : 25 mm
- **ETRTO size 27.5"** : 584x25TSS
- **ETRTO size 29"** : 622x25TSS

Hookless profile  
Use with Mavic Tubeless Tape

SPOKES

- **Material** : steel
- **Shape** : straight pull, flat, double butted
- **Count** : 24 front and rear
- **Lacing** : front and rear crossed 2

WHEEL HUB

- **Front and rear bodies** : aluminum
  - **Axle material** : aluminum
- Auto adjust sealed cartridge bearings (QRM Auto)
- **Freewheel** : ITS-4 QRM Auto alloy

VERSIONS

- **Color** : Black only
- **Disc standard** : 6 Bolts only
- **Hub width** : Boost only (front 110, rear 148)

WHEEL WEIGHTS