


ASTM CATEGORY 2 : road and offroad with jumps less than 15cm  
Maximum tyre pressure: 4.4bar/64PSI with a 28mm tyre - 2.6bar/38PSI with a 64mm tyre  
For a longer longevity of the wheel, Mavic recommends that the total weight supported by the wheels doesn't exceed 120kg, bike included  
Maximum tyre size: width 62mm - pressure max. 3.8Bar/55PSI

REFERENCES WHEELS

| Specifications       | Maxi target   |
|----------------------|---------------|
| Frontal run out      | 0,4mm         |
| Lateral run out      | 0,5mm         |
| Centrerig            | 1,0mm (2x0,5) |
| Tension daN FWB side | 100 > 121     |

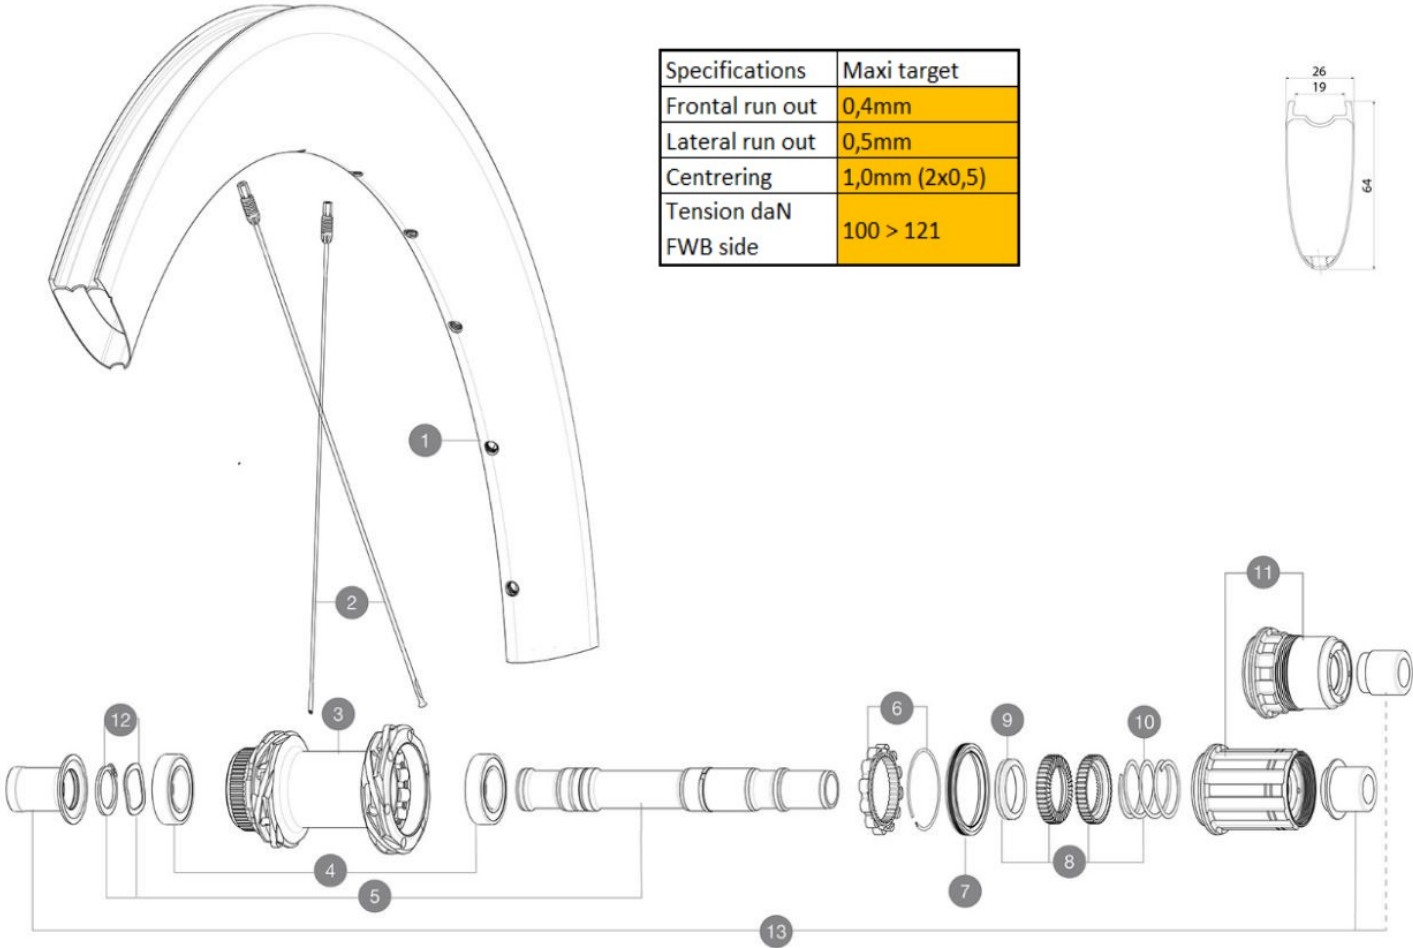

RIMS



&NBSP;:

|          |                                       |
|----------|---------------------------------------|
| V4094915 | Kit Front/Rear rim Cosmic SLR 65 Disc |
|----------|---------------------------------------|

SPOKES

|          |                                          |
|----------|------------------------------------------|
| V4164901 | Kit 12 CosmicSLR65 Disc aero sspk M6 259 |
|----------|------------------------------------------|

HUB SHELLS

|    |           |                                                       |
|----|-----------|-------------------------------------------------------|
| 3  | N/A       | HUB BODY                                              |
| 3  | N/A       | HUB BODY                                              |
| 4  | M40076    | HUB BEARINGS 17x30x7 6903 x 2                         |
| 5  | V00046431 | KIT AXE ID360 142LIGHT CL+CIR                         |
| 6  | V2252701  | KIT ID360 INSERT SHAPED EAR LOBE > 2017               |
| 7  | V2251601  | KIT ID360 SEAL + GREASE                               |
| 8  | V2251701  | KIT ID360 2 RATCHETS + SPRING + GREASE                |
| 9  | V2500501  | KIT ID360 3 PADS NOISE REDUCING                       |
| 10 | V2251801  | KIT 3 ID360 ROAD SPRINGS                              |
| 11 | V3430101  | HG11 Freewheel Body ID360                             |
| 11 | V2580101  | FREEHUB BODY XD Road ID360                            |
| 12 | V2373001  | KIT ADJUST. SYSTEM QRM AUTO ID360 for 17x30x7 bearing |

OPTIONS

|          |                                         |
|----------|-----------------------------------------|
| V2373401 | KIT ID360 135/142 DCL L1 AXLE WITH CLIP |
|----------|-----------------------------------------|

ADAPTERS

|    |          |                                    |
|----|----------|------------------------------------|
| 13 | V3811001 | KIT ROAD ID360 RR CL ENDCAP (12MM) |
|    | V2510901 | ID360 EVO RrAxeAdpt12x135/150      |
|    | V2510801 | ID360 V2 RrAxeAdapt9x135           |



# COSMIC SLR 65 BG

### DELIVERED WITH

|                                                 |  |
|-------------------------------------------------|--|
| Mavic tyre sealant (rear wheel)<br>(355 466 01) |  |
| UST valve and accessories<br>(129 838 01)       |  |
| User guide                                      |  |

### COMPATIBILITY

|                                                                                                             |  |
|-------------------------------------------------------------------------------------------------------------|--|
| Freewheel body: convertible SRAM XD road (kit V2580101 sold separately)                                     |  |
| Freewheel body: convertible SHIMANO HG light road (kit V3850101 sold separately)                            |  |
| Freewheel body: convertible SHIMANO MS (kit V3990101 sold separately)                                       |  |
| Freewheel body: convertible CAMPAGNOLO ED (kit V3440101 sold separately)                                    |  |
| Freewheel body: convertible CAMPAGNOLO N3W (kit V4270101 sold separately)                                   |  |
| ID360 Campagnolo freewheel body ([V3440101])                                                                |  |
| FTS-L Shimano / Sram freewheel body ([30871101] - Delivered on the wheel)                                   |  |
| ID360 Sram XD freewheel body ([V3740101])                                                                   |  |
| Rear axle: for fixing nuts only (included), M9x1 thread                                                     |  |
| ID360 Shimano Micro Spline alloy freewheel body ([V3990101])                                                |  |
| Front axle: convertible from 15mm thru axle to Quick Release with adapters (delivered with non-boost wheel) |  |

### Specifications

#### RIMS

- **Material** : 100% carbon fiber with UDÂ² external layer
  - **Height** : 64mm
  - **Internal width** : 19 mm
- Fore Carbon tapeless tubeless technology
- Disc brake specific profile
- **ETRTO size** : 622x19TC
  - **Tire** : UST Tubeless and tubetype

#### SPOKES

- **Material** : steel
  - **Shape** : straight pull, elliptical aero, double butted (patented)
  - **Screw** : M6
- R2R carbon spoke technology

#### WHEEL HUB

- **Body** : aluminum
- **Body design** : INFINITY
- **Disc standard** : Center LockÂ® only
- **Axle material** : aluminum
- **Axle size** : front 12x100 / rear 12x142 - Convertible to quick release with included adapters
- **Axles** : Front 15X110 (Boost) or 15x100 ; Rear 12X148 (Boost) or 12x142
- **Freewheel** : Shimano HG road
- **Freewheel** : FTS-L steel

#### WHEEL WEIGHTS